

HPR-2XW Series

Electrically Heated Pressure Regulator

Introduction

The HPR-2XW Series heated pressure regulator is designed to supply heat to samples entering instrumentation systems. It can be used to preheat liquids, to prevent condensation of gases or to vaporize liquids prior to gas analysis.

The modular design of the HPR-2XW consists of heat exchanger and pressure control sections. The pressure control section is patterned after the time-proven design of the PR-1 pressure reducing regulator and provides the same excellent outlet pressure stability. The heat exchanger section is made up of a body and heat exchange element. The heat exchange element uses GO Regulator's unique spiral wrapped screen as the heat exchanger surface. This screen has up to 100 square inches of heat transfer area and precise design forces all sample flow to pass through the element. Completing this modular design is the incorporation of a removable heat exchanger unit. This allows the user to remove and clean, or replace the exchanger. This is especially useful when heating dirty liquids or liquids that polymerize and clog the heat exchange screen.

The HPR-2 Series of vaporizing pressure reducing regulators are both CSA and ATEX approved. The electrical components of this unit are securely housed in a Class A,B,C,D conduit assuring that there is always an adequate flame path between the environment and the controller. Safety considerations can be further enhanced by using the optional TCO (Thermal Cut Out) heater cartridge. This feature enables the unit to boast a T3 rating with up to 250 watts of power. (CSA T2D rating for 250W).



pressure regulators

Typical Applications

Analytical process sample conditioning systems:

- Petrochemical refineries
- Chemical production facilities
- Pilot plants (chemical & petrochemical)
- LNG loading and off-loading points
- Natural gas pipeline sampling

Technical Data

CONSTRUCTION	316L stainless steel
OUTLET PRESSURES	0-10, 0-25, 0-50, 0-100, 0-250, 0-500, 0-750, and 0-1000 psig
OPERATING TEMPERATURE	up to 380° F (193° C)
HEATING CAPACITY RANGES (IN WATTS)	40, 50, 100, 150, 200, and 250
C_v COEFFICIENTS	0.06, 0.025, 0.2
CERTIFICATIONS	CSA certification # LR-82566-5 ATEX Directive 2014/34/EU Certification # TRLO3ATEX11001X

Features & Benefits

- Optional HASTELLOY® C-276 & MONEL®
- Electropolished body with better than 25 Ra finish in diaphragm cavity for an optimal sealing surface
- Bubble-tight shutoff
- Modular pressure control and heat exchanger assemblies for easy maintenance
- Unique spiral wrapped heat exchange element provides up to 100 square inches of heat transfer area.
- Available in 120VAC or 230VAC
- Optional TCO for T3 operation
- INCONEL® diaphragm standard

HPR-2XW Series

To Order, contact your local Distributor Link below:
www.goreg.com/distributor/index.htm

Verify that your chosen part number is valid using the GO Wizards at
www.goreg.com/products/matrix/index.htm

How to Order

Standard items in bold

H2 - 1 Z 2 3 Q 3 E 6 1 1 7

BODY MATERIAL

- 1** 316L stainless steel, stainless steel diaphragm
- C** 316L stainless steel, INCONEL® diaphragm
- 4 MONEL®, INCONEL® diaphragm
- 6 HASTELLOY® C, INCONEL® diaphragm

PORT CONFIGURATION

- Z** One inlet port, one outlet port
- For more configurations, see pages 38-45

TEMPERATURE RANGE / HEATING TYPE

- 1** 55°-85°F (13-29°C)
- 2** 75°-175°F (24-80°C)
- 3** 130°-300°F (54-149°C)
- 4** 260°-380°F (126-194°C)
- 6** No electronics

HEATER WATTAGE

- 1** 40W
- 2** 50W
- 3** 100W
- 4** 150W
- 8** 200W
- 9** 250W
- 6** No electronics

SEAT MATERIAL

- A** Tefzel®
- B** CF PTFE
- H** PCTFE
- Q** PEEK™

FLOW COEFFICIENT (Cv)

- 3** **0.06**
- 5** **0.2**
- C** **0.025**

OPTIONS (NOT REQUIRED)

- B** EB5 cleaning
- D** Helium leak test
- E** Pressure test certificate
- F** Certificate of Conformity
- G** CMTR

OPTIONS

- 1** TCO thermistor
- 5** 6000 psig inlet w/TCO thermistor (1-pc assy.)
- 4** 6000 psig inlet w/standard thermistor (1-pc assy.)
- 0** Other options

CAP ASSEMBLY

- 1** Tamper-proof, standard, stainless steel
- 4** Tamper-proof, panel, mount, stainless steel
- 7** Tamper-proof, captured vent, stainless steel
- J** Tamper-proof, captured vent, panel mount, stainless steel
- L** BP-6 topworks

HEATER BLOCK PORTING

- 1** Standard block
 - 2** Extra outlet block
- For more blocks, see pages 36-37

HEATER BLOCK TYPE

- 6** 120 VAC, HPR-2XW
- 7** 230 VAC, HPR-2XW

OUTLET RANGE

- C** 0-10 psig
- D** 0-25 psig
- E** 0-50 psig
- G** 0-100 psig
- I** 0-250 psig
- J** 0-500 psig
- W** 0-750 psig
- K** 0-1000 psig (BP-6 topworks)

NOTE: 1. Contact the factory for any additional requirements.
 2. Units that will be used for flammable liquid or gas with fire point at 200°C or below require the TCO Thermistor. It is also recommended to use the 1-PC body option. In addition, Tefzel and PCTFE seats in these units are recommended to use the captured vent cap option which provides for venting to a safe location.

Maximum Temperature & Operating Inlet Pressures

HPR-2XW Electric 2-piece Assembly

(Heater block and regulator body separate)

SEAT MATERIAL	MAXIMUM TEMPERATURE	@	MAXIMUM OPERATING INLET PRESSURE
	Up to 175° F (80° C)	@	3600 psig (24.82 MPa)
Tefzel®	176° F to 300° F (80° C to 148° C)	@	1000 psig (6.90 MPa)
CF PTFE & PCTFE	301° F to 380° F (148° C to 193° C)	@	400 psig (2.76 MPa)
PEEK™	Up to 380° F (193° C)	@	3600 psig (24.82 MPa)


HPR-2XW Electric 1-piece Assembly

(Integral heater block and regulator)

SEAT MATERIAL	MAXIMUM TEMPERATURE	@	MAXIMUM OPERATING INLET PRESSURE
	Up to 175° F (80° C)	@	3600 psig (24.82 MPa)
Tefzel®	176° F to 300° F (80° C to 148° C)	@	1000 psig (6.90 MPa)
CF PTFE	301° F to 380° F (148° C to 193° C)	@	400 psig (2.76 MPa)
	Up to 175° F (80° C)	@	6000 psig (41.37 MPa)
PCTFE	176° F to 300° F (80° C to 148° C)	@	1000 psig (6.90 MPa)
	301° F to 380° F (148° C to 193° C)	@	400 psig (2.76 MPa)
PEEK™	Up to 380° F (193° C)	@	6000 psig (41.37 MPa)

HPR-2XW Series

Maximum Temperature & Operating Inlet Pressures

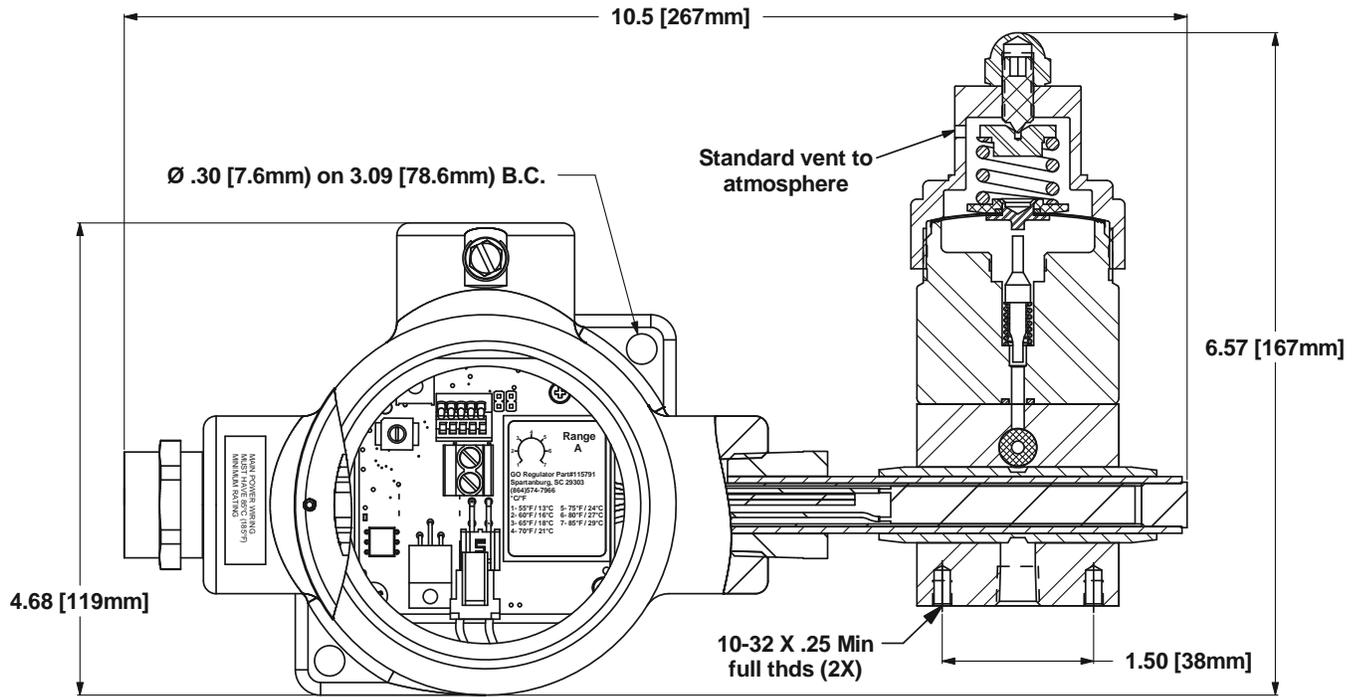

Panel mount option requires
1.390" (35.3mm) minimum
diameter panel cut out
Weight 8.7 lbs (3.95 kg)

