

# Servo-controlled solenoid valve NC, DN 7

# Product Information



**A. u. K. Müller**

Solenoid valves  
Control valves  
Special valves and systems

A. u. K. Müller GmbH & Co. KG  
Dresdener Str. 162  
D-40595 Düsseldorf/Germany

Tel.: +49(0)211-7391-0  
Fax: +49(0)211-7391-281

e-mail: info@akmueller.de  
Internet: www.akmueller.de

## Series I.007.III



### Characteristics

- Servo-controlled
- Normally closed (NC)
- Solenoid replaceable while medium circuit remains untouched, solenoid rotatable 4x90°
- Suitable for hot water up to 90 °C
- Similar performance for alternating or direct current
- Long term performance capability
- Optimized water hammer characteristic by low noise emission according to EN 60730
- High operating safety by the use of high quality materials and 100% final testing of the products

### Applications

- Steam appliances
- Dental appliances
- Hot / cold drink dispensers
- Industrial appliances
- Air conditioning
- Agricultural implements
- Pollution equipment
- Temperature equalisers
- Dish washers
- Ice machines
- Washing machines
- Water treatment

### Description

2/2-way solenoid valve of nominal diameter DN 7 for use with cold and heated potable water and physically and chemically similar media. The valve is servo-controlled and normally closed (NC).

Valves of this design are single chamber valves with the inlet ninety degrees to the outlet and can be manufactured with various connections.

Coil systems for common voltage and frequency ranges are available.

Electrical operating safety is achieved by insulation class F and can be supported by an integrated protective circuit.


By using high quality insulation materials, continuous duty (100 % ED) at higher medium temperatures is possible. The glass fibre reinforced polyamide valve body persists hot water. Protection against corrosion of inner parts exposed to the medium is achieved by using stainless steel.

### Possible approvals

Approved versions available on request:


- KTW/W270
- SVGW
- WRAS
- NSF 169
- UL
- VDE
- Others on request

typical performance curve

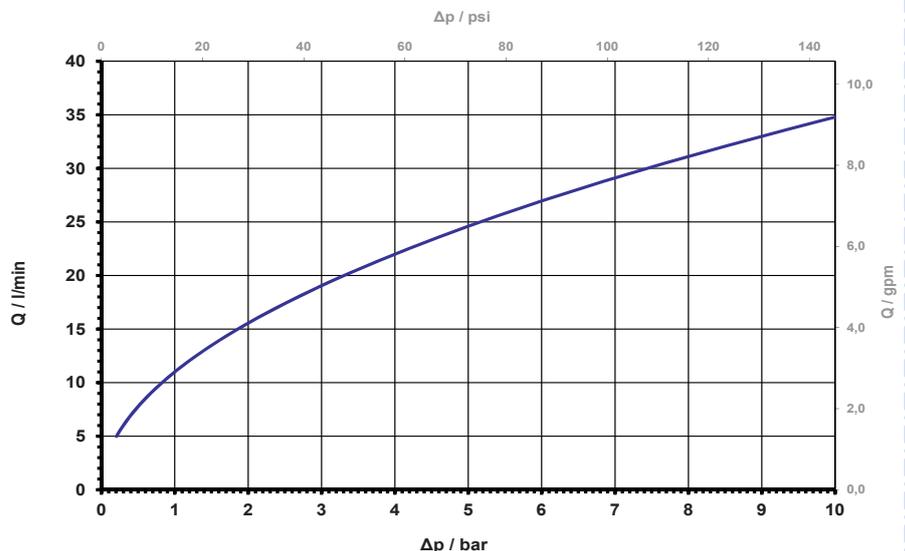



**Series I.007.III**

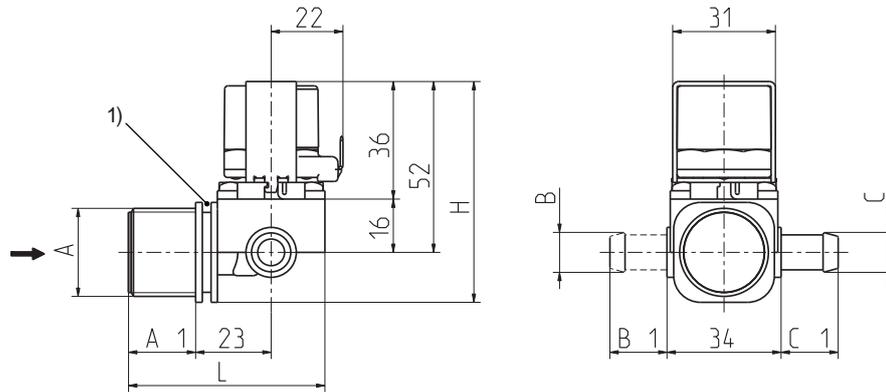


1) Fixing groove

**Technical Data**

<b>Type</b>	solenoid valve	
<b>Construction</b>	2/2-way single chamber valve inlet ninety degree to outlet, servo-controlled	
<b>Function</b>	NC (normally closed)	
<b>Fitting position</b>	any, preferably with coil upwardly	
<b>Media</b>	cold and heated potable water and physically and chemically similar media	
<b>T-Medium</b>	90	°C max.
<b>T-Ambient</b>	70 (60)	°C max. °C max. USA and coils MS.028)
<b>DN</b>	7	mm
<b>p-Operating</b>	0,2 - 10	bar
<b>Cv-value</b>	11	l/min
<b>Flow regulator</b>	on request	
<b>Pressure surge</b>	according to EN 60730	
<b>Coil type</b>	MS.026, MS.028	
<b>Nominal voltages</b>	220 - 240 110 110 - 127 24 12 24 12	V AC 50-60 Hz V AC 50 Hz V AC 60 Hz V AC 50/60 Hz V AC 50/60 Hz V DC V DC
	other voltages on request	
<b>Voltage tolerance</b>	+10% -15%	
<b>Duty cycle</b>	100%	
<b>Nominal power</b>	6,5 W	7,5 VA (AC only)
<b>Protection Type</b>	IP 00 up to IP 68	
<b>Coil connections</b>	flat tabs 6,3 x 0,8 mm several cable connections (IP67, IP68)	
<b>Insulation class</b>	F	according to EN 60730
<b>Protection class</b>	I	according to EN 60730 (for incorporation in class I)

**Materials**

<b>Valve body</b>	PA 66 glass fibre reinforced PPE on request PEI on request (T-medium max. 30 °C)
<b>Plunger guide</b>	stainless steel
<b>Plunger and spring</b>	stainless steel
<b>Membrane and sealings</b>	EPDM NBR (on request) VMQ (on request)
<b>Coil coating</b>	PBT,PET or epoxy resin
<b>Filter</b>	POM (in inlet) stainless steel on request



**Options**

Material	Inlet		Outlet		Length L	Height H
	Ø A	A1	B/C	Ø		
PA 66	G 3/4	20	C	12,0 Nozzle	C1 17,0	67
PA 66	G 1/2	15	C	G 3/8	C1 13,0	67
PA 66	3/8 NPT	13,5	C	1/4 NPT	C1 13,5	67
PA 66	G 3/8	13	B	G 3/8	B1 13,0	67
PA 66	G 3/4	20	B	12,0 Nozzle	B1 17,0	67
PA 66	3/8 NPT	13,5	B	1/4 NPT	B1 13,5	67
PA 66	1/4 NPT	15	C	1/4 NPT	C1 13,5	67
PA 66	1/4 NPT	15	B	1/4 NPT	B1 13,5	67
PA 66	G 1/2	15	B	12,0 Nozzle	B1 17,0	67

