

Safety Standard ISO 13849-1 Certified\*<sup>2</sup> (Corresponding to Categories 2 to 4)

# 3-Port Solenoid Valve/ Residual Pressure Release Valve with Detection of Main Valve Position



\*1 Refer to page 2 for compliant products.



\*2 Refer to page 2 for certified products.

## With main valve position detection function

### Category 2

The main valve position detection function is used to detect inconsistencies between input signals and valve operations.

Residual pressure release valve  
Safety limit switch



Body ported  
VP542-X536




Base mounted  
VP544-X536

## With easy-to-construct redundant system


### Categories 3 and 4

When the dual residual pressure release valve is used, if one of the valves fails to operate, the other one releases the residual pressure.

### Dual Residual Pressure Release Valve VP544-X538

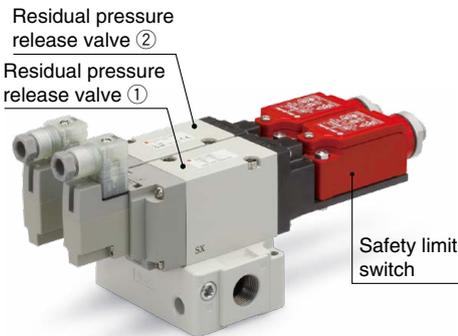

### With Soft Start-up Function VP544-X555

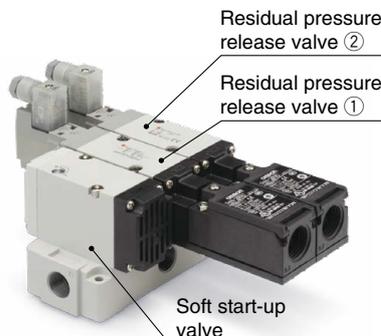

### Dual Residual Pressure Release Valve VG342-X87



### Redundant System

A system in which even if one part fails, the system as a whole will still fulfill its required function. This is usually achieved through the incorporation of dual channels of operation such as dual valves, dual wiring, dual guard switches, etc.




# VP/VG Series



CAT.ES11-111B

**With main valve position detection function (Category 2)**

**Category 2** The safety function only requires the use of a single channel and is automatically checked.

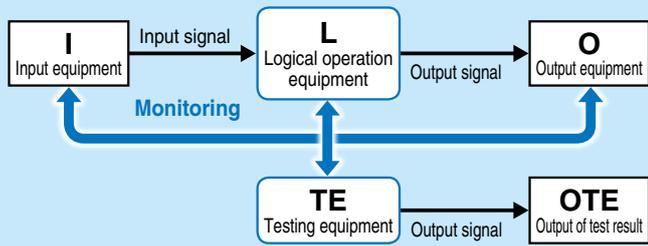

The main valve position detection function is used to detect inconsistencies between input signals and valve operations.

Input equipment (I): Detection equipment (sensor) of starting event  
 Logical operation equipment (L): Relay sequence circuit, PLC control program  
 Output equipment (O): Solenoid valve, Electromagnetic switch, Output relay  
 Recommended valve: VP54□/74□-X536




VP542-X536

\* This product is to be used as a component of a safety system; the safety of the equipment as a whole cannot be guaranteed by this single unit alone.

**With easy-to-construct redundant system (Categories 3 and 4)**


**Category 3** The redundancy prevents the loss of the safety function when a single failure occurs. The safety function must be checked before each use. An accumulation of undetected faults can cause the loss of the safety function.

**Category 4** The redundancy prevents the loss of the safety function when a single failure occurs. The safety function must be checked before each use. An accumulation of undetected faults does not affect the safety function. (Features a higher DC and MTTFd than Category 3)

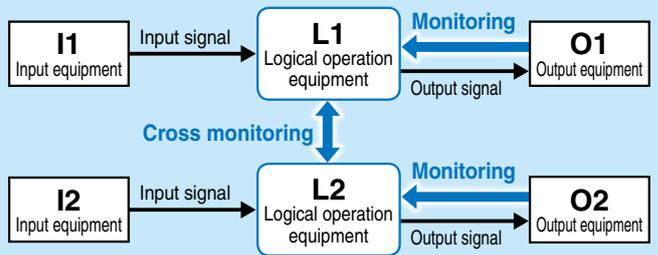

When the dual residual pressure release valve is used, if one of the valves fails to operate, the other one releases the residual pressure.


Input equipment (I1, I2): Detection equipment (sensor) of starting event  
 Logical operation equipment (L1, L2): Relay sequence circuit, PLC control program  
 Output equipment (O1, O2): Solenoid valve, Electromagnetic switch, Output relay  
 Recommended valve: VP544/744-X538, VG342-X87

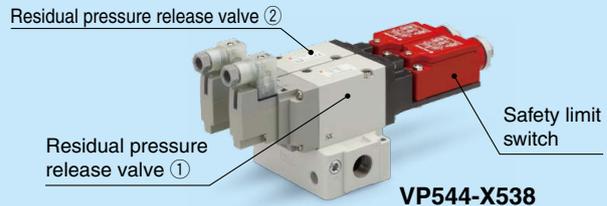

VP544-X538

**Highly reliable construction**


① The main valve position is detected by relaying the main valve's movements directly to the reed safety limit switch via the rod.

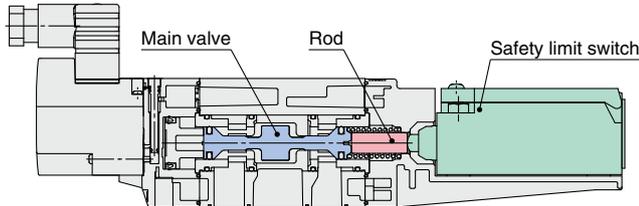

- ② Long service life: B<sub>10D</sub>: 10 million cycles\*1
- ③ The return spring ensures the release of residual pressure regardless of the pressure level.


\*1 For the VP500/700, the safety limit switch made by OMRON

**A variety of safety limit switches can be selected.**

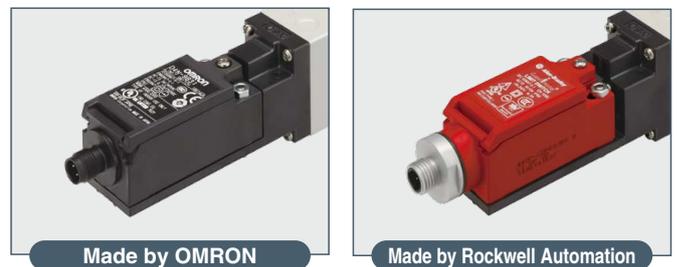


Conduit (VP series only) and M12 connector (4 pin) types are available. An M12 connector type with 6 pins is available.

**With soft start-up function (-X555)**

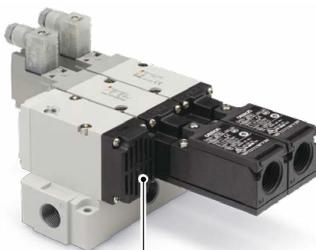


VP544-X555

- A function to gradually increase the initial pressure of the pneumatic system has been added to the dual residual pressure release valve.
- Fixed orifice and variable throttle are available as throttle options for adjusting the pressure increase. (ø1, ø1.5, ø2)

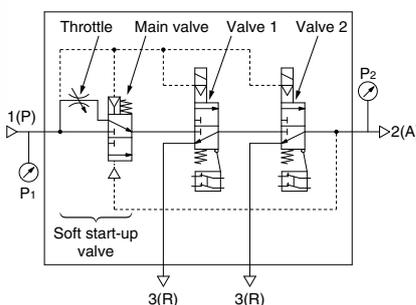

**Output Pressure (P<sub>2</sub>) vs Time Graph**

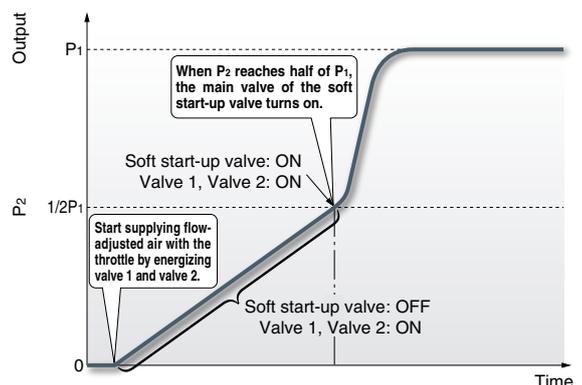

## Standards and Enclosure

Model	Category	Safety limit switch manufacturer	Standards						
			Machinery directive Harmonized standards	2006/42/EC		CE	cUL		RoHS
				EN ISO 13849-1:2015	EN ISO 13849-2:2012		EN ISO 4414:2010	Body ported	
Residual Pressure Release Valve VP54□/74□-X536 <b>IP65</b> <a href="#">Page 3</a>	2	OMRON Corporation							
		Rockwell Automation, Inc.							
Dual Residual Pressure Release Valve VP544/744-X538 <b>IP65</b> <a href="#">Page 3</a>	3, 4	OMRON Corporation							
		Rockwell Automation, Inc.							
Dual Residual Pressure Release Valve with Soft Start-up Function VP544/744-X555 <b>IP65</b> <a href="#">Page 4</a>	3, 4	OMRON Corporation							
		Rockwell Automation, Inc.							
Dual Residual Pressure Release Valve VG342-X87 <b>IP40</b> <a href="#">Page 23</a>	3, 4	OMRON Corporation							
		Rockwell Automation, Inc.							

## Series Variations

Model	Category	Port size	Thread	Flow-rate characteristics C [dm <sup>3</sup> /(s·bar)] 1→2 (P→A)				
				5	10	15	20	25
				Residual Pressure Release Valve VP54□-X536	2	3/8	Rc, G, NPT	8.9*1
Residual Pressure Release Valve VP74□-X536	1/2	Rc, G, NPT	15.1*1					
Dual Residual Pressure Release Valve VP544-X538	3, 4	3/8	Rc, G, NPT	6.5				
Dual Residual Pressure Release Valve VP744-X538		1/2	Rc, G, NPT	10.3				
Dual Residual Pressure Release Valve with Soft Start-up Function VP544-X555	3, 4	3/8	Rc, G, NPT	5.2				
Dual Residual Pressure Release Valve with Soft Start-up Function VP744-X555		1/2	Rc, G, NPT	9.8				
Dual Residual Pressure Release Valve VG342-X87		3/4	Rc, G, NPT	26.6				

\*1 For the body-ported type

For details on Safety Standard ISO 13849-1, refer to Guide to Products Conforming to International Standards on the SMC website.


### Can be connected to modular type

#### F.R.L. units [Page 20](#)

#### Applicable models\*1

- VP544/744-X536
- VP544/744-X538
- VP544/744-X555

\*1 Please contact SMC for the VP542/742-X536.

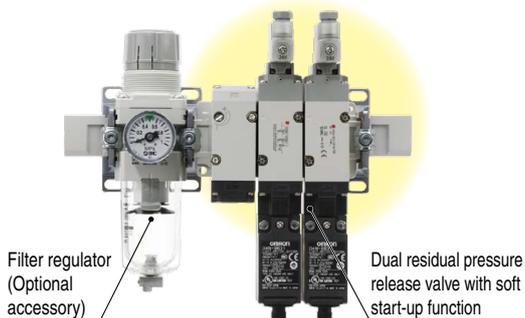


# 3-Port Solenoid Valve/ Residual Pressure Release Valve with Detection of Main Valve Position

## VP500/700-X536, X538, X555



### How to Order

#### Residual Pressure Release Valve

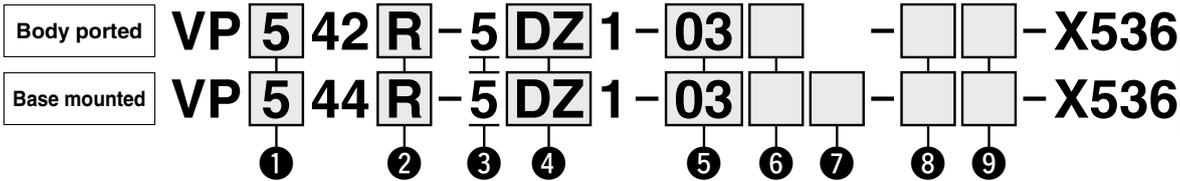

#### 1 Series

5	VP500
7	VP700

#### 2 Pilot

Nil	Internal pilot
R	External pilot

#### 3 Voltage

5	24 VDC
---	--------

#### 4 Electrical entry

DZ	DIN terminal, With light/surge voltage suppressor
YZ	DIN (EN 175301-803) terminal, With light/surge voltage suppressor

\* Refer to Installation on page 22 before selecting the internal pilot type.

\* Refer to page 22 for details on Y type.

#### 5 Port size

Symbol	Port size	VP500	VP700
03	3/8	●	—
04	1/2	—	●

#### 7 Bracket for modular connection (Modular adapter)

		VP544	VP744
Nil	None	—	—
M	Yes	●	●
M1	Yes	●	—

#### 8 Safety limit switch/ Wiring

Nil	G1/2 (Made by OMRON)
M	M12 connector (Made by OMRON)
S1	M12 connector (Made by Rockwell Automation)

#### 9 With check valve (Only external pilot)

Symbol	Check valve	Applicable tube O.D.	Thread		
			Rc	G	NPT
Nil	None	—	●	●	●
A	Yes	ø6	●	—	—
B		ø1/4"	—	—	●

\* A check valve is installed on the external pilot port.

\* Refer to Piping for External Pilot Type on page 5 for selection of the check valve.


#### 6 Thread

Nil	Rc
F	G
N	NPT

#### Part Nos./With Modular Adapter

Applicable model	Ordering symbol	Combinable modular adapter part no.	Applicable spacer
VP544□-5□1-03	M	<b>E310-U03</b>	Y300-A, Y300T-A
VP544□-5□1-03	M1	<b>E410-U03</b>	Y400-A, Y400T-A
VP744□-5□1-04	M	<b>E410-U04</b>	Y400-A, Y400T-A

#### Dual Residual Pressure Release Valve

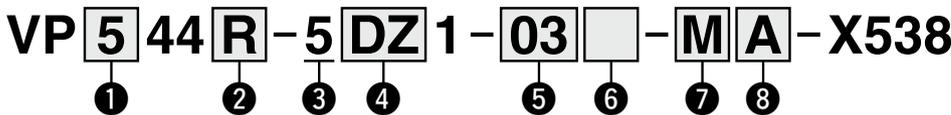

#### 1 Series

5	VP500
7	VP700

#### 2 Pilot

Nil	Internal pilot
R	External pilot

#### 3 Voltage

5	24 VDC
---	--------

#### 4 Electrical entry

DZ	DIN terminal, With light/surge voltage suppressor
YZ	DIN (EN 175301-803) terminal, With light/surge voltage suppressor

\* Refer to Installation on page 22 before selecting the internal pilot type.

\* Refer to page 22 for details on Y type.

#### 5 Port size

Symbol	Port size	VP500	VP700
03	3/8	●	—
04	1/2	—	●

#### 6 Thread

Nil	Rc
F	G
N	NPT

#### 7 Safety limit switch/ Wiring

Nil	G1/2 (Made by OMRON)
M	M12 connector (Made by OMRON)
S1	M12 connector (Made by Rockwell Automation)

#### 8 With check valve (Only external pilot)

Symbol	Check valve	Applicable tube O.D.	Thread		
			Rc	G	NPT
Nil	None	—	●	●	●
A	Yes	ø6	●	—	—
B		ø1/4"	—	—	●

\* For the internal pilot, the symbol is nil.

\* Refer to Piping for External Pilot Type on page 5 for selection of the check valve.

## How to Order

### Dual Residual Pressure Release Valve with Soft Start-up Function



VP **5** 44 **□** - 5 **DZ** 1 - **03** **□** - **M** **□** **□** - X555

①
②
③
④
⑤
⑥
⑦
⑧
⑨

#### ① Series

5	VP500
7	VP700

#### ② Pilot

Nil	Internal pilot
R	External pilot

\* Refer to Installation on page 22 before selecting the internal pilot type.

#### ③ Voltage

5	24 VDC
---	--------

#### ④ Electrical entry

DZ	DIN terminal, With light/surge voltage suppressor
YZ	DIN (EN 175301-803) terminal, With light/surge voltage suppressor

\* Refer to page 22 for details on Y type.

#### ⑤ Port size

Symbol	Port size	VP500	VP700
03	3/8	●	—
04	1/2	—	●

#### ⑥ Thread

Nil	Rc
F	G
N	NPT

#### ⑦ Safety limit switch/Wiring

Nil	G1/2 (Made by OMRON)
M	M12 connector (Made by OMRON)
S1	M12 connector (Made by Rockwell Automation)

#### ⑧ With check valve (Only external pilot)

Symbol	Check valve	Applicable tube O.D.	Thread		
			Rc	G	NPT
Nil	None	—	●	●	●
A	Yes	ø6	●	—	—
B		ø1/4"	—	—	●

\* A check valve is installed on the external pilot port.

\* Refer to Piping for External Pilot Type on page 5 for selection of the check valve.

#### ⑨ Throttle

Nil	Variable throttle
10	ø1 fixed orifice
15	ø1.5 fixed orifice
20*1	ø2 fixed orifice

\*1 VP700 only

## Made to Order

### 1 Series Compatible with Secondary Batteries

For details on 25A-, refer to the Web Catalog "Series Compatible with Secondary Batteries/25A- Series."

#### How to Order

25A-VP **□** 4 **□** **□** - 5 **DZ** 1 - **□** **□** **□** - **□** **□** **□** - X536  
 X538  
 X555

● Fill in according to How to Order above.

● Secondary battery compatible

\* Electrical entry can be selected only for D type. Check valve type is available only when the thread type is Rc.

\* There are no settings for the bracket for modular connection for the 25A-VP500/700-X536.

VP500/700

Symbols

X536

X538

X555

Optional Accessories

Specific Product Precautions


VG342

Symbols

X87

Specific Product Precautions

# VP500/700-X536, X538, X555

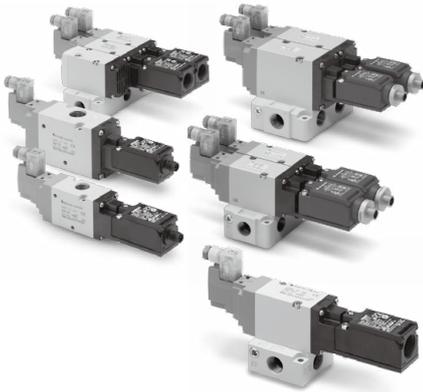

## Valve Specifications

Fluid	Air	
Type of actuation	N.C. (Spring return)	
Operation	Internal pilot	External pilot
Operating pressure range	0.25 to 0.7 MPa	0.25 to 0.7 MPa
External pilot pressure	—	0.25 to 0.7 MPa (Same as operating pressure)
Maximum operating frequency	30 cycles/minute	
Minimum operating frequency	1 cycle/week	
Operating and ambient temperatures	-10 to 50°C (No freezing)	
Ambient humidity	20 to 90% RH (No condensation)	
Manual override	None	
Pilot exhaust	Individual exhaust	
Lubrication	Not required	
Mounting orientation	Unrestricted	
Impact/Vibration resistance	150/30 m/s <sup>2</sup>	
Enclosure	IP65	
Operating environment	Indoors	
B <sub>10D</sub> (MTTFd calculation)	10,000,000 cycles	

### Internal Pilot Type

#### ⚠ Caution

Even when the inlet pressure is within the operating pressure range, restricted piping, etc., may cause reduced flow on the inlet side, leading to the valve not operating properly. Refer to Installation in the Specific Product Precautions for details.

### Piping for External Pilot Type


#### ⚠ Caution

The product may not operate when the external pilot pressure is insufficient due to simultaneous operation or restricted air piping. In this case, use the check valve (AKH series) with the external pilot port, change the piping size or adjust the set pressure to provide a constant pressure of 0.25 MPa or more.

## Flow-rate Characteristics / Weight

Model	Flow-rate characteristics						Weight [g]	
	1→2 (P→A)			2→3 (A→R)			M	S1
	C [dm <sup>3</sup> /(s·bar)]	b	Cv	C [dm <sup>3</sup> /(s·bar)]	b	Cv		
VP542-X536	8.9	0.16	2.2	8.9	0.20	2.1	330	350
VP544-X536	8.8	0.07	2.0	8.8	0.13	2.0	460	480
VP742-X536	15.1	0.21	3.6	15.3	0.22	3.7	570	590
VP744-X536	14.7	0.05	3.3	15.0	0.17	3.4	790	810
VP544-X538	6.5	0.08	1.3	6.7	0.10	1.3	920	960
VP744-X538	10.3	0.08	2.3	9.7	0.08	2.1	1520	1560
VP544-X555	5.2	0.06	1.1	6.7	0.10	1.3	1300	1340
VP744-X555	9.8	0.08	2.1	9.7	0.08	2.1	2180	2220

## Needle Valve / Flow-rate Characteristics (VP544/744-X555)

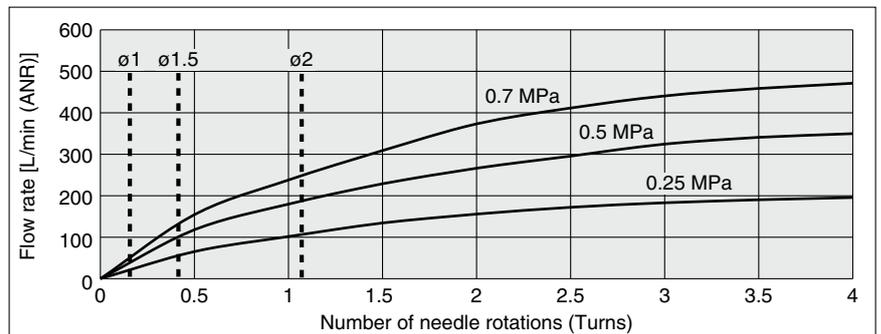

## Solenoid Specifications

Electrical entry	DIN terminal
Rated voltage	24 VDC
Allowable voltage fluctuation	±10%
Power consumption	0.45 W
Surge voltage suppressor	Varistor
Indicator	LED

## Safety Limit Switch Specifications


Manufacturer	OMRON	Rockwell Automation
Electrical wiring	G1/2, M12 connector	M12 connector
Contact resistance	25 mΩ or less	50 mΩ or less
Min. applicable load	5 VDC, 1 mA (Load resistance)	5 VDC, 5 mA (Load resistance)
Max. voltage	24 VDC	
Max. load current	50 mA	
Max. load inductance	0.5 H	
Insulation voltage	300 V	600 V
Protection against electric shock	Class II (EN 60947-5-1:2004)	

# VP500/700-X536, X538, X555 Optional Accessories

For details on optional accessories, refer to the [Web Catalog](#).

## Piping Adapter: 3/8, 1/2

A piping adapter allows installation/removal of the component without removing the piping and thus makes maintenance easier.

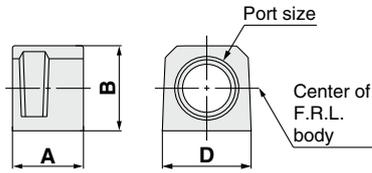


Part no. *1	Port size	A	B	D
E300-□03-A	3/8	31.8	30	30
E400-□04-A	1/2	31.8	36	36

\*1 □ in part numbers indicates a pipe thread type. No indication is necessary for Rc; however, indicate N for NPT, and F for G.

\* Separate interfaces are required for modular unit.

## Spacer with Bracket

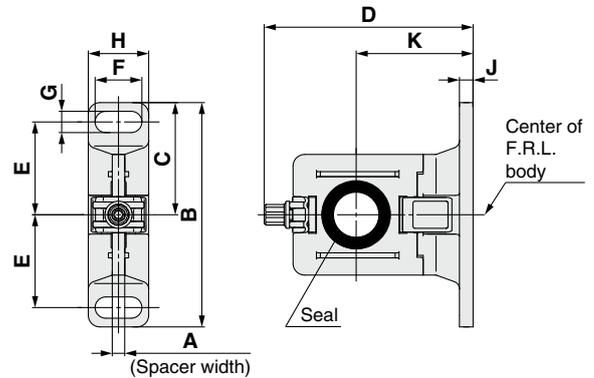

Part no.	A	B	C	D	E	F	G	H	J	K
Y300T-A	4.2	82	41	71.5	35	14	7	19	4	41
Y400T-A	5.2	96	48	86.1	40	18	9	26	5	50

### Ordering Example 1\*1

Dual residual pressure release valve  
VP544-5DZ1-03-X555 ..... 1 pc.


Filter regulator  
AW30-03G-A ..... 1 pc.

Spacer with bracket  
Y300T-A ..... 3 pcs.

Piping adapter  
E300-03-A ..... 2 pcs.

\*1 Products do not come assembled.

Dual residual pressure release valve  
with soft start-up function

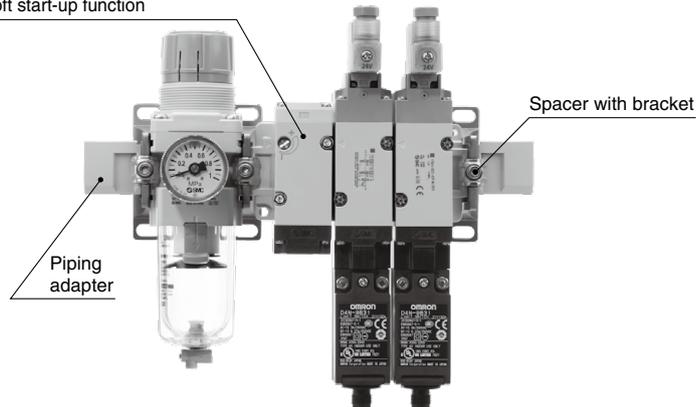

### Ordering Example 2\*1


Residual pressure release valve/  
Base mounted  
VP544R-5DZ1-03M-X536 ... 1 pc.

Filter regulator  
AW30-03G-A ..... 1 pc.

Spacer with bracket  
Y300T-A ..... 3 pcs.

Piping adapter  
E300-03-A ..... 2 pcs.

\*1 Products do not come assembled.

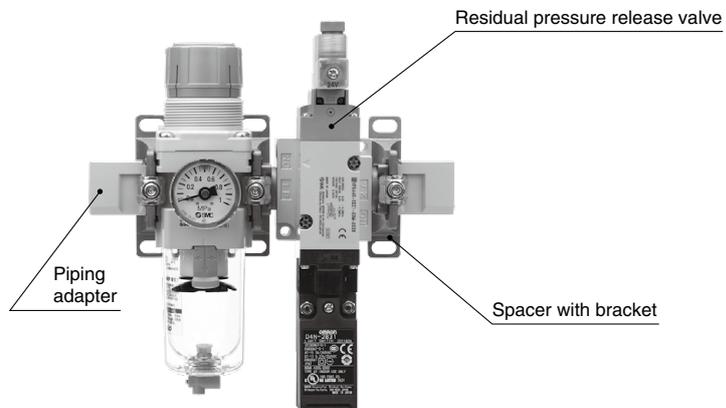

VP500/700

Symbols

X536

X538

X555

Optional  
Accessories

Specific Product  
Precautions

VG342

Symbols

X87

Specific Product  
Precautions



# VP500/700-X536, X538, X555

## Specific Product Precautions

Be sure to read this before handling the products. Refer to the back cover for safety instructions. For 3/4/5-port solenoid valve precautions, refer to the "Handling Precautions for SMC Products" and the "Operation Manual" on the SMC website: <http://www.smcworld.com>

### How to Use DIN Terminal Connector

#### ⚠ Caution Connection

- Loosen the holding screw and pull the connector out of the solenoid valve terminal block.
- After removing the holding screw, insert a flat blade screwdriver, etc., into the notch on the bottom of the terminal block and pry it open, separating the terminal block and the housing.
- Loosen the terminal screws (slotted screws) in the terminal block. Insert the lead core wires into the terminals according to the connection method, and secure the wires by re-tightening the terminal screws.
- Secure the cord by fastening the gland nut.

#### ⚠ Caution

When making connections, please note that using a heavy-duty cord of a size outside of the range of supported sizes ( $\phi 3.5$  to  $\phi 7$ ) will not satisfy IP65 (enclosure) standards. Also, be sure to tighten the gland nut and holding screw within their specified torque ranges.

#### Changing the entry direction

After separating the terminal block and housing, the cord entry direction can be changed by rotating the housing in the desired direction (4 directions at  $90^\circ$  intervals).


\* When equipped with a light, be careful not to damage the light with the cord's lead wires.

#### Precautions

Plug in and pull out the connector vertically without tilting it to one side.

#### Compatible cable

Cord O.D.:  $\phi 3.5$  to  $\phi 7$   
(Reference)  $0.5 \text{ mm}^2$ , 2-core or 3-core, equivalent to JIS C 3306

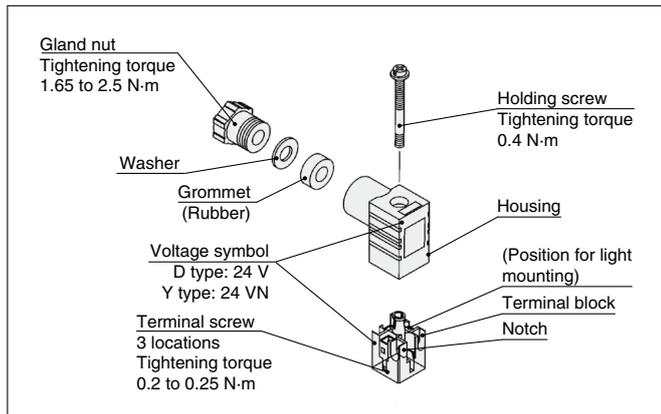

#### "Y" type


The Y type DIN connector is in compliance with the DIN standard of a 8 mm pitch between terminals.

- It is not interchangeable with the D type DIN connector with a 9.4 mm pitch between terminals.
- To distinguish it from the D type DIN connector, "N" is listed at the end of voltage symbol.
- The dimensions are the same as those of the D type DIN connector.

### Light/Surge Voltage Suppressor

#### DIN Terminal

With light (DZ)  
(YZ)

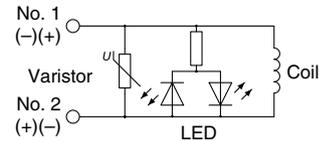

\* The varistor surge voltage suppressor has residual voltage corresponding to the protective element and rated voltage; therefore, protect the controller side from the surge voltage.

### Limit Switch Cable

An OMRON or Rockwell Automation M12 connector limit switch cable is available.

M12 Connector Cable (4 Pins) Made by OMRON

Part number	Cable length [mm]
ZS-37-L	300
ZS-37-M	500
ZS-37-N	1000
ZS-37-P	2000
ZS-37-C	5000

M12 Connector Cable (6 Pins) Made by Rockwell Automation

Part number	Cable length [mm]
VP500-231-1	2000

Rockwell Automation part number: 889R-F6ECA-2

• We recommend using one of the straight type M12 connector cables shown above. If the L type is used, the cable entry direction will not be fixed.

### Installation

- Use the external pilot type when using the VP500/700-X536 or X538 with the AV series. Install the AV series on the primary side.
- For the VP500/700-X536 and X538 internal pilot type, even when the inlet pressure is within the operating pressure range, restricted piping, etc., may cause reduced flow on the inlet side, leading to the valve not operating properly.
  - The recommended piping size is  $3/8"$  for the VP500 and  $1/2"$  for the VP700. Also, use piping with an I.D. of 10 mm or larger for the VP500, and 13 mm or larger for the VP700.
  - When selecting a regulator or a filter regulator, use piping larger than the recommended size with sufficient flow rate characteristics.
  - For extended piping between the regulator and the valve (inlet piping), keep piping as short as possible (1 m or less).
  - For use under conditions other than those listed above, please use the external pilot type.
- When using an external pilot for the VP500/700-X536 or X538, supply pressure to the external pilot via piping from a separate, stable line. Also, if the external pilot pressure is to be branched off from the same piping, in order to prevent the negative effects a pressure drop in the main piping can have on the pilot air piping, be sure to take measures such as installing a check valve on the pilot air piping after branching off, etc.

# 3-Port Solenoid Valve/ Residual Pressure Release Valve with Detection of Main Valve Position VG342-X87



## How to Order

### Dual Residual Pressure Release Valve



VG342 **1** **2** **3** **4** **5** **6** **7** - X87

#### 1 Pilot

Nil	Internal pilot
R	External pilot

\* Refer to Installation on page 30 before selecting the internal pilot type.

#### 2 Voltage

5	24 VDC
---	--------

#### 3 Electrical entry

DZ	DIN terminal, With light/surge voltage suppressor
----	---

#### 4 Port size

06	3/4
10	1

#### 5 Thread

Nil	Rc
F	G
N	NPT

#### 6 Safety limit switch/Wiring

M	M12 connector (Made by OMRON)
S1	M12 connector (Made by Rockwell Automation)

#### 7 With check valve (Only external pilot)

Symbol	Check valve	Applicable tube O.D.	Thread		
			Rc	G	NPT
Nil	None	—	●	●	●
A	Yes	ø8	●	—	—
B		ø5/16"	—	—	●

\* A check valve is installed on the external pilot port.  
\* Refer to Piping for External Pilot Type on page 24 for selection of the check valve.


## Made to Order

### 1 Series Compatible with Secondary Batteries

For details on 25A-, refer to the **Web Catalog** "Series Compatible with Secondary Batteries/25A- Series."

#### How to Order

25A-VG342 **1** **2** **3** **4** **5** **6** **7** - X87

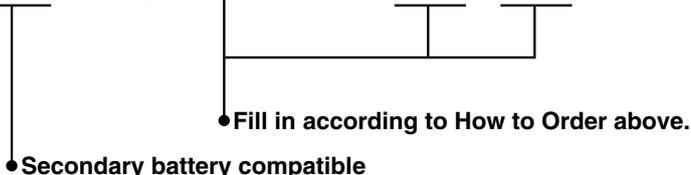

\* Electrical entry can be selected only for D type. Check valve type is available only when the thread type is Rc.



## Valve Specifications

Fluid	Air	
Type of actuation	N.C. (Spring return)	
Operation	Internal pilot	External pilot
Operating pressure range	0.25 to 0.7 MPa	0.25 to 0.7 MPa
External pilot pressure	—	0.25 to 0.7 MPa (Same as operating pressure)
Maximum operating frequency	30 cycles/minute	
Minimum operating frequency	1 cycle/week	
Operating and ambient temperatures	-10 to 50°C (No freezing)	
Ambient humidity	95% RH or less (No condensation)	
Manual override	None	
Pilot exhaust	Individual exhaust	
Lubrication	Not required	
Mounting orientation	Unrestricted	
Impact/Vibration resistance	150/50 m/s <sup>2</sup>	
Enclosure	IP40	
Operating environment	Indoors	
Weight	2.8 kg (1" type: 3.2 kg)	2.9 kg (1" type: 3.3 kg)
B <sub>10D</sub> (MTTF <sub>d</sub> calculation)	1,000,000 cycles	

### Internal Pilot Type

#### ⚠ Caution

Even when the inlet pressure is within the operating pressure range, restricted piping, etc., may cause reduced flow on the inlet side, leading to the valve not operating properly. Refer to Installation in the Specific Product Precautions for details.

### Piping for External Pilot Type

#### ⚠ Caution

The product may not operate when the external pilot pressure is insufficient due to simultaneous operation or restricted air piping. In this case, use the check valve (AKH series) with the external pilot port, change the piping size or adjust the set pressure to provide a constant pressure of 0.25 MPa or more.

## Flow-rate Characteristics

Model	Flow-rate characteristics					
	1→2 (P→A)			2→3 (A→R)		
	C [dm <sup>3</sup> /(s·bar)]	b	Cv	C [dm <sup>3</sup> /(s·bar)]	b	Cv
VG342-06-X87	26.6	0.04	5.5	28.6	0.03	5.6
VG342-10-X87	25.5	0.03	5.4	27.4	0.01	5.3

## Solenoid Specifications

Electrical entry	DIN terminal
Rated voltage	24 VDC
Allowable voltage fluctuation	-15% to +10% of the rated voltage
Power consumption	2.2 W
Suppressor	Diode
Indicator	LED

## Safety Limit Switch Specifications

Manufacturer	OMRON	Rockwell Automation
Electrical wiring	M12 connector	
Contact resistance	25 mΩ or less	50 mΩ or less
Min. applicable load	5 VDC, 1 mA (Load resistance)	5 VDC, 5 mA (Load resistance)
Max. voltage	24 VDC	
Max. load current	50 mA	
Max. load inductance	0.5 H	
Insulation voltage	300 V	600 V
Protection against electric shock	Class II (EN 60947-5-1:2004)	

VP500/700

Symbols

X536

X538

X555

Optional Accessories

Specific Product Precautions

VG342

Symbols

X87


Specific Product Precautions

# VG342-X87

## Symbols

Safety limit switch  
Made by  
OMRON

### Symbol




### Pin Numbers (Built-in switch 2 N.C.)


M12 connector pin number	Wiring specification
①	
②	
③	
④	

## VG342(R)-X87


### Internal pilot

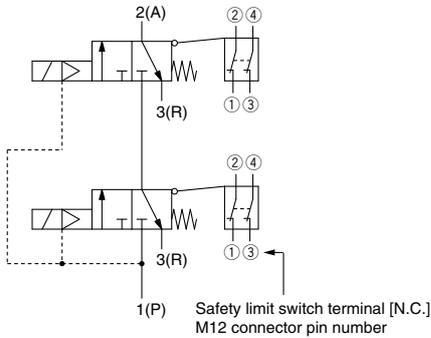

### External pilot

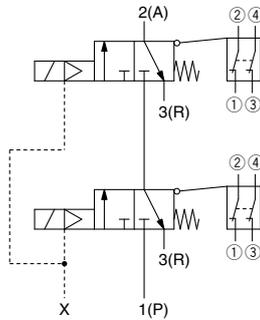


### External pilot/With check valve

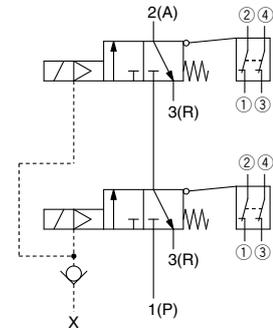

Safety limit switch  
Made by  
Rockwell Automation

### Symbol




### Pin Numbers (Built-in switch 3 N.C.)


M12 connector pin number	Wiring specification
①	
⑤	
②	
⑥	
③	
④	

## VG342(R)-X87

### Internal pilot

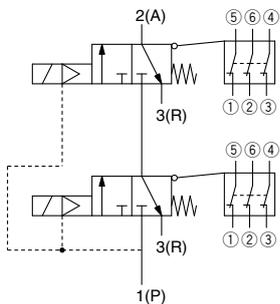

### External pilot

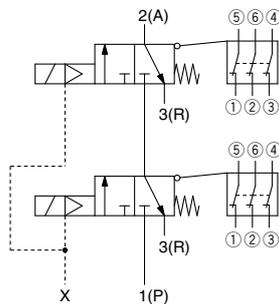

### External pilot/With check valve

