

WALWORTH INDUSTRIAL BRONZE RS GATE VALVE CLASS 125 (200 WOG)


DESIGN FEATURES

- Design in accordance with MSS SP-80
- · Rising Stem
- · Bronze construction
- · Integral seat rings
- · Screwed bonnet design
- Threaded ends as per ANSI B1.20.1
- Face to face dimensions as per WALWORTH design
- · Handwheel operated

| CATALOG FIGURE NO. | TYPE OF ENDS | |
|--------------------|---------------|--|
| W55 | Threaded Ends | |

REGULAR BILL OF MATERIALS

| NO. | DESCRIPTION | MATERIALS | | |
|-----|---------------|-------------------|--|--|
| 1 | Body | Bronze B62 | | |
| 2 | Bonnet | Bronze B62 | | |
| 3 | Disc | Bronze B62 | | |
| 4 | Stem Packing | Non Asbestus | | |
| 5 | Gland | Brass B16 | | |
| 6 | Packing Nut | Bronze B62 | | |
| 7 | Stem | Bronze B62 | | |
| 8 | Handwheel | Ductile Iron A536 | | |
| 9 | Handwheel nut | Galvanized Steel | | |

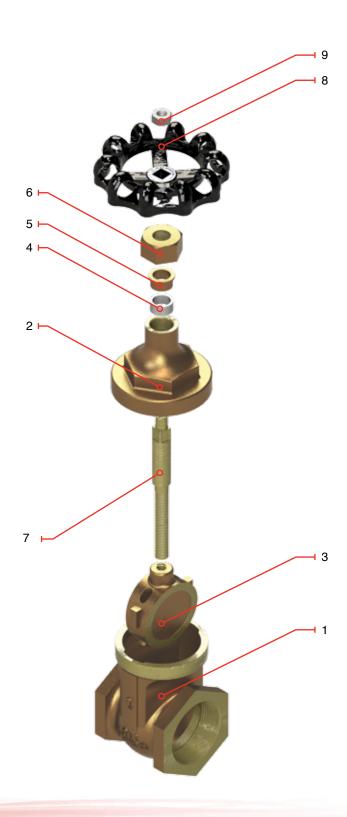




WALWORTH INDUSTRIAL BRONZE RS GATE VALVE CLASS 125 (200 WOG)

DESIGN FEATURES

- · Design in accordance with MSS SP-80
- · Rising Stem
- · Bronze construction
- · Integral seat rings
- · Screwed bonnet design
- · Threaded ends as per ANSI B1.20.1
- Face to face dimensions as per WALWORTH design
- · Handwheel operated

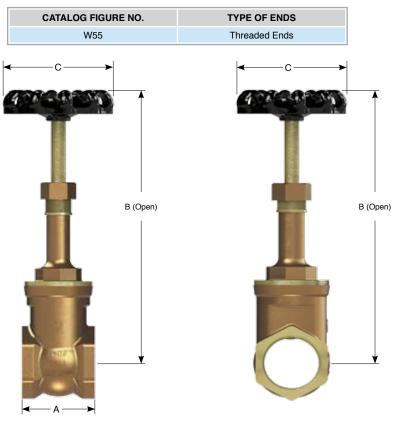



DIMENSIONS AND WEIGHTS

| D NOMINAL DIAMETER | mm | 13 | 19 | 25 | 30 | 40 | 50 |
|--------------------------|------------------|--------|--------|--------|--------|--------|--------|
| | in | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" |
| А | mm | 48 | 51.81 | 59.18 | 64 | 68.07 | 73.66 |
| | in | 1.89 | 2.04 | 2.33 | 2.52 | 2.68 | 2.9 |
| В | mm | 118.11 | 140.97 | 169.67 | 200.02 | 226.06 | 276.86 |
| | in | 4.65 | 5.55 | 6.68 | 7.87 | 8.9 | 10.9 |
| С | mm | 47.75 | 57.15 | 66.54 | 76.2 | 82.55 | 91.94 |
| | in | 1.88 | 2.25 | 2.62 | 3 | 3.25 | 3.62 |
| Weight W55 | kg | 0.38 | 0.60 | 0.82 | 1.14 | 1.46 | 2.50 |
| | lb | 0.83 | 1.32 | 1.80 | 2.5 | 3.21 | 5.5 |
| Cv | Flow coefficient | 16.08 | 37.6 | 69.7 | 111.36 | 164.13 | 306.76 |