
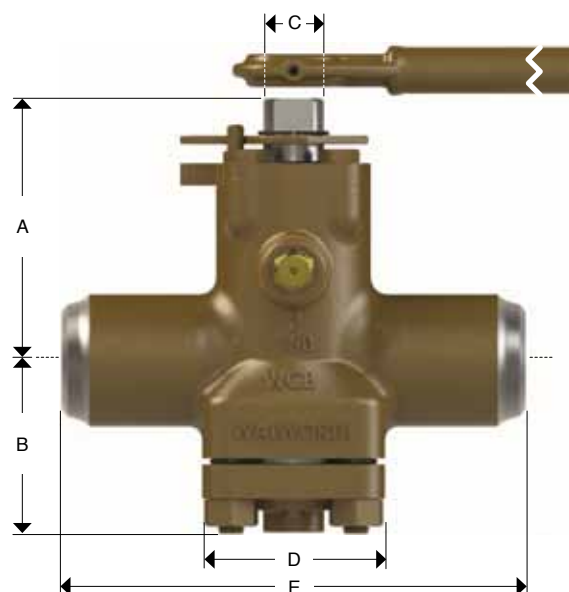


COMPENSATOR PLUG VALVE SHORT PATTERN CLASS 150 (WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
1412	Wrench	RF
1414	Wrench	WE

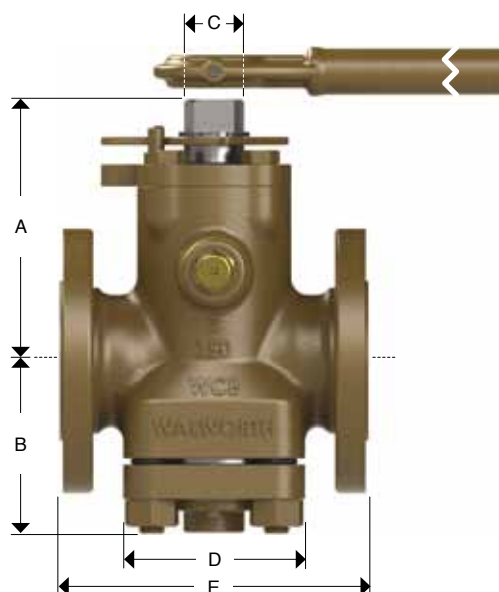

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight				Wrench No.
										E						RF/RTJ		WE		
		A		B		C		D		RF		RTJ		WE						
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	
2	50	5.9	150	3.78	96	1.37	35	4.125	105	7	178	7.5	191	10.5	267	16	35	-	-	IB-2
3	76	6.84	174	4.53	115	1.37	35	4.62	117	8	203	8.5	216	13	330	30	66	-	-	IB-2
4	100	7.37	187	5.05	128	1.37	35	5.25	133	9	229	9.5	241	14	356	35	77	31	68	IB-2
6	150	9.51	242	6.25	159	1.99	51	8.12	206	10.5	267	11	279	18	457	64	141	45	99	IB-3
8	200	11.75	298	9	229	1.99	51	9.75	248	11.5	292	12	305	20.5	521	89	196	70	154	IB-3

Note: The same range of valves is available with Flanged by Butt-weld end (RF x WE) with the figure: 1415