
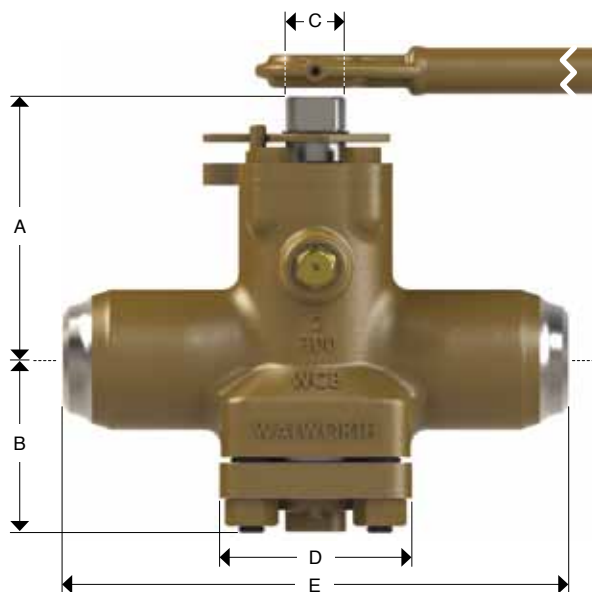


COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 300 (WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Design as per API 6D
- Fire Test as per API 6FA

Figure no.	Operation	Type of ends
3512	Wrench	RF
3513	Wrench	RTJ
3514	Wrench	WE

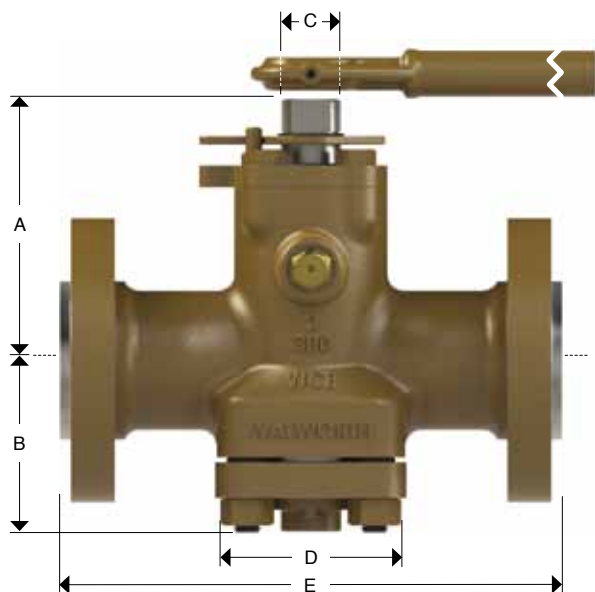

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions						Approx Weight				Wrench No.
										E						RF/RTJ		WE		
		A		B		C		D		RF		RTJ		WE						
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	
2	50	4.5	114	3.78	96	1.37	35	4.37	111	-	-	-	-	-	-	26	57	21	46	IB-2
3	76	6.84	174	4.41	112	1.37	35	4.62	117	-	-	-	-	-	-	46	101	38	84	IB-2
4	100	7.37	187	5.05	128	1.37	35	5.25	133	-	-	-	-	-	-	54	119	45	99	IB-2
6	150	9.51	242	6.38	162	1.99	51	8.12	206	15.87	403	16.5	419	-	-	119	262	99	218	IB-3
8	200	11.72	298	9.19	233	1.99	51	9.75	248	19.75	502	20.37	518	-	-	195	429	162	356	IB-3

Note: The same range of valves is available with Flanged by Butt-weld end (RF x WE) with the figure 3515