


WALWORTH FIRE SAFE FLOATING BALL VALVES **CLASS 2500 (THREADED OR SOCKET WELD ENDS)**

- Design in accordance with ASME 16.34
- CLASS 2500 as per ASME B16.34
- Full Port
- Three-pieces body
- Fire safe design as per API 607
- Forged Steel Construction
- Bolted Body
- Threaded ends as per ASME B1.20.1
- End to end dimensions as per WALWORTH standard
- Socket Weld ends as per ASME B16.11

Lever Operator	
Catalog Figure No.	Type of Ends
7211-Z	Threaded (S)
7217-Z	Socket Weld (SW)
7210-Z	Threaded X Socket Weld (SSW)

Lever Operator (Reduced Port)	
Catalog Figure No.	Type of Ends
7211-RZ	Threaded (S)
7217-RZ	Socket Weld (SW)
7210-RZ	Threaded X Socket Weld (SSW)

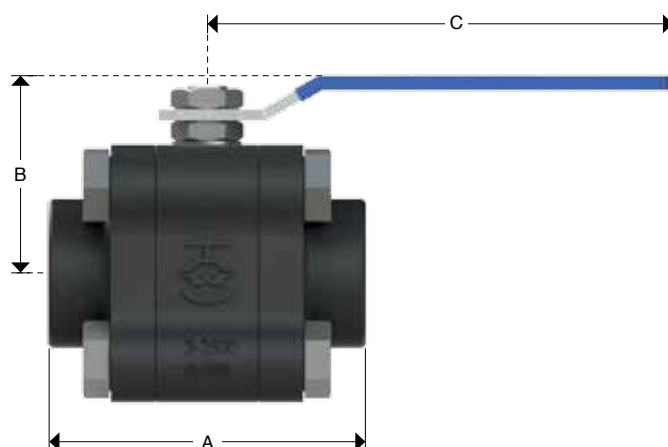

Dimensions and Weights

D Nominal Diameter	mm	15	20	25	40
	in	1/2	3/4	1	1 1/2
A	mm	170	190	205	260
	in	6 2/3	7 1/2	8	10 1/4
B	mm	62	75	80	111
	in	2 4/9	3	3 1/7	4 3/8
C	mm	220	250	250	400
	in	8 2/3	9 5/6	9 5/6	15 3/4
Weight 7211-Z	kg	2.8	4.5	7	15
	lb	6.17	9.92	15.44	33.08