




PRESSURE SEAL FLEXIBLE WEDGE GATE VALVES CARBON, ALLOY OR STAINLESS STEEL

ASME CLASSES 600–2500, 2 –24" (50–600 mm)
ASME CLASS 4500, 2 –8" (50–200 mm)

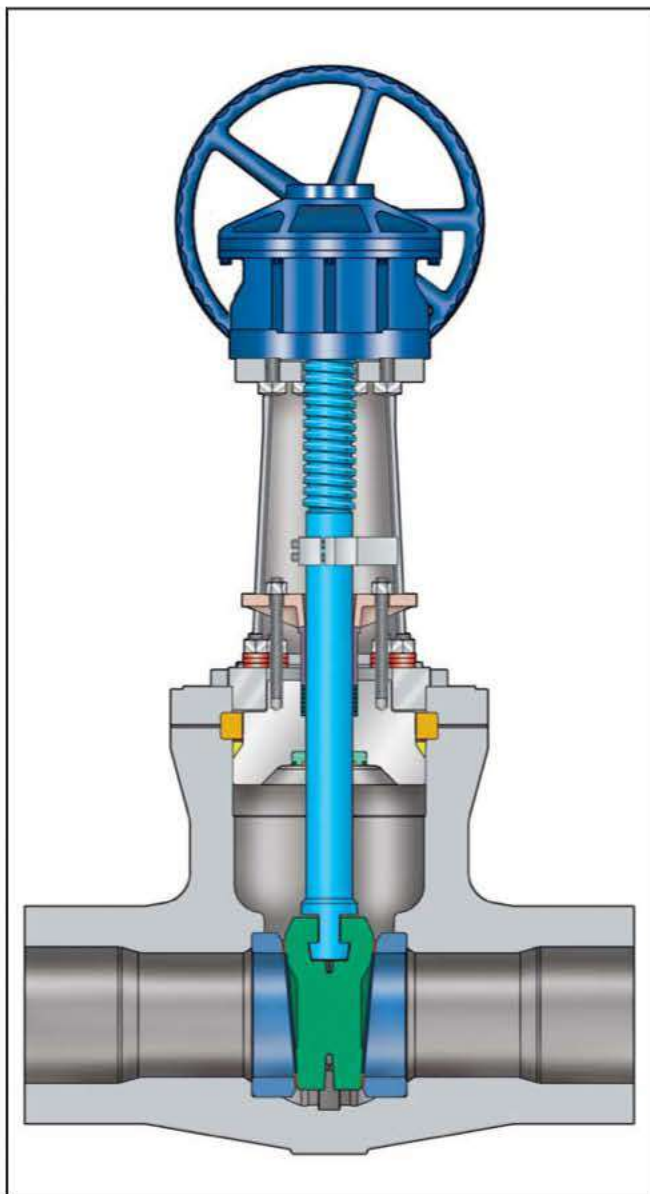


Velan pressure seal flexible wedge gate valves are ideal for high pressure steam (main steam isolation), liquid (feedwater isolation), catalytic reformers, hydrocrackers and other tough services.

DESIGN FEATURES:

- **Velan pressure seal design.**
(See page 10 for details.)
- **Velan flexible wedge offers** superior tightness of seats and freedom from sticking.
- **Wedge guiding** minimizes seat rubbing and scuffing resulting in long cycle life.
- **Designed to ASME B16.34.**
- **Body** made of superior strength forgings and optional cast steel.
- **Velan stem seal** offers tight seal with little to no maintenance over long periods of time.
- **Optional** live-loading of packing.
- **Non-rotating** stem.
- **Hardfaced** seating faces resist erosion.
- Other sizes and pressure classes available. Contact the company for specifications.

CLASS	FIGURE NUMBER	
	FORGED	CAST
600	2054P	2064K
900	7054P	7064K/7054K
1500	3054P	3064K/3054K
2500	4054P	4054K
4500	5054P	—



Flange dimensions are in accordance with ASME B16.5.
Flanges are welded on.