




Forged Steel OS&Y – Conventional Port
Valves comply with applicable portions of API 602 and ASME B16.34

Class 800
1/4" - 2"

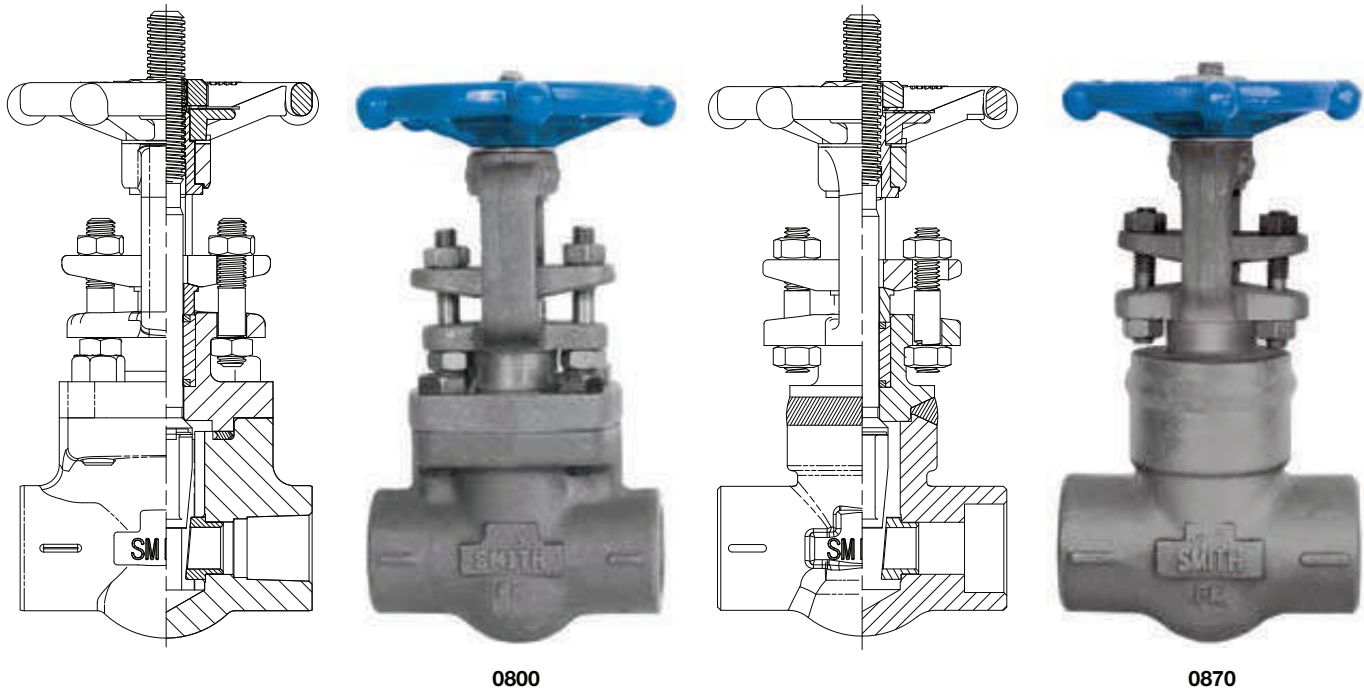

CLASS 800 CONVENTIONAL PORT BOLTED BONNET GATE VALVE - THREADED or SOCKET WELD - INCHES (MM)								
VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	SOCKET DEPTH	SOCKET DIAMETER	NPT THRD	APPROX. WEIGHT LBS (KG)
1/4 (8)	3.25 (83)	6.31 (160)	4.00 (102)	0.31 (8)	0.39 (10)	0.56 (14)	1/4"-18	3.8 (1.7)
3/8 (10)	3.25 (83)	6.31 (160)	4.00 (102)	0.39 (10)	0.39 (10)	0.69 (18)	3/8"-18	3.8 (1.7)
1/2 (15)	3.25 (83)	6.31 (160)	4.00 (102)	0.39 (10)	0.39 (10)	0.86 (22)	1/2"-14	3.8 (1.7)
3/4 (20)	3.50 (89)	6.50 (165)	4.00 (102)	0.50 (13)	0.51 (13)	1.07 (27)	3/4"-14	4.5 (2.0)
1 (25)	3.88 (98)	7.25 (184)	4.00 (102)	0.75 (19)	0.51 (13)	1.34 (34)	1"-11 1/2	6.3 (2.8)
1 1/4 (32)	4.75 (121)	9.13 (232)	5.50 (140)	1.19 (30)	0.51 (13)	1.68 (43)	1 1/4"-11 1/2	9.5 (4.3)
1 1/2 (40)	4.75 (121)	9.13 (232)	5.50 (140)	1.19 (30)	0.51 (13)	1.92 (49)	1 1/2"-11 1/2	12.0 (5.4)
2 (50)	5.50 (140)	11.06 (281)	6.63 (168)	1.50 (38)	0.63 (16)	2.41 (61)	2"-11 1/2	20.5 (9.3)

CLASS 800 CONVENTIONAL PORT WELDED BONNET GATE VALVE - THREADED or SOCKET WELD - INCHES (MM)								
VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	SOCKET DEPTH	SOCKET DIAMETER	NPT THRD	APPROX. WEIGHT LBS (KG)
1/4 (8)	3.25 (83)	6.19 (157)	4.00 (102)	0.31 (8)	0.39 (10)	0.56 (14)	1/4"-18	3.3 (1.5)
3/8 (10)	3.25 (83)	6.25 (159)	4.00 (102)	0.39 (10)	0.39 (10)	0.69 (18)	3/8"-18	3.3 (1.5)
1/2 (15)	3.25 (83)	6.25 (159)	4.00 (102)	0.39 (10)	0.39 (10)	0.86 (22)	1/2"-14	3.3 (1.5)
3/4 (20)	3.50 (89)	6.50 (165)	4.00 (102)	0.50 (13)	0.51 (13)	1.07 (27)	3/4"-14	3.8 (1.7)
1 (25)	3.88 (98)	7.25 (184)	4.00 (102)	0.75 (19)	0.51 (13)	1.34 (34)	1"-11 1/2	5.3 (2.4)
1 1/4 (32)	4.75 (121)	9.13 (232)	5.50 (140)	1.19 (30)	0.51 (13)	1.68 (43)	1 1/4"-11 1/2	10.3 (4.6)
1 1/2 (40)	4.75 (121)	9.13 (232)	5.50 (140)	1.19 (30)	0.51 (13)	1.92 (49)	1 1/2"-11 1/2	9.8 (4.4)
2 (50)	5.50 (140)	11.00 (279)	6.63 (168)	1.50 (38)	0.63 (16)	2.41 (61)	2"-11 1/2	16.0 (7.3)