





0811-0814/0876-0879 Gate Valves

Forged Steel OS&Y Male End – Conventional Port
Valves comply with applicable portions of API 602 and ASME B16.34


Class 800
1/2" - 2"

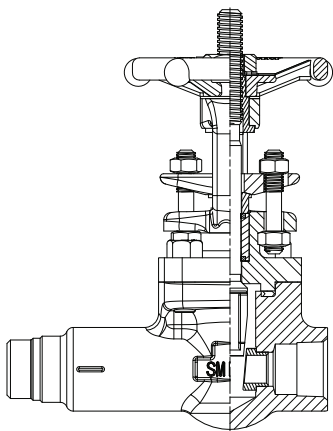

0811 Male Thread x Female Thread
0812 Male Plain x Female Thread
0813 Male Thread x Female S/W
0814 Male Plain x Female S/W

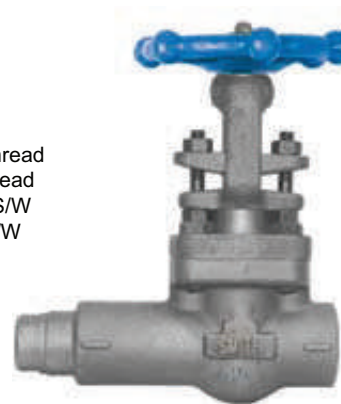

0811-0814

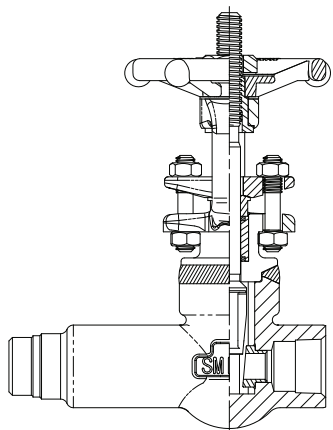

0876 Male Thread x Female Thread
0877 Male Plain x Female Thread
0878 Male Thread x Female S/W
0879 Male Plain x Female S/W



0876-0879

CLASS 800 CONVENTIONAL PORT BOLTED BONNET GATE TAKE OFF DESIGN - INCHES (MM)

VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	CENTER TO END	APPROX. WEIGHT LBS (KG)
1/2 (15)	5.63 (143)	6.25 (159)	4.00 (102)	0.31 (8)	4.00 (102)	4.3 (1.9)
3/4 (20)	5.75 (146)	6.50 (165)	4.00 (102)	0.50 (13)	4.00 (102)	5.0 (2.3)
1 (25)	5.94 (151)	7.25 (184)	4.00 (102)	0.66 (17)	4.00 (102)	6.8 (3.1)
1 1/2 (40)	7.38 (187)	9.13 (232)	5.50 (140)	1.19 (30)	5.00 (127)	10.2 (4.6)
2 (50)	7.88 (200)	11.06 (281)	6.63 (168)	1.50 (38)	5.13 (130)	12.8 (5.8)

CLASS 800 CONVENTIONAL PORT WELDED BONNET GATE TAKE OFF DESIGN - INCHES (MM)

VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	CENTER TO END	APPROX. WEIGHT LBS (KG)
1/2 (15)	5.63 (143)	6.19 (157)	4.00 (102)	0.31 (8)	4.00 (102)	3.8 (1.7)
3/4 (20)	5.75 (146)	6.44 (164)	4.00 (102)	0.50 (13)	4.00 (102)	4.2 (1.9)
1 (25)	5.94 (151)	7.19 (183)	4.00 (102)	0.66 (17)	4.00 (102)	5.8 (2.6)
1 1/2 (40)	7.38 (187)	9.13 (232)	5.50 (140)	1.19 (30)	5.00 (127)	10.5 (4.8)
2 (50)	7.88 (200)	11.00 (279)	6.63 (168)	1.50 (38)	5.13 (130)	17.0 (7.7)