





0850-0890 Gate Valves

Forged Steel, Inside Screw – Conventional Port
Valves comply with applicable portions of API 602 and ASME B16.34

Class 800
1/4" - 2"

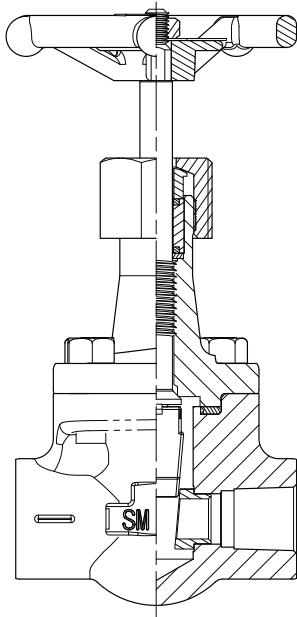

0850

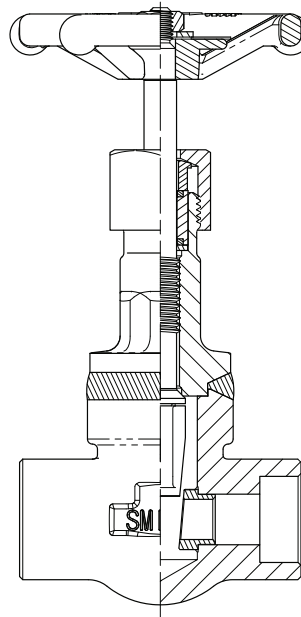

0890

CLASS 800 INSIDE SCREW RISING STEM BOLTED BONNET GATE VALVE - THREADED or SOCKET WELD - INCHES (MM)

VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	SOCKET DEPTH	SOCKET DIAMETER	NPT THRD	APPROX. WEIGHT LBS (KG)
1/4 (8)	3.25 (83)	6.13 (156)	4.00 (102)	0.31 (8)	0.39 (10)	0.56 (14)	1/4"-18	3.5 (1.6)
3/8 (10)	3.25 (83)	6.19 (157)	4.00 (102)	0.39 (10)	0.39 (10)	0.69 (18)	3/8"-18	3.5 (1.6)
1/2 (15)	3.25 (83)	6.19 (157)	4.00 (102)	0.39 (10)	0.39 (10)	0.86 (22)	1/2"-14	3.5 (1.6)
3/4 (20)	3.50 (89)	6.38 (162)	4.00 (102)	0.50 (13)	0.51 (13)	1.07 (27)	3/4"-14	4.3 (1.9)
1 (25)	3.88 (98)	7.75 (197)	4.63 (117)	0.75 (19)	0.51 (13)	1.34 (34)	1"-11 1/2	6.0 (2.7)
1 1/4 (32)	4.75 (121)	10.25 (260)	4.63 (117)	1.19 (30)	0.51 (13)	1.68 (43)	1 1/4"-11 1/2	12.3 (5.6)
1 1/2 (40)	4.75 (121)	10.25 (260)	5.50 (140)	1.19 (30)	0.51 (13)	1.92 (49)	1 1/2"-11 1/2	11.8 (5.3)
2 (50)	5.50 (140)	11.75 (298)	5.50 (140)	1.50 (38)	0.63 (16)	2.41 (61)	2"-11 1/2	19.0 (8.6)

CLASS 800 INSIDE SCREW RISING STEM WELDED BONNET GATE VALVE - THREADED or SOCKET WELD - INCHES (MM)

VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	SOCKET DEPTH	SOCKET DIAMETER	NPT THRD	APPROX. WEIGHT LBS (KG)
1/4 (8)	3.25 (83)	6.13 (156)	4.00 (102)	0.31 (8)	0.39 (10)	0.56 (14)	1/4"-18	3.3 (1.5)
3/8 (10)	3.25 (83)	6.13 (156)	4.00 (102)	0.39 (10)	0.39 (10)	0.69 (18)	3/8"-18	3.0 (1.4)
1/2 (15)	3.25 (83)	6.19 (157)	4.00 (102)	0.39 (10)	0.39 (10)	0.86 (22)	1/2"-14	3.0 (1.4)
3/4 (20)	3.50 (89)	6.19 (157)	4.00 (102)	0.50 (13)	0.51 (13)	1.07 (27)	3/4"-14	3.8 (1.7)
1 (25)	3.88 (98)	7.75 (197)	4.63 (117)	0.75 (19)	0.51 (13)	1.34 (34)	1"-11 1/2	5.5 (2.5)
1 1/4 (32)	4.75 (121)	10.25 (260)	4.63 (117)	1.19 (30)	0.51 (13)	1.68 (43)	1 1/4"-11 1/2	10.3 (4.6)
1 1/2 (40)	4.75 (121)	10.25 (260)	5.50 (140)	1.19 (30)	0.51 (13)	1.92 (49)	1 1/2"-11 1/2	9.8 (4.4)
2 (50)	5.50 (140)	11.75 (298)	5.50 (140)	1.50 (38)	0.63 (16)	2.41 (61)	2"-11 1/2	15.3 (6.9)