




# Y167-Y267 Y-Pattern Globe Valves

**Forged Steel OS&Y**  
Valves comply with applicable portions of API 602 and ASME B16.34  
**Rotating Stem**

**Class 1690/2690**  
**1/2" - 2"**

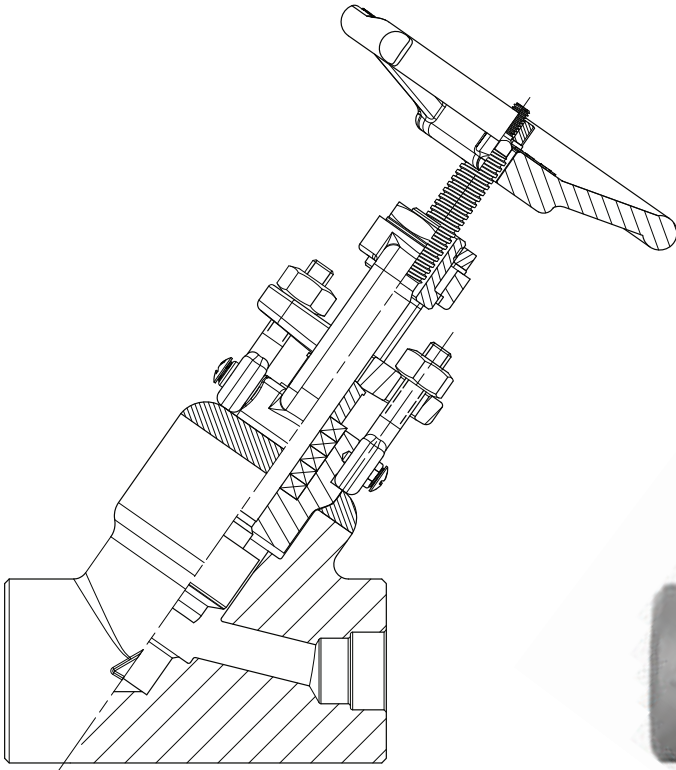

Y167-Y267

CLASS 1690 WELDED BONNET Y-PATTERN GLOBE VALVE - THREADED or SOCKET WELD - INCHES (MM)								
VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	SOCKET DEPTH	SOCKET DIAMETER	NPT THRD	APPROX. WEIGHT LBS (KG)
1/2 (15)	4.13 (105)	8.50 (216)	3.94 (100)	0.47 (12)	0.39 (10)	0.86 (22)	1/2"-14	7.7 (3.5)
3/4 (20)	4.75 (121)	10.00 (254)	5.50 (140)	0.56 (14)	0.51 (13)	1.07 (27)	3/4"-14	12.1 (5.5)
1 (25)	6.50 (165)	11.00 (279)	5.50 (140)	0.75 (19)	0.51 (13)	1.34 (34)	1"-11 1/2	24.3 (11.0)
1 1/2 (40)	7.50 (191)	14.94 (379)	6.88 (175)	1.25 (32)	0.51 (13)	1.92 (49)	1 1/2"-11 1/2	36.4 (16.5)
2 (50)	8.69 (221)	17.69 (449)	9.25 (235)	1.56 (40)	0.63 (16)	2.41 (61)	2"-11 1/2	57.3 (26.0)

CLASS 2690 WELDED BONNET Y-PATTERN GLOBE VALVE - THREADED or SOCKET WELD - INCHES (MM)								
VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	SOCKET DEPTH	SOCKET DIAMETER	NPT THRD	APPROX. WEIGHT LBS (KG)
1/2 (15)	4.75 (121)	9.44 (240)	5.50 (140)	0.44 (11)	0.39 (10)	0.86 (22)	1/2"-14	11.0 (5.0)
3/4 (20)	6.50 (165)	11.25 (286)	5.50 (140)	0.59 (15)	0.51 (13)	1.07 (27)	3/4"-14	19.8 (9.0)
1 (25)	6.50 (165)	12.19 (310)	5.50 (140)	0.75 (19)	0.51 (13)	1.34 (34)	1"-11 1/2	22.0 (10.0)
1 1/2 (40)	7.50 (191)	14.94 (379)	6.88 (175)	1.13 (29)	0.51 (13)	1.92 (49)	1 1/2"-11 1/2	35.3 (16.0)
2 (50)	8.69 (221)	18.12 (460)	9.25 (235)	1.50 (38)	0.63 (16)	2.41 (61)	2"-11 1/2	55.1 (25.0)