




OG86-G895 Globe Valves

Forged Steel OS&Y
Valves comply with applicable portions of API 602 and ASME B16.34

Class 600/1500
1/2" - 2"

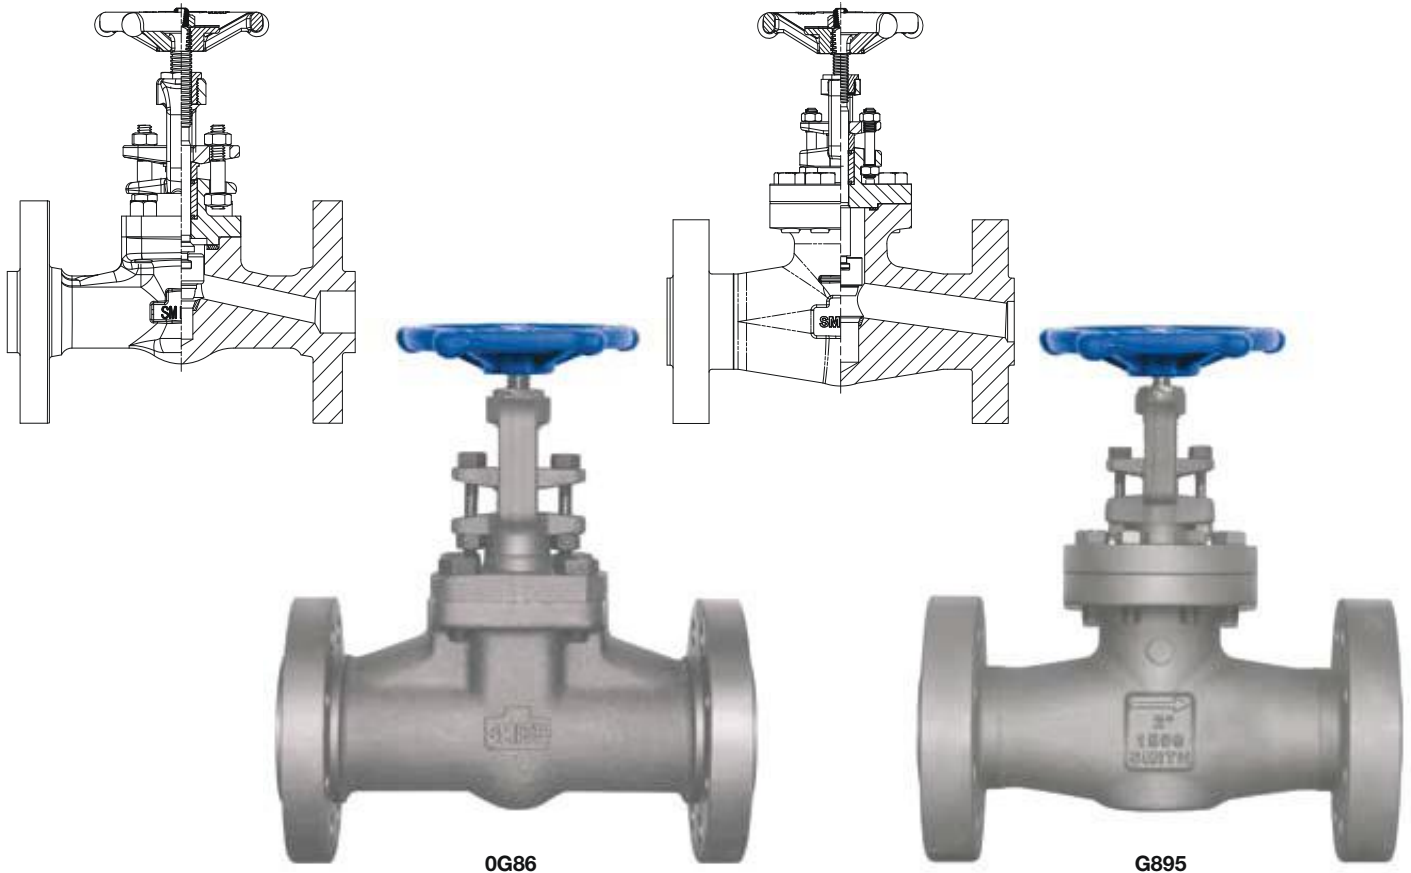

OG86

G895

CLASS 600 BOLTED BONNET GLOBE VALVE - FLANGED ENDS - INCHES (MM)

VALVE SIZE NPS (DIN)	FACE TO FACE	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	FLANGE DIAMETER	RAISED DIAMETER	BOLT HOLE	BOLT HOLE DIAMETER	BOLT CIRCLE	APPROX. WEIGHT LBS (KG)
1/2 (15)	6.50 (165)	6.31 (160)	4.00 (102)	0.38 (10)	3.75 (95)	1.38 (35)	4	0.63 (16)	2.63 (67)	7.8 (3.5)
3/4 (20)	7.50 (191)	6.50 (165)	4.00 (102)	0.50 (13)	4.63 (118)	1.69 (43)	4	0.75 (19)	3.25 (83)	11.8 (5.3)
1 (25)	8.50 (216)	7.19 (183)	4.00 (102)	0.75 (19)	4.94 (125)	2.00 (51)	4	0.75 (19)	3.50 (89)	15.3 (6.9)
1 1/2 (40)	9.50 (241)	8.88 (225)	4.63 (118)	1.19 (30)	6.13 (156)	2.88 (73)	4	0.88 (22)	4.50 (114)	31.8 (14.4)
2 (50)	11.50 (292)	10.63 (270)	6.63 (168)	1.44 (37)	6.50 (165)	3.63 (92)	8	0.75 (19)	5.00 (127)	46.8 (21.2)

CLASS 1500 BOLTED BONNET GLOBE VALVE - FLANGED ENDS - INCHES (MM)

VALVE SIZE NPS (DIN)	FACE TO FACE	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	FLANGE DIAMETER	RAISED DIAMETER	BOLT HOLE	BOLT HOLE DIAMETER	BOLT CIRCLE
1/2 (15)	8.50 (216)	7.98 (203)	4.00 (102)	0.38 (10)	4.75 (121)	1.38 (35)	4	0.88 (22)	3.25 (83)
3/4 (20)	9.00 (229)	8.69 (221)	5.50 (140)	0.50 (13)	5.13 (130)	1.69 (43)	4	0.88 (22)	3.50 (89)
1 (25)	10.00 (254)	10.00 (254)	5.50 (140)	0.75 (19)	5.88 (149)	2.00 (51)	4	1.00 (25)	4.00 (102)
1 1/2 (40)	12.00 (305)	11.89 (302)	6.63 (168)	1.19 (30)	7.00 (178)	2.88 (73)	4	1.13 (29)	4.88 (124)
2 (50)	14.50 (368)	12.98 (330)	6.63 (168)	1.44 (37)	8.50 (216)	3.63 (92)	8	1.00 (25)	6.50 (165)