





CG80-CG87 Cryogenic Globe Valves

Forged Steel OS&Y
Valves comply with applicable portions of API 602 and ASME B16.34

Class 800
1/2" - 2"

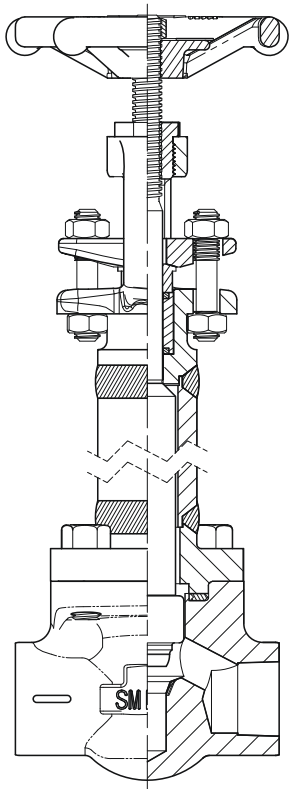

CG80

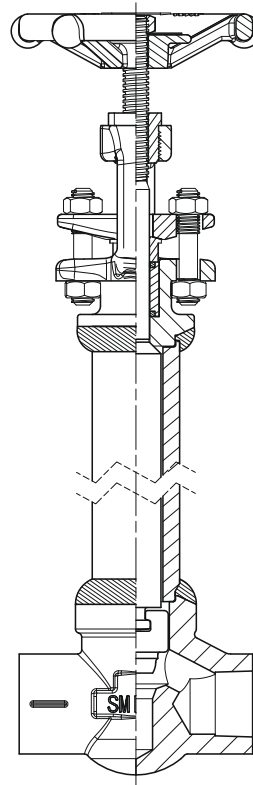

CG87

CLASS 800 BOLTED BONNET CRYOGENIC GLOBE VALVE - THREADED or SOCKET WELD - INCHES (MM)

VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	SOCKET DEPTH	SOCKET DIAMETER	NPT THRD	APPROX.WEIGHT LBS (KG)
1/2 (15)	3.25 (83)	18.31 (465)	4.00 (102)	0.38 (10)	0.39 (10)	0.86 (22)	1/2"-14	8.0 (3.6)
3/4 (20)	3.50 (89)	18.50 (470)	4.00 (102)	0.50 (13)	0.51 (13)	1.07 (27)	3/4"-14	8.9 (4.0)
1 (25)	4.50 (114)	18.75 (476)	4.00 (102)	0.75 (19)	0.51 (13)	1.34 (34)	1"-11 1/2	12.1 (5.5)
1 1/2 (40)	6.25 (159)	20.13 (511)	5.50 (140)	1.19 (30)	0.51 (13)	1.92 (49)	1 1/2"-11 1/2	19.5 (8.8)
2 (50)	7.25 (184)	21.94 (557)	6.63 (168)	1.44 (37)	0.63 (16)	2.41 (61)	2"-11 1/2	32.0 (14.5)

CLASS 800 WELDED BONNET CRYOGENIC GLOBE VALVE - THREADED or SOCKET WELD - INCHES (MM)

VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	SOCKET DEPTH	SOCKET DIAMETER	NPT THRD	APPROX.WEIGHT LBS (KG)
1/2 (15)	3.25 (83)	18.38 (467)	4.00 (102)	0.38 (10)	0.39 (10)	0.86 (22)	1/2"-14	10.9 (4.9)
3/4 (20)	3.50 (89)	18.56 (472)	4.00 (102)	0.50 (13)	0.51 (13)	1.07 (27)	3/4"-14	12.6 (5.7)
1 (25)	4.50 (114)	18.81 (478)	4.00 (102)	0.75 (19)	0.51 (13)	1.34 (34)	1"-11 1/2	16.4 (7.4)
1 1/2 (40)	6.25 (159)	20.06 (510)	5.50 (140)	1.19 (30)	0.51 (13)	1.92 (49)	1 1/2"-11 1/2	24.2 (11.0)
2 (50)	7.25 (184)	22.12 (562)	6.63 (168)	1.44 (37)	0.63 (16)	2.41 (61)	2"-11 1/2	38.3 (17.4)