



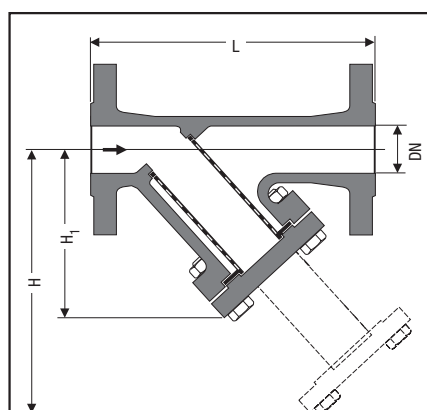

Strainer series
with flanged connections
GSF 11, PN 6, 5.1301
GSF 14, PN 16, 5.1301
GSF 35/36, PN 25/40, GP 240 GH
GSF 46A, PN 16/40, 1.4408
GSF 24, PN 16, 5.3103
GSF 25, PN 25, 5.3103

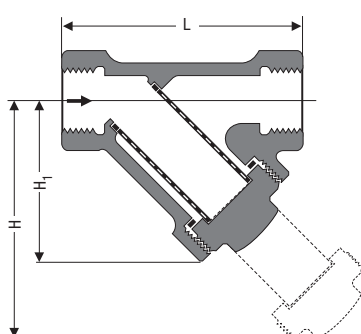

Y-type strainer with
screwed connections series 330
GSF 335, PN 40, CuZn39Pb3

Application

In piping systems upstream of equipment that is sensitive to dirt. For liquids, gases, steam and aggressive fluids.

Dimensions [mm] and Weights [kg] for Y-Type Strainers with Flanged Connections PN 6 - 40

Nominal size		15	20	25	32	40	50	65	80	100	125	150	200	250	300
Overall length	L	130	150	160	180	200	230	290	310	350	400	480	600	730	850
Overall height	GSF 11, 14 H	135	160	180	215	240	250	285	330	395	455	525	650	870	1110
Overall height	GSF 11, 14 H1	90	100	115	135	150	160	180	215	240	280	330	405	540	680
Overall height	GSF 24, 25 H	115	115	135	135	170	190	220	265	340	410	475	580	680	820
Overall height	GSF 24, 25 H1	75	75	90	90	110	120	140	165	220	260	300	360	470	560
Overall height	GSF 35 H												587	718	829
Overall height	GSF 35 H1												380	445	511
Overall height	GSF 36 H	121	121	145	146	200	201	287	292	335	415	485			
Overall height	GSF 36 H1	88	87	100	101	134	135	191	195	224	268	309			
Overall height	GSF 46A H	155	165	180	195	210	225	250	290	340	430	480	590	750	940
Overall height	GSF 46A H1	100	110	120	125	150	165	185	190	200	280	310	390	455	665
Mesh size	GSF 11, 14 mm	1	1	1	1	1	1	1.25	1.25	1.6	1.6	1.6	1.6	1.6	1.6
Mesh size	GSF 24, 25 mm	1.25	1.25	1.25	1.25	1.25	1.25	2	2	2	2	2	2	2	2
Mesh size	GSF 35 mm												2	2	2
Mesh size	GSF 36 mm	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25	2	2	2	2	2
Mesh size	GSF 46A mm	0.5	0.5	0.5	0.5	0.8	0.8	0.8	0.8	0.8	1.0	1.0	1.0	2.1	2.1
Plug	GSF 11, 14 G	3/8	3/8	3/8	3/8	3/8	3/8	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Plug	GSF 24, 25 G	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1	1	1	1	1	1
Plug	GSF 35 G												2	2	2
Plug	GSF 36 G	3/8	3/8	3/8	3/8	1 1/4	1 1/4	1 1/4	1 1/4	1 1/2	1 1/2	1 1/2			
Plug	GSF 46A M	10	10	10	10	12	12	14	14	14	16	16/20 ¹⁾	18	20	22
Weight	GSF 11 kg	2.5	3	4.5	5.5	7	9	13	19	26	38	54	110		
Weight	GSF 14 kg	3	4	5	7	9	12	16	21	30	43	61	121	154	255
Weight	GSF 24 kg	3.5	4	5.5	7	9	12	16	21	28	41	58	121	154	255
Weight	GSF 25 kg	3.5	4	5.5	7	9	12	16	21	32	47	64	133		
Weight	GSF 35 kg												120.6	184.9	269
Weight	GSF 36 kg	3	3.5	4.4	5.8	8.4	11.2	19.4	21.6	32.4	48.2	70			
Weight PN40	GSF 46A kg	5	6	7.5	9	10.5	14	24	28	43	71	99	148	266	499
Weight PN16	GSF 46A kg							20	24	29	53	75	125	239	408

¹⁾ PN 40: M20

Application

In piping systems upstream of equipment that is sensitive to dirt. For liquids, gases, steam and aggressive fluids.

Dimensions [mm] and Weights [kg] of Y-Type Strainers with Screwed Connections

Nominal size		G	3/8	1/2	3/4	1	1 1/4	1 1/2	2
Overall length	GSF 335	L	65	65	75	90	110	120	150
Overall height	GSF 335	H ₁	48	48	56	64	76	84	102
Overall height	GSF 335	H	78	78	95	112	130	140	165
Mesh size			0.5	0.5	0.5	0.5	0.5	0.5	0.5
Weight	GSF 335		0.35	0.35	0.5	0.8	1.2	1.4	2.5