

olivervalves

INSTRUMENT VALVE AND DOUBLE BLOCK & BLEED VALVE SOLUTIONS

reliability
under
pressure




www.valves.co.uk

THREE VALVE MANIFOLDS


Y35 TYPE



Direct mounting flange to flange.



1.5kg

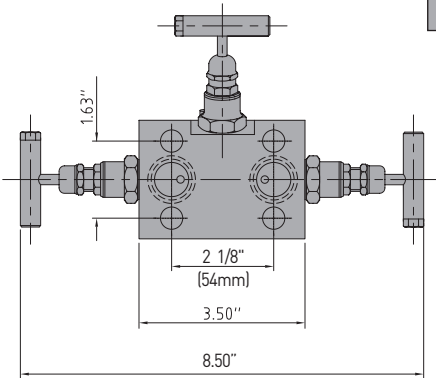


Width 1.25"

Note: Kidney flanges in many styles are optional


T34 TYPE



Direct mounting pipe to flange.




1.5kg

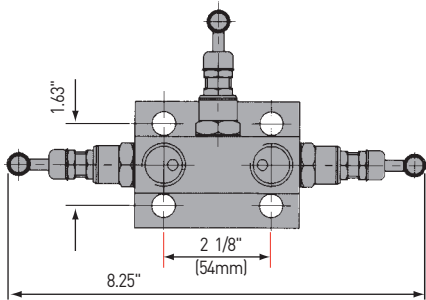


H33 TYPE



Direct mounting flange to flange.



2.0kg

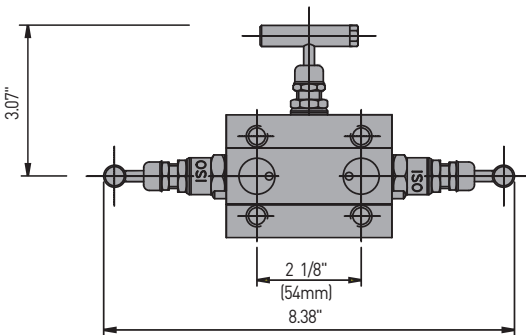


Note: Kidney flanges in many styles are optional




FIVE VALVE MANIFOLDS

Y52 TYPE

Direct mounting flange to flange




2.3kg

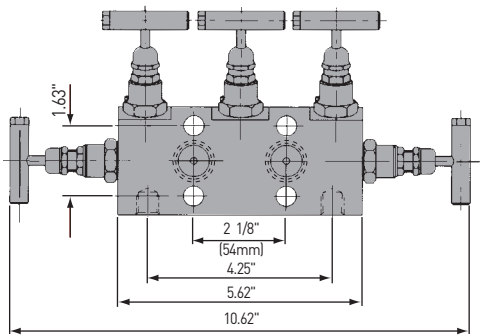


Y53 TYPE

Direct mounting pipe to flange.




2.3kg

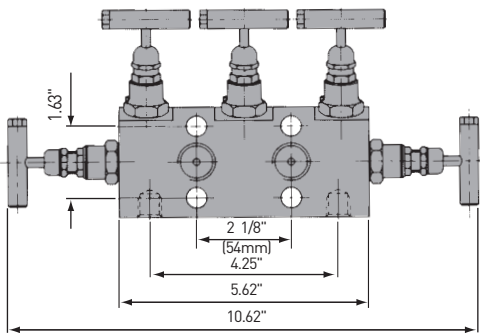


Y54 TYPE

Remote mounting pipe to pipe.



2.3kg

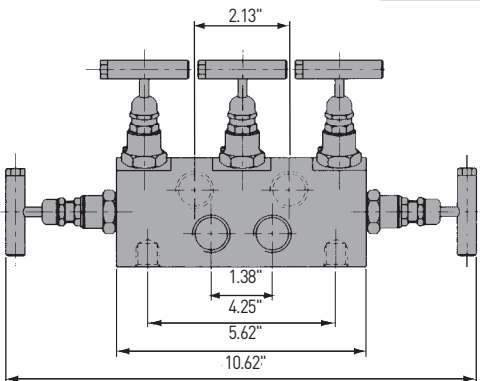

reliability
under
pressure

quality

Accredited to ISO9001:2000, The Oliver Valve companies are able to offer complete component traceability across a wide range of instrumentation, pipeline valves and accessories. Comprehensive in-house facilities satisfy both production and special testing requirements including:

- Hydrostatic testing
- Nitrogen gas testing
- Cryogenic testing
- High temperature testing
- Helium leak detection
- L.P.I. & M.P.I. NDT methods
- Fire testing BS6755 Pt2, API607/4
- Oxygen clean facilities
- Low pressure testing
- Blasting and painting facilities



LLOYD'S 0870012/A



REGISTRATION NUMBER 40697



0038

Oliver Valves Limited Parkgate Industrial Estate
Knutsford Cheshire WA16 8DX England
T +44 (0)1565 632 636 **F** +44 (0)1565 654 089
E sales@valves.co.uk www.valves.co.uk



www.valves.co.uk

CAT OV REV 0-10