

**Product Data Sheet**

**L Type Barstock DBB Valve Pipe to Pipe**



Machined from a barstock body, this valve features two inline ball pattern primary and secondary isolating valves and a ball vent valve.

Ball valve bore size 10mm, 14mm or 20mm

Ideal for injection, sampling and double block and bleed for an instrument.


**Key Features of the Oliver L Type Barstock DBB Valve Pipe to Pipe**

- Compact barstock double block and bleed valve
- Anti-blowout spindle
- Reduced bore valve
- Each valve traceable by unique number
- Cam inter-lock option available

**Standard Specification**

- Maximum Pressure 6000psi
- Maximum Temperature 200°C
- Soft seated ball valve

**General Arrangement Drawing**

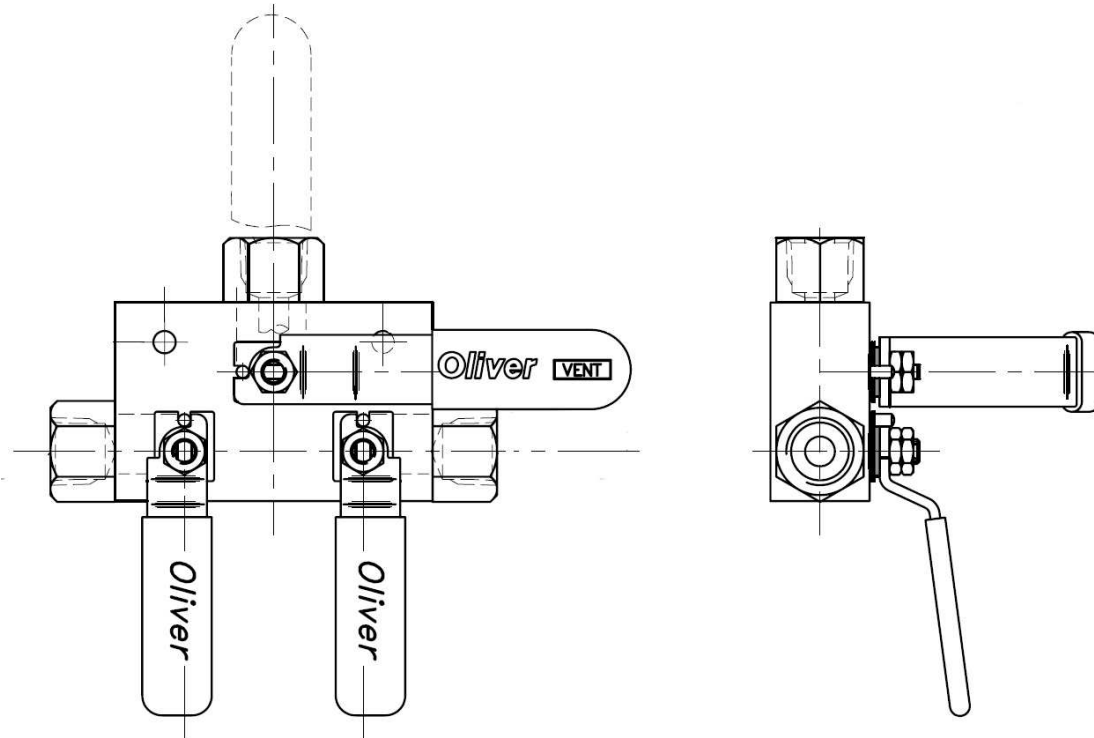

## Ordering Code

(Typical example) → DBB/L / S / X / 50F/50F/50F / FS/HL/NA  
Model / Type

Barstock, 3 ball in line pattern

### Material

S – 316 Stainless steel BSEN 10088 1.4404  
Other materials available on request

### Bore

X – 10mm  
Y – 14mm  
Z – 20mm

### Inlet / Instrument / Vent

#### Connection size

25 - ¼"  
38 - ⅜"  
50 - ½" (std process/instrument & vent)  
75 - ¾"  
10 – 1"

#### Process connection (NPT standard)

BP – BSP parallel pipe thread BS2779-1986  
BT – BSP taper pipe thread BS21 - 1985

#### Connection type

F – Female thread (std instrument/vent)  
M – Male thread

### Options

PK – Peek seats  
2H – 2 mounting holes  
HL – Handle locking

#### Standard

NA – NACE MR-01-75 (latest revision) (EN1A carbon steel to NACE not available)  
FS – Firesafe to API 607 and BS 6755 Part 2  
10mm bore – PTFE/KEL-F seats (200°C max)  
14mm bore – Peek seats (240°C max)  
20mm bore – Peek seats (240°C max)

Rev 1.1