



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 600 (WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Threaded Dimensions conform to ANSI/ASME B1.20.1
- Design as per API 6D
- Fire Test as per API 6FA



Figure no.	Operation	Type of ends
6511	Wrench	THREADED
6512	Wrench	RF
6513	Wrench	RTJ
6514	Wrench	WE

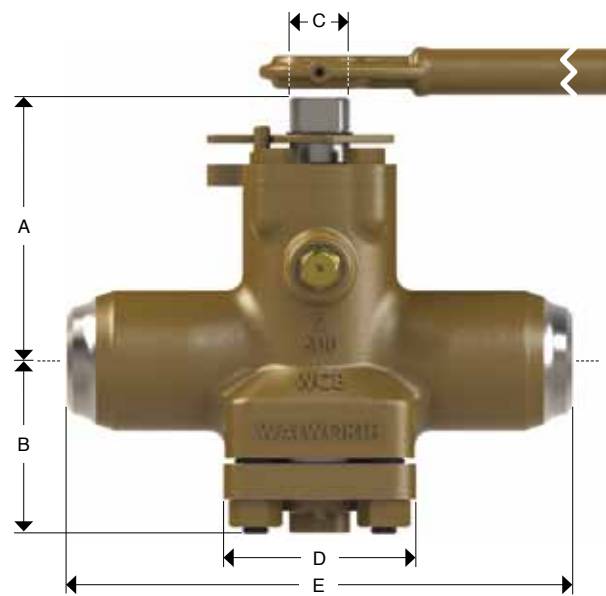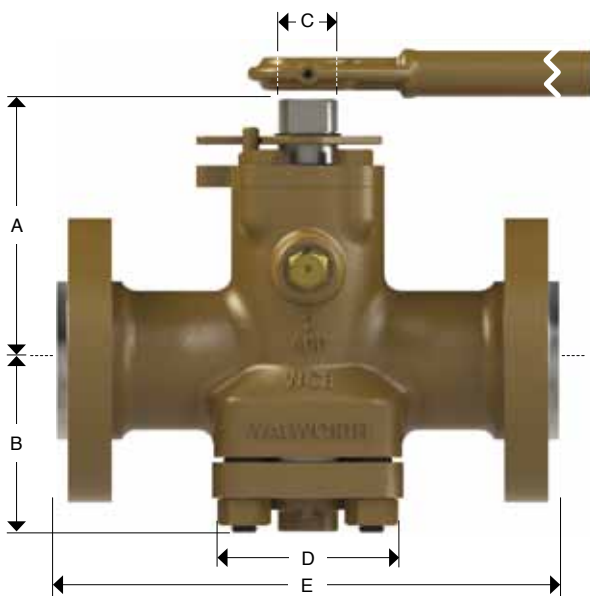

Dimensions and Weights

Nominal Size	General Dimensions								End to End Dimensions								Approx Weight						Wrench No.	
									E								RF/RTJ		WE		THREADED			
	A	B	C	D	RF	RTJ	THREADED	WE	Kg	lb	Kg	lb	Kg	lb	Kg	lb								
1	25	4.5	114	2.78	71	0.74	19	3.62	92	-	-	-	-	-	-	-	-	10	22	7	15	7	15	IB-0
1 1/2	40	5.06	129	3.37	86	1	25	4	102	-	-	-	-	-	-	-	-	17	37	12	26	12	26	IB-1
2	50	5.98	152	3.78	96	1.37	35	4.37	111	11.5	292	11.62	295	7.75	197	11.5	292	24	53	18	40	18	40	IB-2
3	76	6.84	174	5.09	129	1.37	35	5	127	14	356	14.12	359	10	254	14	356	40	88	29	64	29	64	IB-2
4	100	7.37	187	5.88	149	1.37	35	5.75	146	17	432	17.12	435	11.5	292	17	432	70	154	50	110	50	110	IB-2
6	150	9.65	245	7.63	194	1.99	51	9.62	244	22	559	22.12	562	-	-	22	559	172	378	-	-	118	260	IB-3

Note: The same range of valves is available with Flanged by Butt-weld end (RF x WE) with the figure 6515