



COMPENSATOR PLUG VALVE REGULAR PATTERN CLASS 900 (WRENCH OPERATED)

Design Features

- Flanged Dimensions conform to ANSI/ASME B16.5, B16.34
- Butt-weld Dimensions conform to ANSI/ASME B16.25
- Threaded Dimensions conform to ANSI/ASME B 1.20.1
- Design as per API 6D
- Fire Test as per API 6FA



Figure no.	Operation	Type of ends
9511	Wrench	THREADED
9512	Wrench	RF
9513	Wrench	RTJ
9514	Wrench	WE

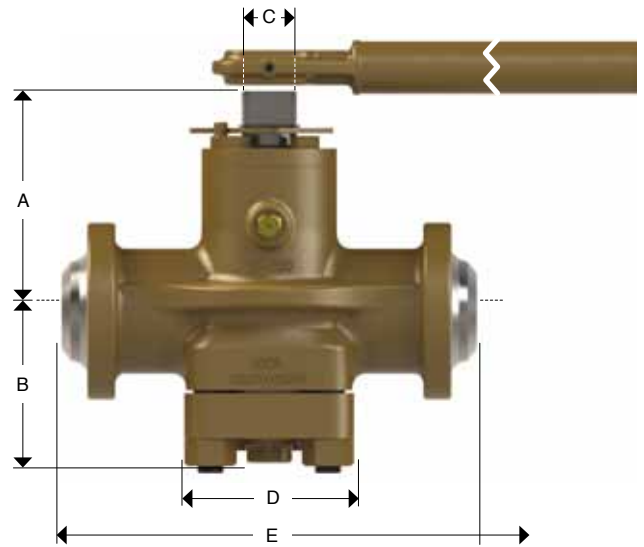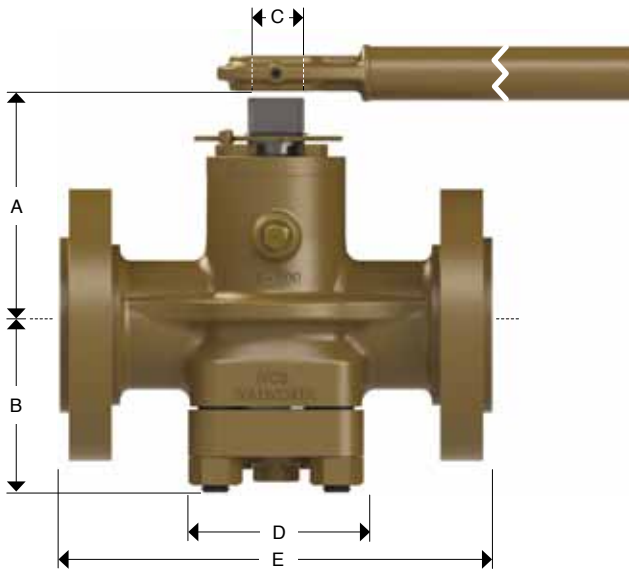

Dimensions and Weights

Nominal Size		General Dimensions								End to End Dimensions								Approx Weight						Wrench No.		
										E								RF/RTJ		WE		THREADED				
		A	B	C	D	RF	RTJ	THREADED	WE	RF/RTJ	WE	THREADED	WE	Kg	lb	Kg	lb	Kg	lb							
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	Kg	lb	Kg	lb	Kg	lb	IB-2
2	50	6	152	3.91	99	1.37	35	4.75	121	14.5	368	14.62	371	7.75	197	-	-	41	90	31	68	31	68	IB-2		
3	76	7.93	201	5.09	129	2	51	6.12	155	15	381	15.12	384	10	254	15	381	65	143	55	121	55	121	IB-3		
4	100	8.65	220	6.19	157	2	51	8.5	216	18	457	18.12	460	11.5	292	18	457	104	229	90	198	90	198	IB-3		

Note: The same range of valves is available with Flanged by Butt-weld end (RF x WE) with the figure 9515