


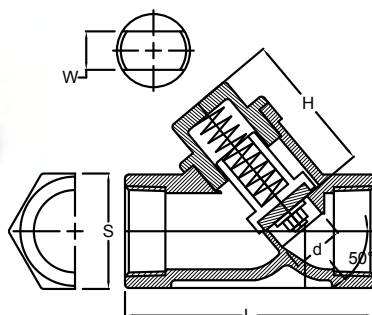


- * Please name the model No. (VTP) when negotiation.
- * Investment Casting Body & Cap.
- * Max. Pressure 300 PSI (20 BAR) W.O.G.
- * Max. Working Temperature 230°C.
- * The End-to-End length conforms to DIN 3202. Part 4. M8 series. (PN 40)
- * Thread Ends conform to ANSI B2.1, BS21, DIN 259/2999 Standard.

Dimension		mm							
Size	inch	1/4	3/8	1/2	3/4	1	1.1/4	1.1/2	2
	mm	8	10	15	20	25	32	40	50
d		11.6	12.5	12.5	18.0	23.5	31.4	35.7	45.5
L		65.5	65.5	65.5	75.5	90.5	111	121	151
S		27	27	27	32	41	50	55.5	70
H		38	38	36	44	57	64	76	87
W		24	24	24	30	35	40	45	55

Material

	Model	VTP
1	Body	CF8M
2	Cap	CF8M
3	Spring	AISI 316
4	Disc	AISI 316
5	Seat	PTFE
6	Washer	AISI 304
7	Nut	AISI 304
8	Joint Gasket	PTFE

STAINLESS STEEL 316 SWING CHECK VALVE CLASS 200

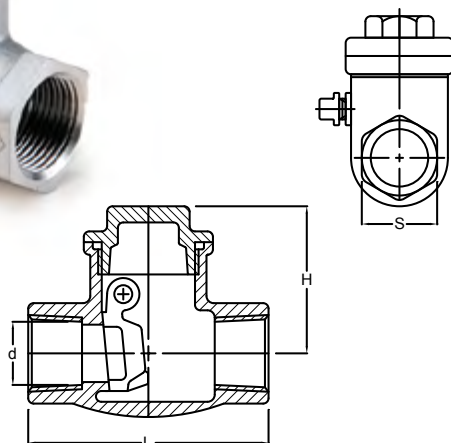

- * Please name the model No. (VTC) when negotiation.
- * Investment Casting Body & Cap.
- * Full port pressure temperature rating 200 PSI W.O.G. 350°F.
- * Thread Ends conform to ANSI B2.1, BS21, DIN 259/2999 Standard.
- * Stainless Steel Class 200 Screwed Cap.
- * Swing Type Disc, Integral Seat.

Dimension		mm							
Size	inch	1/4	3/8	1/2	3/4	1	1.1/4	1.1/2	2
	mm	8	10	15	20	25	32	40	50
d		10	12	15	20	25	32	40	50
L		65	65	65	80	90	105	120	140
S		27	27	27	34	40	50	57	70
H		45	45	45	55	58	62	75	78

Material

	Model	VTC
1	Body	CF8M
2	Cap	CF8M
3	Disc	AISI 316
4	Hinge Pin	AISI 316
5	Packing	PTFE
6	Pipe Plug	AISI 316