

317[®] Rubber / Stainless Steel
Expansion Joint & Flexible Joint

ISO 9001



TN313

T-ONE-S (MFG) TRADING INC.

Cat. Sep06

RUBBER EXPANSION JOINT

SINGLE SPHERE. NEO. WITH FLOATING FLANGE SS41 TO JIS 10K, ASA 150LBS. DRILLED. ELASTOMER: SYNTHETIC RUBBER SIZE: 1"~28"

MODEL: AMS-JIS / AMS-ASA



RUBBER EXPANSION JOINT

TWIN SPHERE. NEO. WITH FLOATING FLANGE SS41 TO JIS 10K, ASA 150LBS. DRILLED. ELASTOMER: SYNTHETIC RUBBER SIZE: 1-1/2"~24"

MODEL: AMT-JIS / AMT-ASA



RUBBER EXPANSION JOINT

TWIN SPHERE. WITH UNION THREAD ELASTOMER: SYNTHETIC RUBBER SIZE: 1/2"~3"

MODEL: AMU



RUBBER EXPANSION JOINT

WIDE ARCH DESIGN. SINGLE SPHERE WITH SS41 FLANGE TO ASA 150 LBS, DIN PN16, DRILLED. VACUUM 26" HG. SIZE: 2"~16"

MODEL: AMS-WA



RUBBER EXPANSION JOINT

SINGLE SPHERE. FCD FLANGE WITH FCD THREADED UNION VACUUM 26" HG. SIZE: 1/2"~2"


MODEL: AMSU



RUBBER EXPANSION JOINT

TWIN SPHERE. FCD FLANGE WITH FCD THREADED UNION VACUUM 26" HG. SIZE: 1/2"~2"

MODEL: AMTU

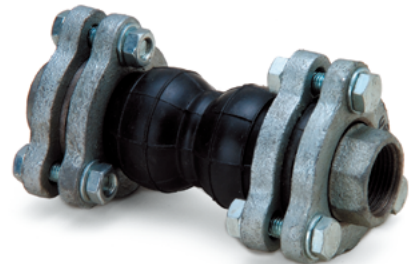

METALLIC BELLOWS

BODY: 300 SERIES ST.ST.
(ST.ST.304 STANDARD BELLOWS)
MOVEMENT: 25MM, 50MM, 75MM.
SIZE: 15~600MM.


MODEL: BELLOWS



BELLOWS EXPANSION JOINT VAN STONED END TYPE WITH INTERNAL SLEEVE

BELLOWS/SLEEVE: 300 SERIES ST.ST.
FLANGE: DUCTILE, CARBON STEEL,
ST.ST. 300 SERIES.
W.P.: 10 BARS. SIZE: 40~300MM.


MODEL: JF150S

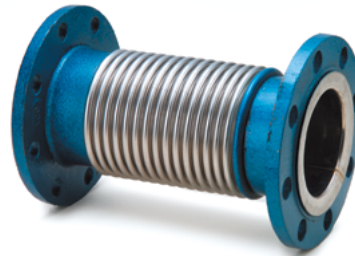

BELLOWS EXPANSION JOINT VAN STONED END TYPE WITH INTERNAL SLEEVE & TIE RODS

BELLOWS/SLEEVE: 300 SERIES ST.ST.
FLANGE: DUCTILE, CARBON STEEL,
ST.ST. 300 SERIES.
W.P.: 10 BARS. SIZE: 40~300MM.


MODEL: JF150SG

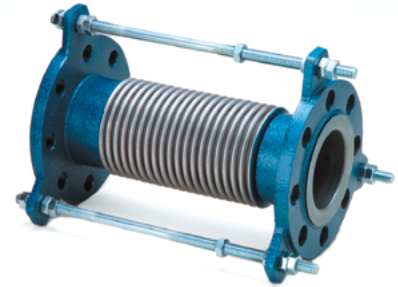

BELLOWS EXPANSION JOINT WITH TUBE & FLANGED TYPE *INTERNAL SLEEVE (OPTION)

BELLOWS/SLEEVE: 300 SERIES ST.ST.
FLANGE: DUCTILE, CARBON STEEL,
ST.ST. 300 SERIES.
W.P.: 10 BARS. SIZE: 15~600MM.

MODEL: JF250SG/250S/250N SERIES



BELLOWS EXPANSION JOINT WELDED WITH TUBE END *INTERNAL SLEEVE (OPTION)

BELLOWS/SLEEVE: 300 SERIES ST.ST.
TUBE END: CARBON STEEL, ST.ST.
W.P.: 10 BARS. SIZE: 15~600MM.

MODEL: JF250SP/250P/250ST SERIES



BELLOWS EXPANSION JOINT WELDED WITH TUBE END MULTIPLY BELLOWS

BELLOWS/SLEEVE: 300 SERIES ST.ST.
TUBE END: CARBON STEEL, ST.ST.
W.P.: 16, 25 BARS. SIZE: 15~600MM.

MODEL: JF400P (NO SLEEVE)



BELLOWS EXPANSION JOINT WELDED WITH TUBE END MULTIPLY BELLOWS. WITH INTERNAL SLEEVE

BELLOWS/SLEEVE: 300 SERIES ST.ST.
TUBE END: CARBON STEEL, ST.ST.
W.P.: 16, 25 BARS. SIZE: 15~600MM.

MODEL: JF400SP



BELLOWS EXPANSION JOINT FLANGED END TYPE MULTIPLY BELLOWS WITH INTERNAL SLEEVE

BELLOWS/SLEEVE: 300 SERIES ST.ST.
FLANGE: CARBON STEEL, ST.ST.
W.P.: 16, 25 BARS. SIZE: 15~600MM.

MODEL: JF400S (NO RODS)



BELLOWS EXPANSION JOINT FLANGED END TYPE WITH INTERNAL SLEEVE & TIE RODS

BELLOWS/SLEEVE: 300 SERIES ST.ST.
FLANGE: CARBON STEEL, ST.ST.
W.P.: 16, 25 BARS. SIZE: 15~600MM.

MODEL: JF400SG



DIFFERENT SIZE, MOVEMENT, PRESSURE RATING, AND MATERIAL AVAILABLE ON REQUEST.

**BELLOWS EXPANSION JOINT
WELDED WITH TUBE END
TWO MULTIPLY BELLOWS**

*FLANGES (OPTION)
BELLOWS/SLEEVE: 300 SERIES ST.ST.
TUBE END: CARBON STEEL, ST.ST.
W.P.: 16, 25 BARS. SIZE: 50~600MM.


MODEL: JF800P / JF800



**BELLOWS EXPANSION JOINT
WELDED WITH TUBE END
FLANGES AND EXTERNAL COVER**

BELLOWS/SLEEVE: 300 SERIES ST.ST.
TUBE END: CARBON STEEL, ST.ST.
W.P.: 10 BARS. SIZE: 15~600MM.

MODEL: JF1000 / JF1000H

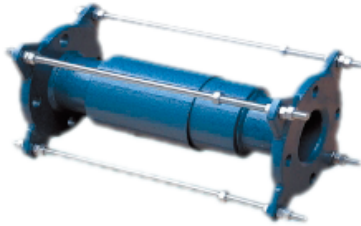

**BELLOWS FLEXIBLE JOINT
DE-VIBRATION VAN STONED TYPE**

BELLOWS: 300 SERIES ST.ST.
FLANGE: DUCTILE, C/S, ST.ST.
TIE RODS (OPTIONAL): C/S, ST.ST.
W.P.: 10, 20 BARS. SIZE: 40~600MM.

MODEL: JF500 / JF500N / JF500H



**BRAIDED HOSE FLEXIBLE JOINT
UNION TYPE**

BELLOWS: 300 SERIES ST.ST.
WIRE BRAID: ST.ST.304
UNION: DUCTILE, ST.ST.
SIZE: 15~100MM.

MODEL: JF500U



**BRAIDED HOSE FLEXIBLE JOINT
THREAD END TYPE**

BELLOWS: 300 SERIES ST.ST.
WIRE BRAID: ST.ST.304
SCREWED END: ST.ST.
SIZE: 15~100MM.


MODEL: JF500T



**BRAIDED HOSE FLEXIBLE JOINT
FLANGED END TYPE**

BELLOWS: 300 SERIES ST.ST.
WIRE BRAID: ST.ST.304
FLANGE: CARBON STEEL, ST.ST.
SIZE: 15~300MM.

MODEL: JF600 / JF600M

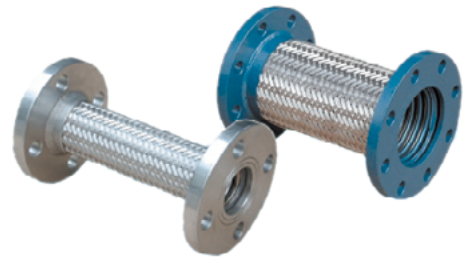

DIFFERENT SIZE, MOVEMENT, PRESSURE RATING, AND MATERIAL AVAILABLE ON REQUEST.

**BRAIDED HOSE FLEXIBLE JOINT
WELDED WITH TUBE END AND
FLANGES. NO EXPANSIBILITY**

BELLOWS: 300 SERIES ST.ST.
WIRE BRAID: ST.ST.304
TUBE END: C/S, ST.ST.
SIZE: 50~300MM.


MODEL: JF400BW



**BRAIDED HOSE FLEXIBLE JOINT
DOUBLE SLEEVES AND FLANGES**

BELLOWS: 300 SERIES ST.ST.
FLANGE: C/S, ST.ST.
TIE RODS: C/S, ST.ST.
SIZE: 32~600MM.

MODEL: JF500HE



ASR ANAB **uniwu** ISO 9001

Thermodynamic St.St. 316 Steam Trap

Model: UN-317
Working Pressure: 4.5-600 Lbs / PN 0.3-40
Working Temperature: 250°C / 482°F

UNIWI GROUP
T-ONE-S (MFG) TRADING INC. Sep. 2008