


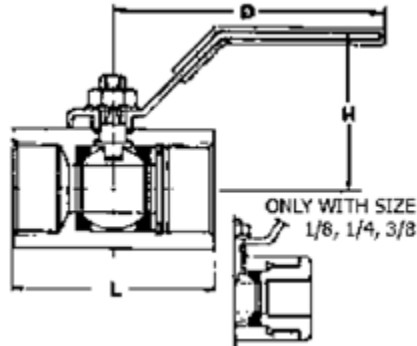

- Please name the model No. (BV-316, BV-304, BV-45C) when negotiation.
- The available THREAD: ANSI B2.1, BS21 or DIN-259.
- The handle of AISI 316 or AISI 304 is available when required.

Test Pressure

Body 1500 PSI (Hydrostatic)
Seat 150 PSI (Air)

Material

Model	BV-316	BV-304	BV-45C
Body	AISI 316	AISI 304	Carbon Steel S45C
Ball	AISI 316	AISI 304	AISI 304
Stem	AISI 316	AISI 304	AISI 304
Stem Packing	PTFE	PTFE	PTFE
Seal/Seat	PTFE	PTFE	PTFE
Gland Ring	AISI 316	AISI 304	AISI 304
Seat Retainer	AISI 316	AISI 304	AISI 304
Ring	AISI 304	AISI 304	AISI 304
Nut	S.S. 41	S.S. 41	S.S. 41
Washer	S.S. 41	S.S. 41	S.S. 41
Handle	S.S. 41	S.S. 41	S.S. 41

Dimension

Size	inch	1/4	3/8	1/2	3/4	1	1.1/4	1.1/2	2
	mm	8	10	15	20	25	32	40	50
Bore Size		7	7	9.2	12.5	15	20	25	32
L		57	57	60	66	76	90	98	108
H		40	40	42	45	55	60	65	70
D		90	90	100	100	125	125	150	150
Torque kgf/cm ²		40	40	40	45	50	110	125	140

1-PC INVESTMENT CASTING BALL VALVE (HEXAGON TYPE) 1000 WOG


- Please name the model No. (BV-HX6, BV-HX2) when negotiation.
- The available THREAD: ANSI B2.1, BS21 or DIN-259.

Test Pressure

Body 1200 PSI (Hydrostatic)
Seat 150 PSI (Air)

Material

Model	BV-HX6	BV-HX2
Body	AISI 316	Carbon Steel S45C
Ball	AISI 316	AISI 304
Stem	AISI 316	AISI 304
Seal/Seat	PTFE	PTFE
Gland Ring	AISI 316	AISI 304
Seat Retainer	AISI 316	AISI 304
Ring	AISI 304	AISI 304
Nut	S.S. 41	S.S. 41
Washer	S.S. 41	S.S. 41
Handle	S.S. 41	S.S. 41

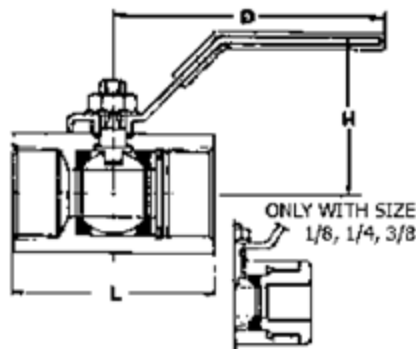

Dimension

Size	inch	1/4	3/8	1/2	3/4	1	1.1/4	1.1/2	2
	mm	8	10	15	20	25	32	40	50
Bore Size		7	7	9.2	12.5	15	20	25	32
L		39	44	57	60	72	78	84	99
H		30	32	38	40	45	50	58	65
D		63	70	85	85	100	106	128	128
Torque kgf/cm ²		40	40	40	45	50	110	125	140