


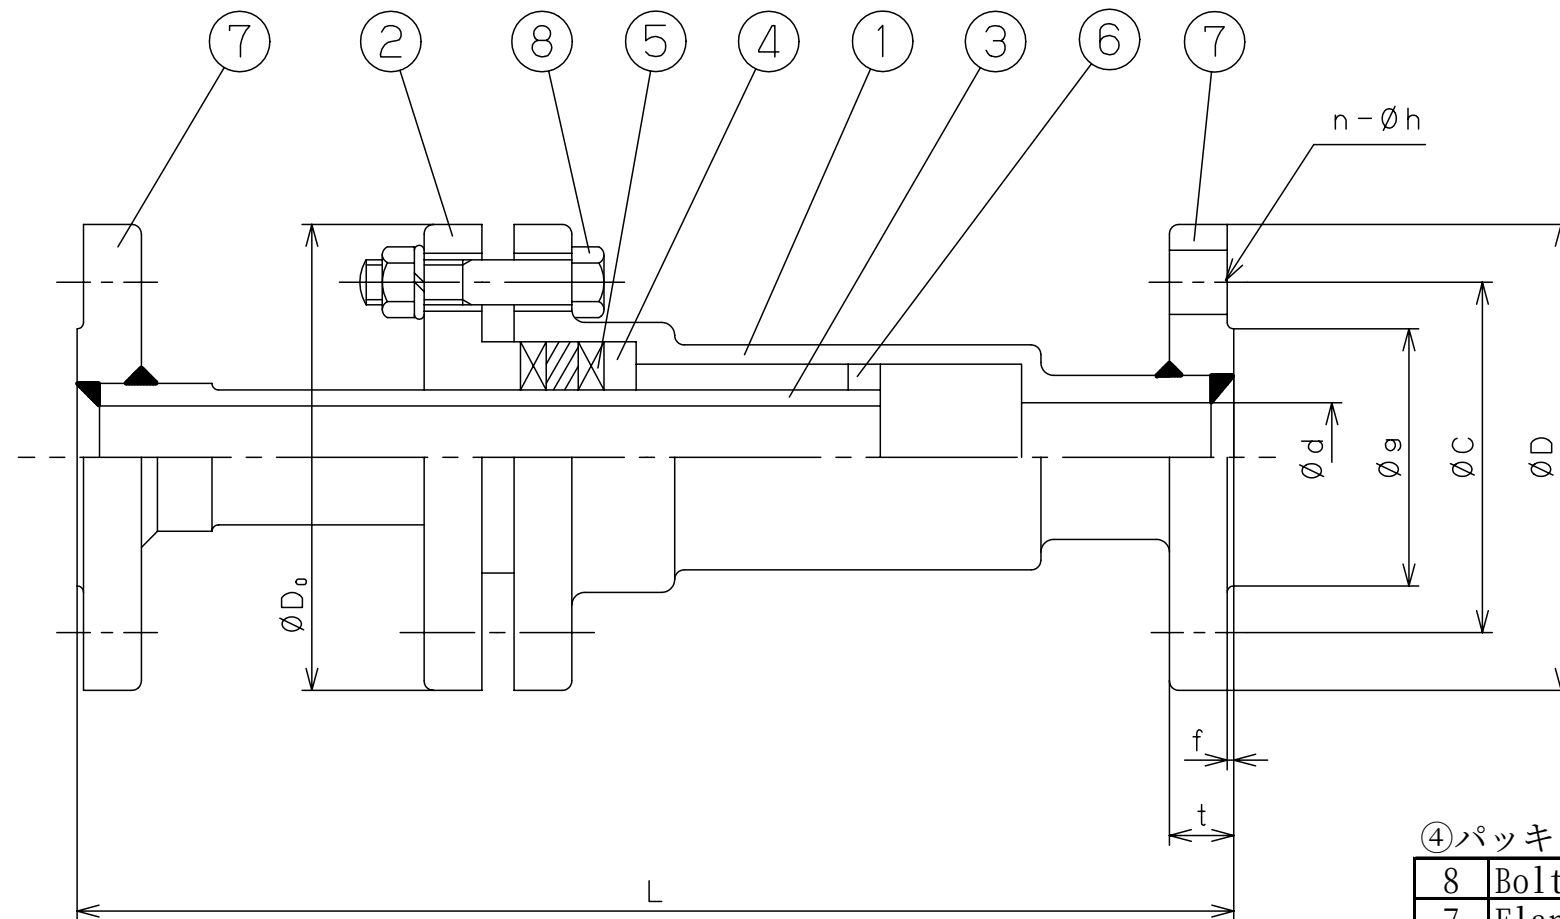

Size	d	面 間 寸 法 L			最大伸縮量	D ₀	Flange JIS 10K RF						
		設定面間	使用最大面間	使用最小面間			D	t	f	g	C	n-h	
25A	25	560	600	400	200	114	125	14	1	67	90	4-19	
32A	32	560	600	400	200	124	135	16	2	76	100	4-19	
40A	40	560	600	400	200	130	140	16	2	81	105	4-19	
50A	50	560	600	400	200	142	155	16	2	96	120	4-19	
65A	65	600	640	440	200	175	175	18	2	116	140	4-19	
80A	80	600	640	440	200	188	185	18	2	126	150	8-19	
100A	100	640	680	480	200	216	210	18	2	151	175	8-19	
125A	125	640	680	480	200	242	250	20	2	182	210	8-23	
150A	150	690	730	530	200	290	280	22	2	212	240	8-23	
200A	200	690	730	530	200	340	330	22	2	262	290	12-23	
250A	250	740	780	580	200	400	400	24	2	324	355	12-25	
300A	300	740	780	580	200	465	445	24	3	368	400	16-25	

④パッキン受全周及び③スリーブ摺動部⑥ストッパー外周：硬質クロームメッキ

8	Bolt & Nut	Rolled Steel	ボルト・ナット	SS400	1set
7	Flange	Rolled Steel	フランジ	SS400	2
6	Stopper	Carbon Steel Tube	ストッパー	STKM13A	1
5	Packing	Non-Asbestos	パッキン	Non-Asbestos	1set
4	Packing Ring	Carbon Steel Tube	パッキン受け	STKM13A	1
3	Sleeve	Carbon Steel Tube	スリーブ	STKM13A	1
2	Packing Gland	Rolled Steel	パッキン押え	SS400	1
1	Body	Carbon Steel Tube	本体	STKM13A	1
No.	Name of Parts	Material	部品名	材質	Q.TY

Specification	
Fluid	
Max.Press.	MPa
Max.Temp.	°C
Expansion Amt.	+ , - mm

TYPE ES-10-200 EXPANSION JOINT 伸 縮 管 継 手

Approval	M. Kume
Check	M. Kume
Drawing	T. Shinjo
Drawing No.	Y-500-6206
Date	29 MAR.2007

Yoshitake
INC.
<http://www.yoshitake.co.jp>