
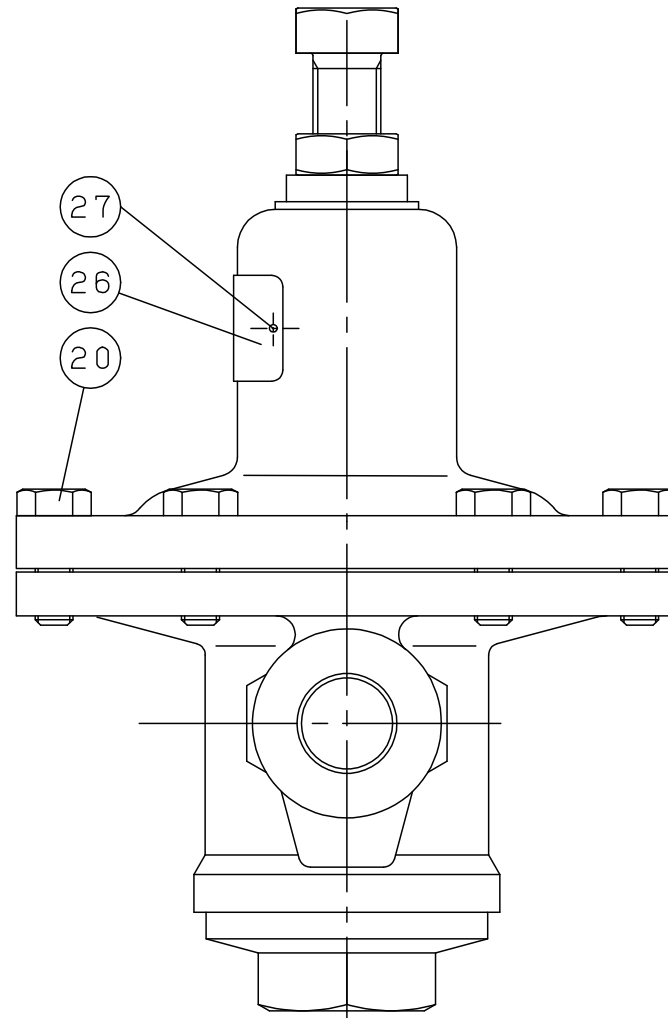


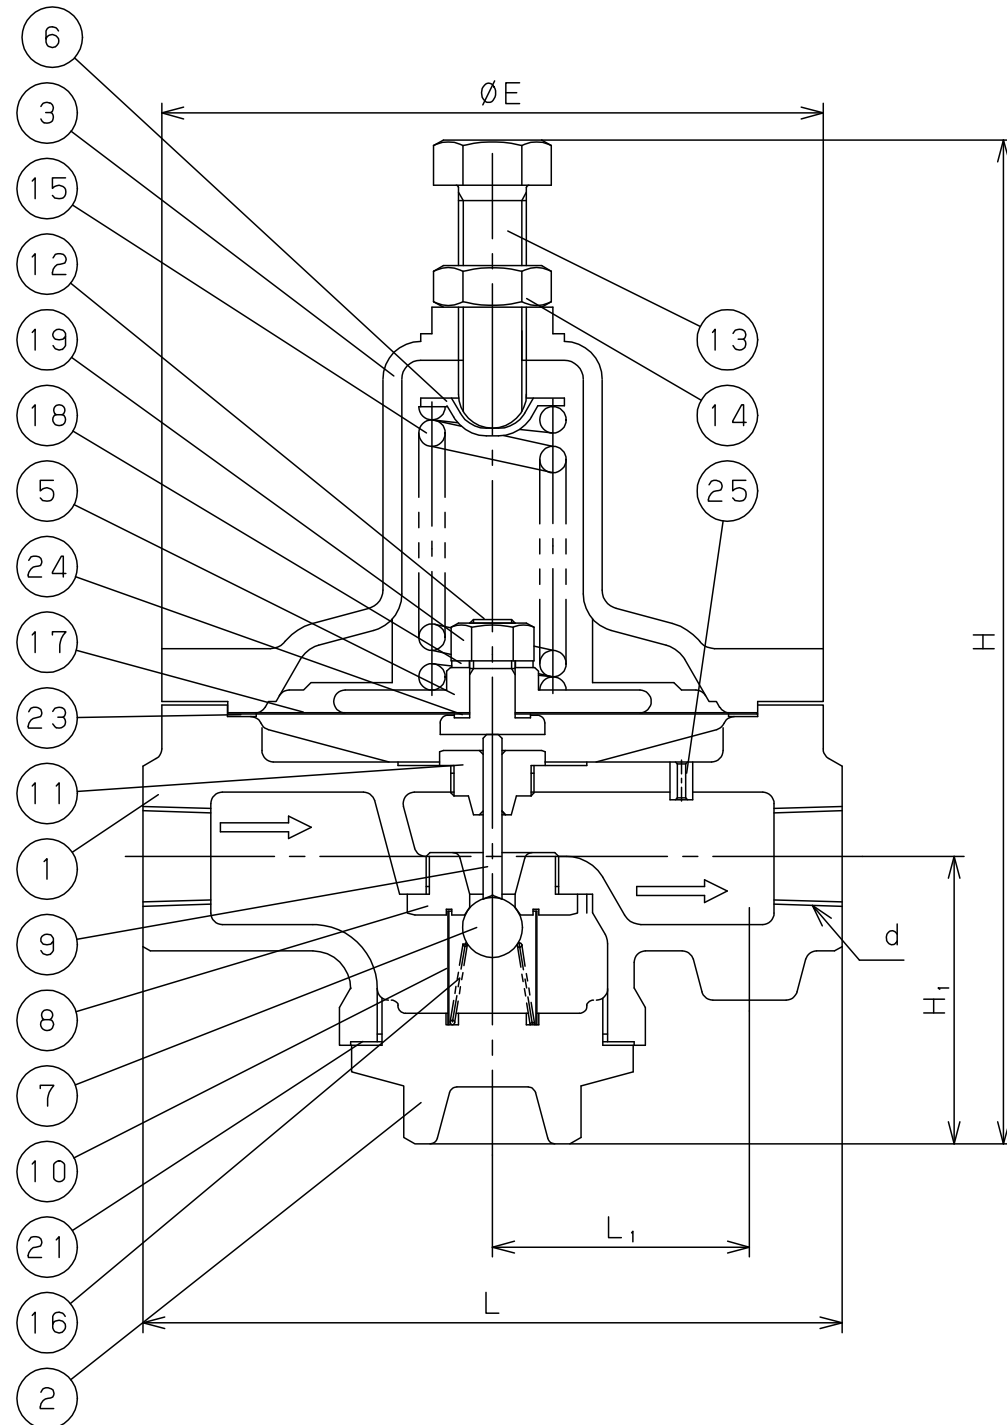

27	Rivet	Carbon Steel	打込ねじ	S15C	2
26	Name Plate	Aluminium	銘板	A1050P	1
25	Guide Pipe	Brass	パイプノック	C3604	1
24	Gasket	Non-Asbestos	ガスケット	Non-Asbestos	1
23	Gasket	Non-Asbestos	ガスケット	Non-Asbestos	1
21	Gasket	Non-Asbestos	ガスケット	Non-Asbestos	1
20	Bolts	Rolled Steel	六角ボルト	SS400	6
19	Nut	Rolled Steel	六角ナット	SS400	1
18	Spring Washer	Stainless Steel	ばね座金	SUS304	1
17	Diaphragm	Stainless Steel	ダイヤフラム	SUS301	1
16	Main Valve Spring	Stainless Steel	弁体ばね	SUS304	1
15	Adjusting Spring	Steel Wire	調節ばね	SWC	1
14	Lock Nut	Rolled Steel	ロックナット	SS400	1
13	Adjusting Screw	Rolled Steel	調節ねじ	SS400	1
12	Diaphragm Stopper	Brass	ダイヤフラム押え	C3604	1
11	Guide	Brass	ガイド	C3604	1
10	Screen	Stainless Steel	スクリーン	SUS304	1
9	Spinde	Stainless Steel	弁棒	SUS304 or SUS420J2	1
8	Main Valve Seat	Stainless Steel	弁座	SUS304	1
7	Main Valve	Stainless Steel	弁体	SUS440C	1
6	Washer of Spring	Carbon Steel	上部ばね受	SPCD	1
5	Washer of Spring	Cast Iron	下部ばね受	FC200	1
3	Spring Chamber	Cast Iron	保護筒	FC200	1
2	Bottom Cap	Ductile Cast Iron	下部キャップ	FCD450	1
1	Body	Ductile Cast Iron	本体	FCD450	1
No.	Name of Parts	Material	部 品 名	材 質	Q.TY

(mm)							
Size	d	L	L ₁	φ E	H	H ₁	Weigth(kg)
10A	Rc 3/8	165	60	155	243	57	5.5
15A	Rc 1/2	165	60	155	243	57	5.5
20A	Rc 3/4	185	70	175	267	76	8.2
25A	Rc 1	185	70	175	267	76	8.2

Specification	
Fluid	
Inlet Press.	MPa
Reduced Press.	MPa
Temp.	℃
Flow Rate	

TYPE GD-6N PRESSURE REDUCING VALVE
減 圧 弁

Approval	M. Kume
Check	M. Yoshida
Drawing	H. Okumura
Drawing No.	Y-215-6501
Date	19 JAN. 2011

