

AWWA C515 NRS Resilient Seated Gate Valve

FIG. 3648-MJxMJ Ends
FIG. 3649-FLxMJ Ends

Specification

- Meet or exceed the requirements of AWWA C515 standard.
- Full waterway.
- 2" Square Operating Nut.
- Rubber fully encapsulated ductile iron wedge.
- Triple O-Ring stem seal.
- Flange and drilling complies with ASTM B16.1 Class 125.
- Mechanical joint outlet complies with ANSI/AWWA C153/A21.53.

Working Pressure and Temperature

- 150psi /200psi for size 2" to 30" rated at -10°C to 120 °C.
- 250psi for size 2" to 18" rated at -10°C to 120 °C.

Corrosion Protection

- Fusion bonded coating interior and exterior meet or exceed all applicable of AWWA C550 standard.

Options

- ASTM A276 Grade 316 stem.
- Stainless steel fasteners: A2-70 or A4-70.
- With post flange.
- Operated with handwheel, operating nut , gearbox or actuator.


Material Specifications

Part Name	Materials	ASTM Specification
Body	Ductile Iron	A536 65-45-12
Bonnet	Ductile Iron	A536 65-45-12
Wedge	EPDM Fully Encapsulated Ductile Iron Wedge	
Thrust Collar	Bronze	B148 C95200
Wedge Nut	Bronze	C95200
Stem	Stainless Steel	A276 Grade 304
O-Ring	Rubber	D2000 BUNA-N
Gasket	Rubber	D2000 EPDM
Gland	Ductile Iron	A536 65-45-12
Fasteners	Ductile Iron	A307, Grade B
Operating Nut	Carbon Steel	A536 65-45-12
Handwheel	Ductile Iron	A536 65-45-12

Dimensions(mm)

Size		2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"	30"
L	MJxMJ	235	241	254	292	305	375	378	432	432	432	457	508	762
	FLxMJ	206.5	222	241	280	318	353	367	406	419	432	457	508	686
H		240	280	305	417	525	621	711	905	980	1115	1190	1340	1730
D		175	255	255	305	355	405	405	558	558	610	610	762	-

Schematic

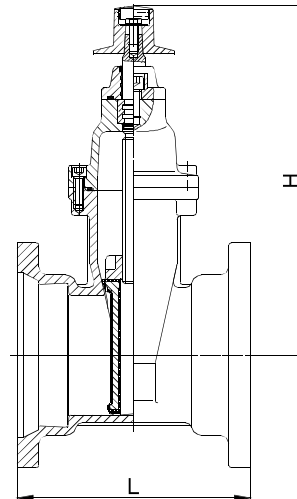

Notes

- Designs, materials and specifications shown are subject to change without notice due to the continuous development of our products.