


BUTTERFLY VALVE

DIMENSIONS AND WEIGHTS (Triple Offset Type)

ASME CLASS 1500 (PN 250)

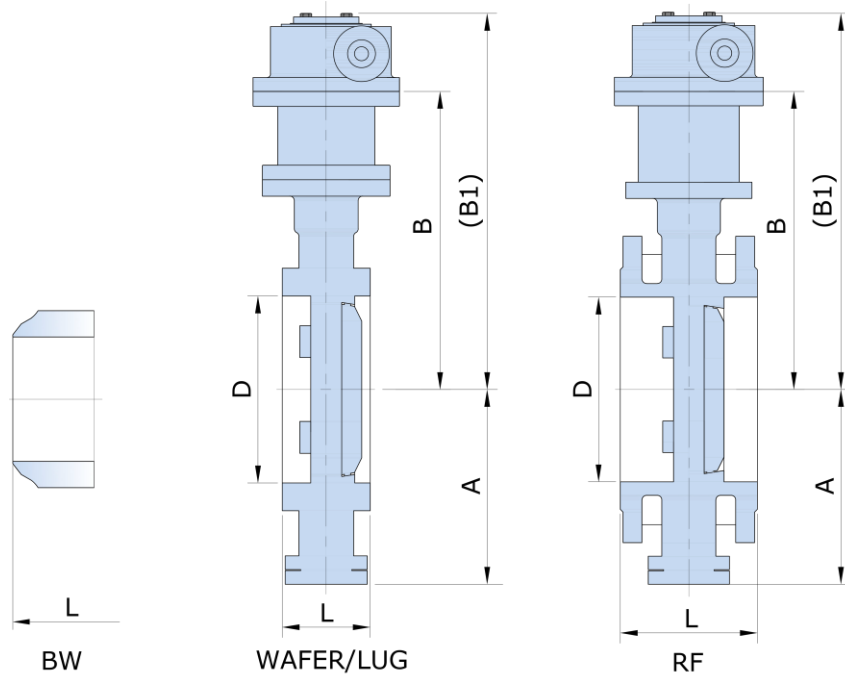

ASME CLASS 1500 (PN 250)

Size in/mm	D	L			A	B	B ₁	Weight (lb/kg)			
		WAFER / UG	RF	BW				WAFER	LUG	RF	BW
8	8	8.27	12.2	12.2	13.78	14.17	22.05	520	427	654	507
200	200	210	310	310	350	360	560	236	194	297	230
10	10	9.06	14.57	14.57	15.75	18.5	26.38	835	683	1066	881
250	250	230	370	370	400	470	670	379	310	484	400
12	12	10.63	16.14	16.14	17.72	20.47	30.71	1273	1040	1626	1344
300	300	270	410	410	450	520	780	578	472	738	610
14	14	11.42	17.72	17.72	18.9	24.41	32.68	1579	1267	2048	1498
350	350	290	450	450	480	620	830	717	575	930	680
16	16	13	19.3	19.3	21.26	27.56	36.22	2500	1993	3249	2599
400	400	330	490	490	540	700	920	1135	905	1475	1180
18	18	23.78	20.87	20.87	22.83	28.35	38.19	3011	2445	3859	3194
450	450	350	530	530	580	720	970	1367	1110	1752	1450
20	20	14.57	22.44	22.44	24	31.5	41.34	4163	5650	5242	4515
500	500	370	570	570	610	800	1050	1890	2565	2380	2050
24	24	16.14	25.6	25.6	27.56	49.21	63	6108	6108	7659	6806
600	600	410	650	650	700	1250	1600	2773	2723	3477	3090

The dimension and weights are for reference only and subject to change without notice.