



Wet Barrel Fire Hydrant

Fig.1511



Technical Specification

Design Standard	FM 1511/UL 246/AWWA C503
Nozzle Standard	NFPA 1963
Monitor Flange	Size: 4"-ANSI Class125
Pipe Flange	Size: 6"-ANSI Class125
Working Pressure	250PSI

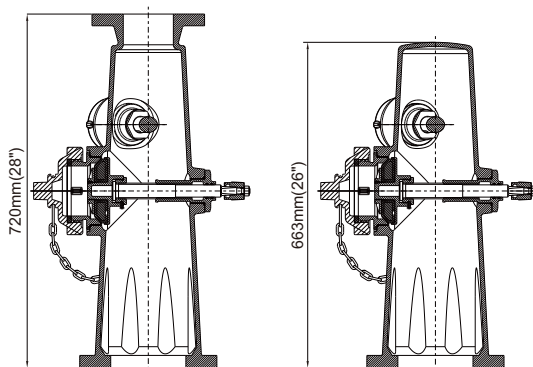

Part Name	Material
Hydrant Body	A536 65-45-12
Pumper Connection	
Chain	Carbon Steel + Zn
O-Ring	EPDM
Pumper Nozzle Cap	A536 65-45-12
Pumper Nozzle	C84400
Pumper Nozzle Gasket	EPDM
4.5" Gland	A351 CF8
Inner Six Angle Flat End Set Screw	A2
4.5" Disc Sealing Ring	EPDM
4.5" Disc	A351 CF8
Shaft	AISI 304/420
Fasten Nut	AISI 304
Inner Six Angle Cylindrical Head Screw	A2-70
4.5" Shaft Nut	C84400
O-Ring	EPDM
Operating Nut	A351 CF8
Hexagon Nut	A2-70
Hexagon Headed Bolt	AISI 304
Flat Washer	AISI 304
Hexagon Nut	AISI 304
Inner Six Angle Set Screw	Carbon Steel + Zn
Hose Connection	
O-Ring	EPDM
Hose Nozzle Cap	A536 65-45-12
Hose Nozzle	C84400
Hose Nozzle Gasket	EPDM
2.5" Gland	A351 CF8
2.5" Disc Sealing Ring	EPDM
2.5" Disc	A351 CF8
Shaft Stem Nut	C84400
Inner Six Angle Set Screw	Carbon Steel + Zn

Model Options

Model No.	Hose Nozzle	Pumper Nozzle	Monitor Flange	Pipe Flange
F1511-2H0P	2-1/2" *2	--	--	6"
F1511-2H0PM	2-1/2" *2	--	4"	6"
F1511-1H1P	2-1/2" *1	4" or 4-1/2" Pumper Connection *1	--	6"
F1511-1H1PM	2-1/2" *1	4" or 4-1/2" Pumper Connection *1	4"	6"
F1511-2H1P	2-1/2" *2	4" or 4-1/2" Pumper Connection *1	--	6"
F1511-2H1PM	2-1/2" *2	4" or 4-1/2" Pumper Connection *1	4"	6"