


FLEXIBLE HOSE

Union Type Flexible Hose

Fig.GF100

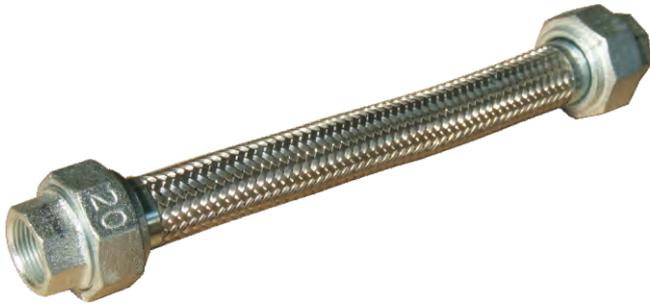

Application

Absorption of the piping strain in the line of water, steam, oil, chemicals, etc., absorption of vibration and ground sinking.


Max. Working Temperature

220°C

Max. Working Pressure

16 and 25 kgf/cm²

Construction

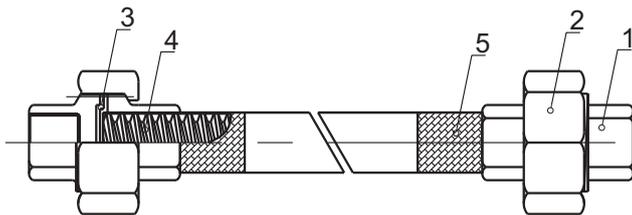

No.	Parts	Materials
1	Union Screw	Non-Asbestos / Stainless Stessl
2	Union Nut	Non-Asbestos / Stainless Stessl
3	Gasket	Fiber
4	Flexible Tube	Stainless Steel
5	Braid	Stainless Steel

Specification

Nominal Diameter		Overall Length	Lateral Movement	Working Pressure
DN	inch			
15	1/2	300	25	16
20	3/4	300	25	16
25	1	300	25	16
32	1-1/4	300	20	16
40	1-1/2	300	15	16
50	2	300	20	16

Remarks:

Special length available on request.
Higher pressure rating is available.