




Cat.no.:E-PS



Cat.no.:E-GGC




Cat.no.:E-TMBV

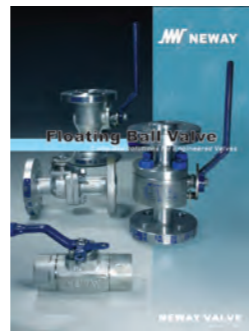

Cat.no.:E-FBV




Cat.no.:E-DOV

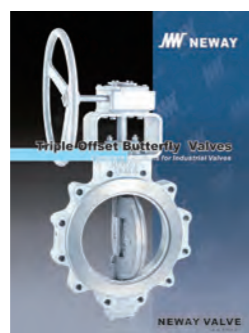


Cat.no.:E-TOV



Cat.no.:E-PLV

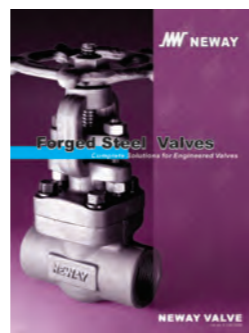

Cat.no.:E-FSV

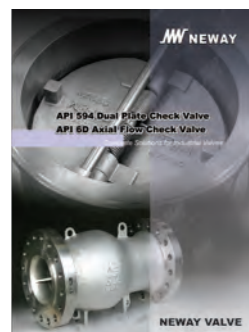

Cat.no.:E-DAV



Cat.no.:E-CPS



Cat.no.:E-AV



Cat.no.:E-PV

NW NEWAY
NEWAY VALVE (SUZHOU) CO., LTD.

No.666 TaiShan Road, Suzhou New District, P.R. China
Post Code:215129
Tel: 86-512-666-51365
Fax: 86-512-666-18930-2102
E-Mail: overseas.sales@neway.com.cn
<http://www.newayvalve.com>

Distributed by:

Cat.no.:E-CBV-2019

NW NEWAY

Cryogenic Ball Valve

Complete Solutions for Industrial Valves

NEWAY VALVE

Cat.no.:E-CBV-2019

Table of Contents

Introduction

- 1 Quality Commitment
- 2~3 How to order
- 4 Advanced Manufacturing & Quality Control
- 5 Design Features
- 6~7 Dimensions and Weights

BBG/BG series Cryogenic Ball Valve

- 5 Design Features
- 6~7 Dimensions and Weights

BDG series Cryogenic Ball Valve

- 8 Design Features
- 9 Dimensions and Weights

BSG series Cryogenic Ball Valve

- 10~11 Design Features
- 12~14 Dimensions and Weights

BEG series Cryogenic Ball Valve

- 15 Design Features
- 16~17 Dimensions and Weights

Engineering Data

- 18 Pressure Temperature Chart
- 19 Soft Seat Material
- 20 Operating Torque



Complete Solutions for Industrial Valves

As a global leader of valve manufacturing, Neway (SSE:603699) is dedicated to the production, research, and development of industrial valves. Neway is committed to providing complete valve solutions to all industries through advanced engineering and innovation.

Neway's product line includes Ball, Butterfly, Gate, Globe, Check, Nuclear, Control, Subsea, Safety valves. Our high quality standards and innovative ability are recognized by many global end users and EPCs. Neway valves are utilized in a wide variety of industries and working conditions such as Refining, Chemical, Coal Chemical, Offshore(including subsea), Air Separation, LNG, Nuclear Power, Power Generation, and Pipeline Transmission applications.

Facilities & Service

Neway has developed a sophisticated multi-plant management system operating one valve assembly plant, one API6A valve plant, three foundries, and one R&D center. Our largest assembly plant was expanded in 2013, and it now covers 230,000 square meters.

Advanced software (ANSYS, FE-Safe, CF-Design, Siemens PLM and NX) is applied here at Neway for the Research & Development of products. We use SAP to control the traceability and status of all products during the manufacturing process. In order to ensure the safety, eco-friendliness, and reliability of our products, we use the most advanced fire-safe, cryogenic, high pressure, and fugitive emission test equipment.

As part of Neway's global strategy, to provide better service to our customers, we have established our overseas subsidiaries in USA, Netherlands, Italy, Singapore and Dubai along with over 80 agents and distributors worldwide.

High Quality, High Value

Neway is dedicated to the pursuit of "Zero Defect". We maintain a quality management system that encompasses our entire operation from order entry, to final inspection. Through Neway's continuous efforts, our products have achieved industrial certificates including ISO 9001, API 6A, API 6D, CE/PED, ASME N & NPT, TA-Luft, ABS, CU-TR and Fire-Safe approvals.

API 6D



API 6A



ISO 9001



TA Luft



ABS



AD2000



Fire Safe Test Certificate

Neway recognizes the importance of valve quality for the safety and protection of personnel health and property. It is our quality commitment to focus our resources to provide our customers with first class products at a competitive price, that are designed, manufactured, inspected and tested in accordance with our customer's specifications and that comply with all international standards.

With respect to the facts that the current industrial standards do not always take into consideration the likelihood and consequences of possible deterioration in service, related to specific service fluids or the external environment in which they operate. Our customers are requested to keep an open line of communication with our engineering department to identify and implement standards, that will provide valves with the possibility of deterioration in service, so as to ensure safety over the valves expected lifetime.

How to order

Example:



Neway part numbers are designed to cover essential features. When ordering, please show the part numbers and a detailed description to avoid misunderstanding of your requirements.

Following descriptions provide a basic guideline in valve specification:

① Nominal Diameter

Cryogenic Floating Ball Valve Series

Item	Class	Size
1	Class 150, 300	3/8"-8"
2	Class 600	3/8"-3"
3	Class 900, 1500	3/8"-2"

Cryogenic TM Ball Valve Series

Item	Class	Size
1	Class 150, 300	1/2"-40"
2	Class 600, 900	1/2"-24"
3	Class 1500	1/2"-16"

② Valve Types

Cryogenic Floating Ball Valve Series

Code	Type	Remark
BBG	2PC Forging Cryogenic Floating Ball Valve	Class 600 & above or size below 2"
BG	2PC Casting Cryogenic Floating Ball Valve	
BDG	Top Entry Cryogenic Floating Ball Valve	

Cryogenic TM Ball Valve Series

Code	Type	Remark
BSG	Forging Side Entry Cryogenic TM Ball Valve	
BEG	Top Entry Cryogenic TM Ball Valve	

③ ASME Class

Code	1	3	6	9	15
Class (LB)	150	300	600	900	1500

④ End Connection

Symbol	End	Symbol	End
R	Raised face flanged end	S	Socket weld end
J	RTJ flanged end	N	Screwed end
B	Butt-weld end		

⑤ Operator

Symbol	Description	Symbol	Description
	Lever	M	Electric actuator
G	Gear operator	P	Pneumatic actuator

⑥ Body Material

Code	S00	S01	S02	S03	S40
Material	CF8	CF8M	CF3	CF3M	F304
ASTM Ref	A351 Gr.CF8	A351 Gr.CF8M	A351 Gr.CF3	A351 Gr.CF3M	A182 Gr.F304

Code	S41	S42	S43	L02	L40
Material	F316	F304L	F316L	LC3	LF3
ASTM Ref	A182 Gr.F316	A182 Gr.F304L	A182 Gr.F316L	A352 Gr.LC3	A350 Gr.LF3

⑦ Trim Code


Cryogenic Floating Ball Valve


Seat		O-ring		Stem		Ball		Packing	
Code	Material	Code	Material	Code	Material	Code	Material	Code	Material
8	PCTFE	N	No O-rings	2	F304	2	F304	X	Low emission stuffing (GRAPHITE)
I	RPTFE			6	F316	6	F316		
3	PEEK			7	F304L	7	F304L		
G	VESPEL			8	F316L	8	F316L		
K	PAI			X	XM-19	X	XM-19		

Cryogenic TM Ball Valve

Seat		Seal ring		Stem		Ball		Seat retainer	
Code	Material	Code	Material	Code	Material	Code	Material	Code	Material
8	PCTFE	L	Spring seal structure	2	F304	2	F304	2	F304
3	PEEK			6	F316	6	F316	6	F316
I	RPTFE			7	F304L	7	F304L	7	F304L
				8	F316L	8	F316L	8	F316L
				X	XM-19	X	XM-19		

Note: Other materials upon request.

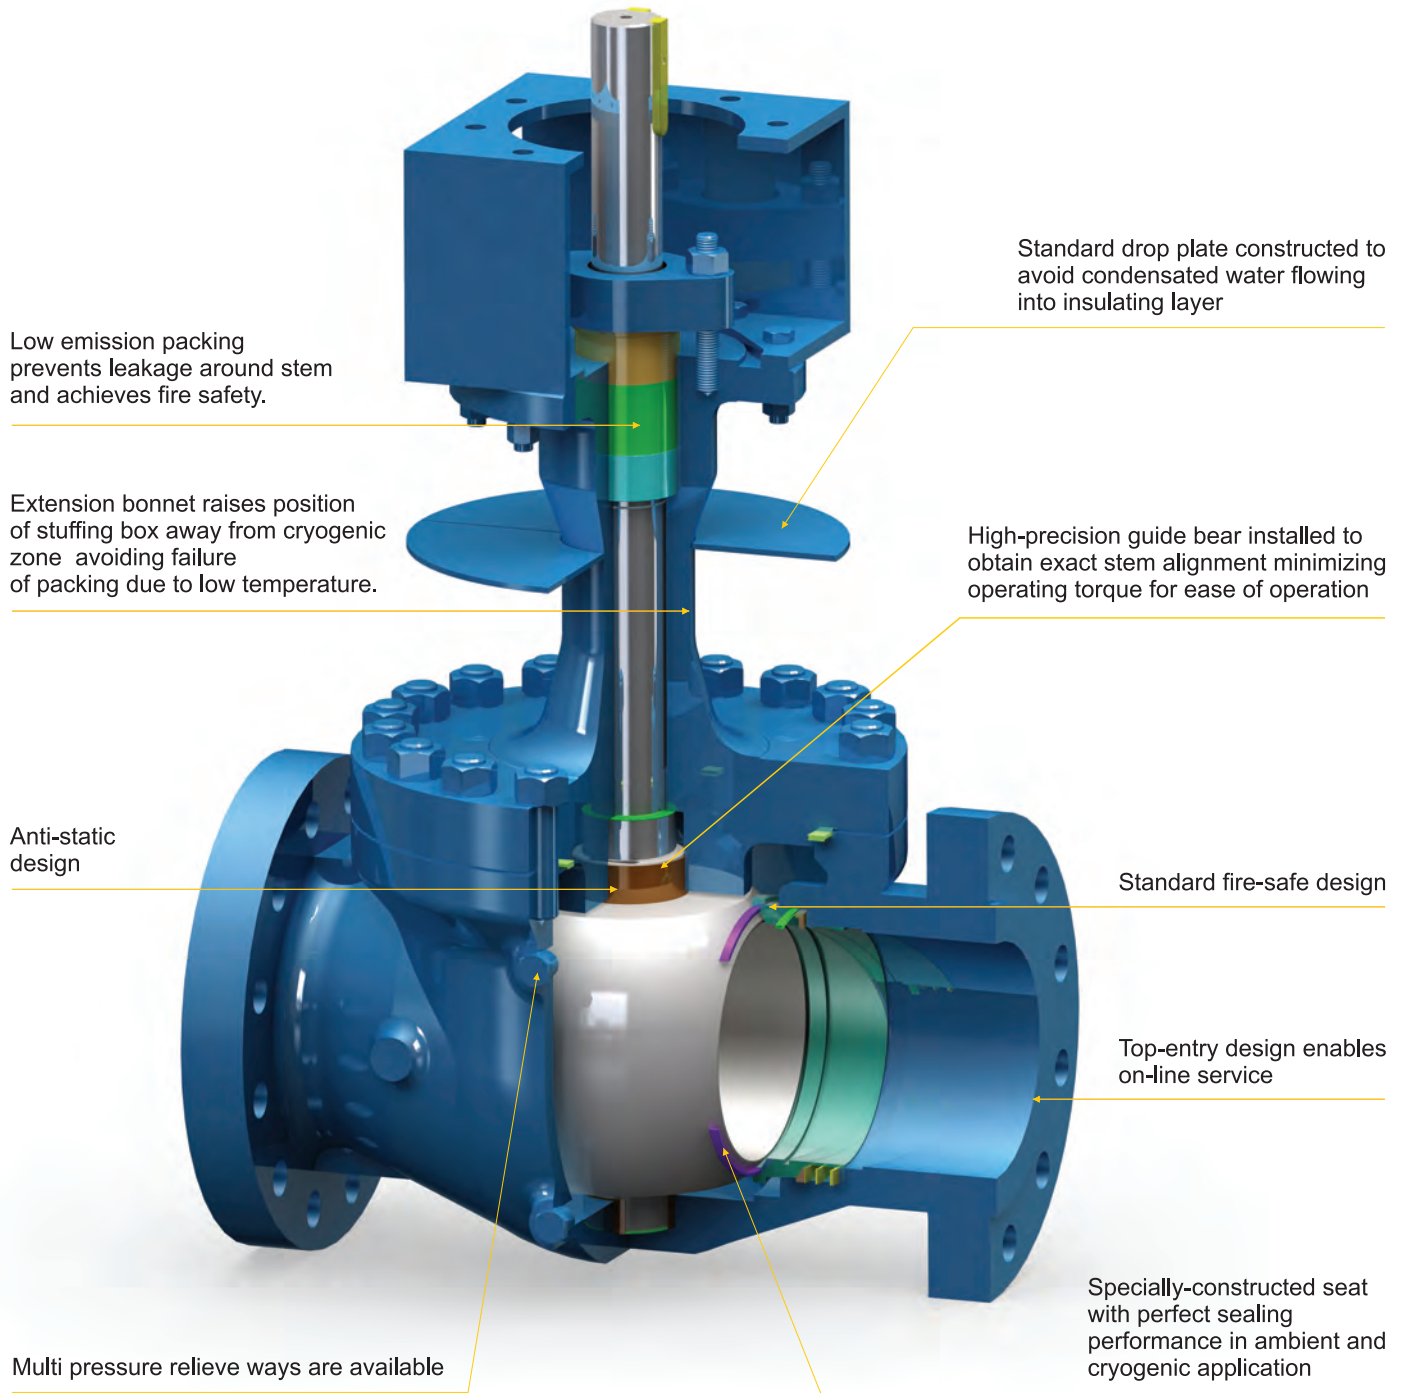

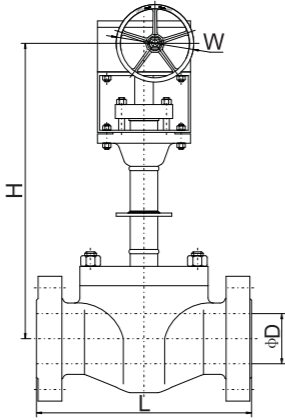


Class 150

Size		D		L		H		W		Weight	
NPS	DN	in	mm	in	mm	in	mm	in	mm	lb	kg
1/2	15	0.51	13	6.50	165	16.54	420*	13.78	350*	—	—
3/4	20	0.75	19	7.52	191	16.54	420*	13.78	350*	—	—
1	25	0.98	25	8.50	216	16.54	420*	13.78	350*	—	—
1-1/2	40	1.50	38	9.49	241	17.71	450	11.81	300	—	—
2	50	1.93	49	11.50	292	17.87	454	11.81	300	108.03	49
3	80	2.91	74	14.02	356	22.83	580	11.81	300	209.44	95
4	100	3.94	100	17.01	432	25.59	650	19.69	500	352.74	160
6	150	5.91	150	22.01	559	31.38	797	23.62	600	643.75	292
8	200	7.91	201	25.98	660	39.53	1004	23.62	600	1287.50	584
10	250	9.92	252	30.98	787	49.80	1265	23.62	600	1765.90	801
12	300	11.93	303	32.99	838	43.31	1100	23.62	600	2270.76	1030
14	350	13.15	334	35.00	889	46.85	1190	27.56	700	3384.09	1535
16	400	15.16	385	39.02	991	48.43	1230	29.92	760	4739.93	2150
18	450	17.17	436	42.99	1092	73.62	1870	31.50	800	5621.78	2550
20	500	19.17	487	47.01	1194	82.68	2100	35.43	900	8752.34	3970
22	550	21.18	538	50.98	1295	88.19	2240	35.43	900	12345.87	5600
24	600	23.19	589	55.00	1397	100.39	2550	35.43	900	15300.06	6940

Class 300

Size		D		L		H		W		Weight	
NPS	DN	in	mm	in	mm	in	mm	in	mm	lb	kg
1/2	15	0.51	13	6.50	165	16.54	420*	13.78	350*	—	—
3/4	20	0.75	19	7.52	191	16.54	420*	13.78	350*	—	—
1	25	0.98	25	8.50	216	16.54	420*	13.78	350*	—	—
1-1/2	40	1.50	38	9.49	241	17.71	450	11.81	300	—	—
2	50	1.93	49	11.50	292	17.87	454	11.81	300	114.64	52
3	80	2.91	74	14.02	356	22.83	580	11.81	300	216.05	98
4	100	3.94	100	17.01	432	25.59	650	19.69	500	371.48	168.5
6	150	5.91	150	22.01	559	31.38	797	23.62	600	679.02	308
8	200	7.91	201	25.98	660	39.53	1004	23.62	600	1358.05	616
10	250	9.92	252	30.98	787	49.80	1265	23.62	600	1862.90	845
12	300	11.93	303	32.99	838	43.31	1100	27.56	700	2689.64	1220
14	350	13.15	334	35.00	889	46.85	1190	29.92	760	3395.11	1540
16	400	15.16	385	39.02	991	48.43	1230	29.92	800	4761.98	2160
18	450	17.17	436	42.99	1092	73.62	1870	31.50	900	5643.83	2560
20	500	19.17	487	47.01	1194	82.68	2100	35.43	900	8774.39	3980
22	550	21.18	538	50.98	1295	88.19	2240	35.43	900	12367.92	5610
24	600	23.19	589	55.00	1397	100.39	2550	35.43	900	15300.06	6940

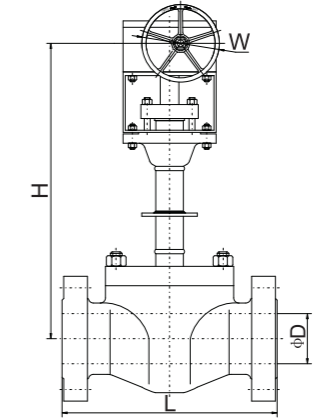

Class 600


Size		D		L		H		W		Weight	
NPS	DN	in	mm	in	mm	in	mm	in	mm	lb	kg
1/2	15	0.51	13	6.50	165	16.54	420*	13.78	350*	—	—
3/4	20	0.75	19	7.52	191	16.54	420*	13.78	350*	—	—
1	25	0.98	25	8.50	216	16.54	420*	13.78	350*	—	—
1-1/2	40	1.50	38	9.49	241	17.71	450	11.81	300	—	—
2	50	1.93	49	11.50	292	17.87	454	11.81	300	119.05	54
3	80	2.91	74	14.02	356	22.83	580	19.69	500	231.49	105
4	100	3.94	100	17.01	432	25.59	650	19.69	500	390.22	177
6	150	5.91	150	22.01	559	31.54	801	23.62	600	714.30	324
8	200	7.91	201	25.98	660	40.71	1034	23.62	600	1428.59	648
10	250	9.92	252	30.98	787	52.56	1335	29.92	760	1959.91	889
12	300	11.93	303	32.99	838	45.28	1150	29.92	760	3362.05	1525
14	350	13.15	334	35.00	889	48.03	1220	29.92	760	4100.59	1860
16	400	15.16	385	39.02	991	49.80	1265	29.92	760	4784.03	2170
18	450	17.17	436	42.99	1092	74.80	1900	31.50	800	5665.87	2570
20	500	19.17	487	47.01	1194	83.46	2120	35.43	900	8787.41	3985
22	550	21.18	538	50.98	1295	89.37	2270	35.43	900	12389.96	5620
24	600	23.19	589	55.00	1397	101.57	2580	35.43	900	15322.11	6950

Class 900

Size		D		L		H		W		Weight	
NPS	DN	in	mm	in	mm	in	mm	in	mm	lb	kg
1/2	15	0.51	13	8.50	216	17.32	440	7.87	200	—	—
3/4	20	0.75	19	9.02	229	17.32	440	7.87	200	—	—
1	25	0.98	25	10.00	254	17.32	440	7.87	200	—	—
1-1/2	40	1.50	38	12.01	305	18.90	480	11.81	300	—	—
2	50	1.93	49	14.49	368	20.47	520	19.69	500	—	—
3	80	2.91	74	15.00	381	22.83	580	19.69	500	—	—
4	100	3.94	100	17.99	457	25.59	650	23.62	600	—	—
6	150	5.91	150	24.02	610	28.74	730	23.62	600	—	—
8	200	7.91	201	29.02	737	31.89	810	29.92	760	—	—
10	250	9.92	252	32.99	838	35.83	910	29.92	760	—	—
12	300	11.93	303	37.99	965	39.37	1000	31.50	800	—	—
14	350	12.68	322	40.51	1029	44.49	1130	31.50	800	—	—
16	400	14.69	373	44.49	1130	49.61	1260	31.50	800	—	—

Class 1500

Size		D		L		H		W		Weight	
NPS	DN	in	mm	in	mm	in	mm	in	mm	lb	kg
1/2	15	0.51	13	8.50	216	19.69	500	11.81	300	—	—
3/4	20	0.75	19	9.02	229	19.69	500	11.81	300	—	—
1	25	0.98	25	10.00	254	19.69	500	11.81	300	—	—
1-1/2	40	1.50	38	12.01	305	21.65	550	19.69	500	—	—
2	50	1.93	49	14.49	368	23.62	600	23.62	600	—	—
3	80	2.91	74	18.50	470	25.59	650	19.69	500	—	—
4	100	3.94	100	21.50	546	27.56	700	23.62	600	—	—
6	150	5.67	144	27.76	705	33.46	850	23.62	600	—	—
8	200	7.56	192	32.76	832	39.37	1000	29.92	760	—	—
10	250	9.41	239	39.02	991	50.79	1290	29.92	760	—	—
12	300	11.30	287	44.49	1130	53.15	1350	35.43	900	—	—
14	350	12.40	315	49.49	1257	59.06	1500	35.43	900	—	—
16	400	14.17	360	54.49	1384	66.54	1690	35.43	900	—	—

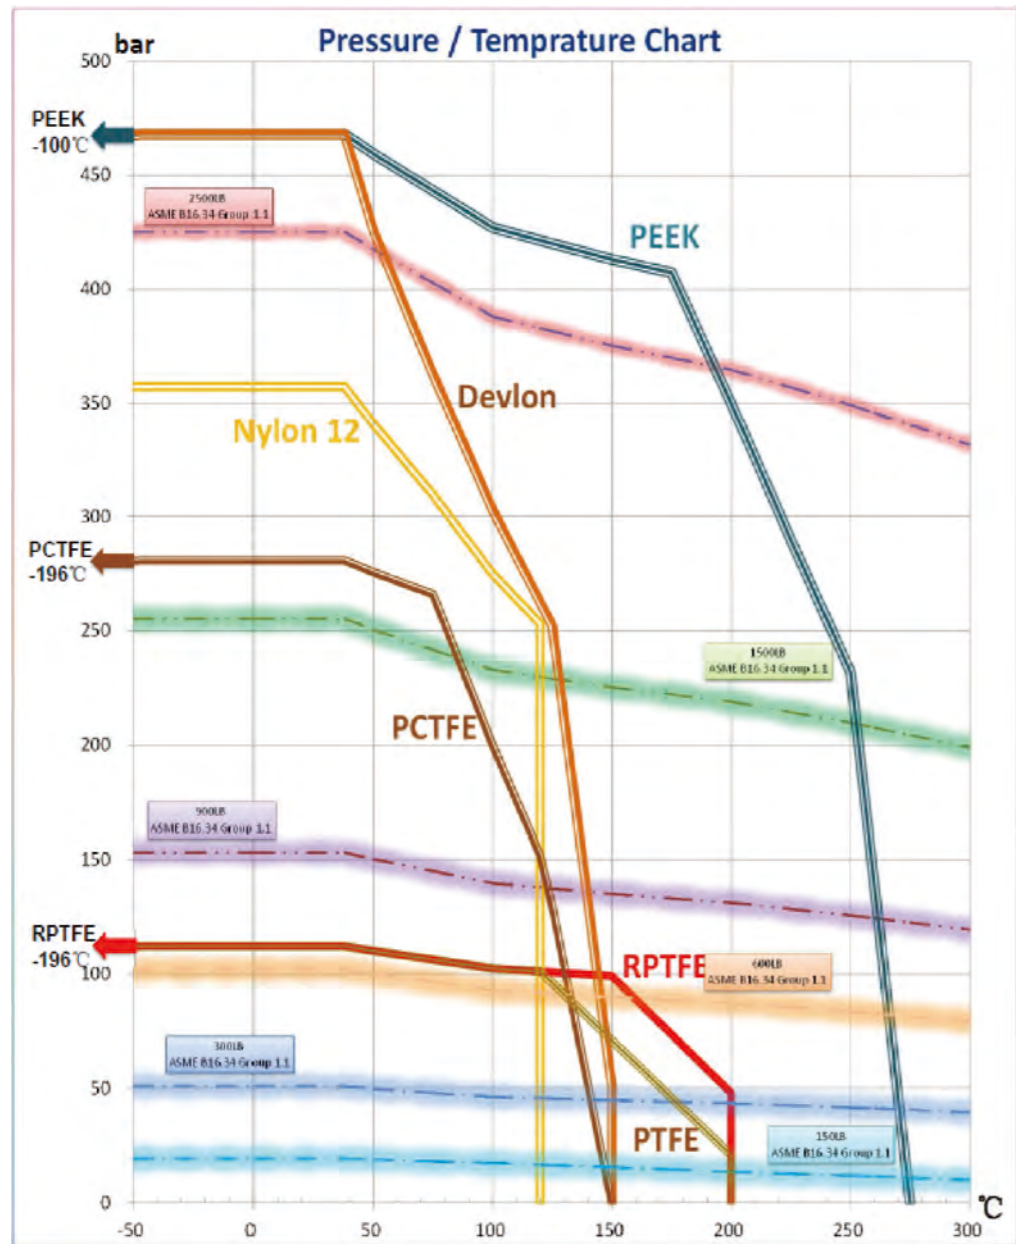

PEEK:	Devlon:	2500LB ASME B16.34 Group 1.1
Nylon 12:	PCTFE:	1500LB ASME B16.34 Group 1.1
RPTFE:	PTFE:	900LB ASME B16.34 Group 1.1
600LB ASME B16.34 Group 1.1	300LB ASME B16.34 Group 1.1	150LB ASME B16.34 Group 1.1

Note: Other materials are available upon request.
If the operating condition is beyond the range above, please contact NEWAY's technical team.
NEWAY reserves the right to update without notice.

Seat

Properties		PCTFE	PTFE	PEEK
Temperature Range °F		-328~302	-328~392	-148~500
Temperature Range °C		-200~150	-200~200	-100~260
Pressure Rating--LB		150~1500	150~600	150~2500
Mechanical Property	Hardness (D)	75~85	55~60	≥82
	Tensile Strength(MPa)	31.4~37.2	28~40	≥95
	Tensile Elongation(Break,%)	50~200	>350	≥55
Physical Property	Specific Gravity (g/cm3)	2.11~2.16	2.16~2.18	1.3~1.4
	Water Absorption 24hrs(%)	0.00	0.00	0.2
	Water Absorption Saturation	<0.01	<0.01	0.5
Service Application		Cryogenic & Low Temperature	Chemical & Low Temperature	High Pressure & Temperature

Seal Ring

Type	Spring Seal Structure
Temperature Range °F	-425~600
Temperature Range °C	-254~316
Pressure Rating--LB	150~1500
Size--inch	1/2"~78"

Flow Coefficient (Cv Value)

Size (inch)	Class 150	Class 300	Class 600	Class 900	Class 1500
1/2	17	15	14	12	12
3/4	43	38	34	31	31
1	86	76	66	61	61
1-1/2	227	211	187	167	167
2	423	384	330	294	294
3	1139	965	860	832	749
4	2416	2093	1759	1710	1564
6	5241	5183	4400	4212	3918
8	10471	9991	8713	8245	6921
10	17709	17154	14573	14123	11376
12	26241	25460	22389	20864	16835
14	32857	31176	28863	24483	20967
16	44474	42409	38998	33741	27901
18	57002	55420	50703	44491	35761
20	73076	70180	63936	55915	45445
22	88907	85757	78750	—	—
24	113639	109796	99314	—	—

Notes:

- All the sizes are of full port.
 - Pressure Ratings are according to B 16.34.
 - Method of Calculating Flow
- The Flow Coefficient Cv of a valve is the flow rate of water (gallons/minute) through a fully opened valve, with a pressure drop of 1 psi across the valve. To find the flow of liquid through the valve from the Cv, use the following formulas:
- Liquid Flow: $QL = Cv (P/G)^{1/2}$
 Gas Flow: $Qg = 61Cv (P_2/P_1)^{1/2}$
 (For non-critical flow, $P_2/P_1 < 1.0$)
 QL = Flow rate of liquid (gal. /min.)
 P = differential pressure across the valve
 G = specific gravity of liquid (for water, G=1)
 Qg = Flow rate of gas (CFH at STP)
 P₂ = outlet pressure (psia)
 g = specific gravity of gas (for air, g=1.0)

Floating Ball Operating Torque

inch	Class 150		Class 300		Class 600		Class 900		Class 1500	
	N.m	lbf.ft	N.m	lbf.ft	N.m	lbf.ft	N.m	lbf.ft	N.m	lbf.ft
3/8	20	14.76	30	22.14	40	29.52	50	36.90	65	47.97
1/2	20	14.76	30	22.14	40	29.52	50	36.90	65	47.97
3/4	35	25.82	45	33.21	60	44.26	119	87.83	192	141.71
1	45	33.21	65	47.97	120	88.57	173	127.68	277	204.44
1-1/2	80	59.04	130	95.95	280	206.52	347	256.11	556	410.36
2	120	88.57	225	166.06	490	361.41	581	428.81	928	684.92
3	245	180.83	320	236.02	830	612.18				
4	450	331.91	705	519.99						
6	1350	995.71	2100	1548.88						
8	2240	1652.14	5100	3761.57						

Note:
 The seat material is PCTFE
 This torque is the max. operating torque in the cryogenic condition.

Trunnion-mounted Ball Valve Operating Torque

inch	Class 150		Class 300		Class 600		Class 900	
	N.m	lbf.ft	N.m	lbf.ft	N.m	lbf.ft	N.m	lbf.ft
2	162	119.57	219	161.64	308	227.32	420	309.99
3	604	445.79	732	540.26	1061	783.08	1355	999.79
4	686	506.31	904	667.21	1379	1017.79	1884	1390.22
6	1466	1082.00	1989	1468.01	3082	2274.71	4269	3150.76
8	2738	2020.81	4257	3141.93	7129	5261.64	10518	7763.28
10	3836	2831.21	6007	4433.54	10438	7703.89	15624	11531.61
12	5800	4280.76	9287	6854.38	15672	11566.91	23612	17426.86
14	6579	4855.71	11120	8207.25	21777	16072.77	32053	23657.44
16	9788	7224.15	15907	11740.35	28411	20969.08	42408	31299.98
18	13185	9731.48	19285	14233.52	33750	24909.59		
20	14481	10688.23	26600	19632.45	40000	29522.47		
22	17037	12574.39	32900	24282.23	43750	32290.21		
24	21000	15499.30	43050	31773.56	48750	35980.52		

Note:
 The seat material is PCTFE
 This torque is the max. operating torque in the cryogenic condition.

Seller will replace without charge or refund the purchase price of products provided by Seller which prove to be defective in material or workmanship, provided in each case that the product is properly installed and is used in the service for which Seller recommends it and that written claim, specifying the alleged defect, is presented to the Seller within 18 months from the date of shipment or 12 months after installation, whichever occurs first. Seller shall in no event bear any labor, equipment, engineering or other costs incurred in connection with repair or replacement. The warranty stated in this paragraph is in lieu of all other warranties, either expressed or implied. With respect to warranties, this paragraph states Buyer's exclusive remedy and seller's exclusive liability.