


standard features

- **Description** BOLTED BONNET
OUTSIDE SCREW AND YOKE
RISING STEM
RISING HANDWHEEL
LOOSE DISC
- **Design** EN 12516
- **Face to face** EN 12982
EN 558
- **Flanges** EN 12627
EN 1092
BW TO DIN 3239
- **Testing** EN 12266
- **Rating** EN 1092
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 / 3.2

PART NAME	FH1430EB - FH1560EB - FH1570EB
1 Body	1.4552
2 Bonnet	1.4552
3 Seat (integral)	1.4552 (1)
4 Disc	X5CrNiMo17-12-2 (1)
5 Stem	X5CrNiMo17-12-2 (2)
6 Back seat (integral)	1.4552
7 Gland	X5CrNiMo17-12-2
8 Yoke sleeve	MS58 (3)
9 Handwheel	Steel
10 Plate	1.0460
11 Handwheel nut	X5CrNiMo17-12-2
12 Bolts	A2-70
13 Nuts	A2-70
14 Eye bolts	A2-70
15 Nuts	A2-70
16 Eye bolt pin	A2-70
17 Gasket	S. S. reinforced graphite (4)
18 Packing	Graphite rings & wiper rings (4)
19 Extension	X2CrNiMo17-12-2

(1) On request: faced with Stellite® - Monel® - Hastelloy® - other materials
(2) On request: 17 Cr - Monel® - Hastelloy® - other materials

options

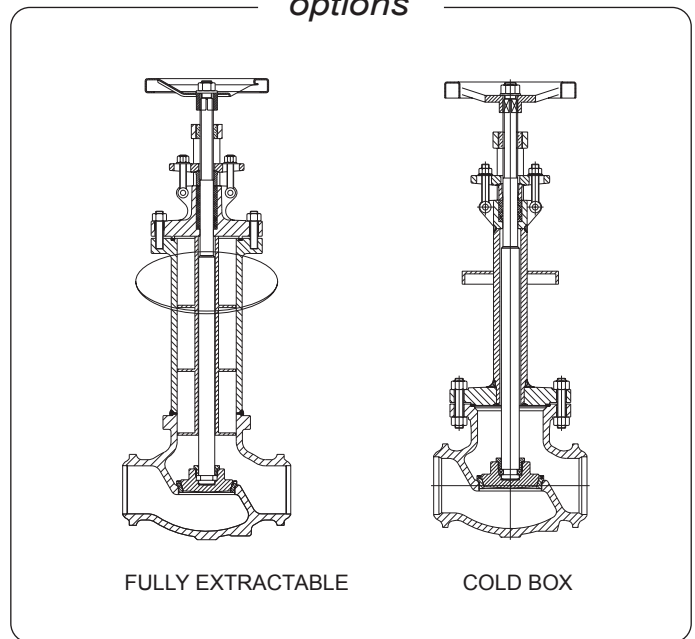

(3) On request: GGG50
(4) On request: PTFE - other materials

All data, subject to technical changes, are only for information and not for official use.

FIG. 1430EB - CRYOGENIC GLOBE VALVES - DIN PN 25 / 40 - F1

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600
L RF/BW	130	150	160	180	200	230	290	310	350	400	480	550	600	730	850	980	1100	1200	1250	1450
D - PN25	95	105	115	140	150	165	185	200	235	270	300	330	360	425	485	555	620	670	730	845
D - PN40	95	105	115	140	150	165	185	200	235	270	300	350	375	450	515	580	660	685	755	890
V	100	100	125	125	150	200	200	200	250	250	500	500	600	600	700	700	700	700	700	800
W	200	200	200	200	200	200	200	300	300	300	300	300	300	300	300	300	300	300	300	300
H	565	570	595	605	630	665	685	825	880	920	1070	1160	1180	1360	1510	1650	1900	2010	2210	2750
H1	569	575	602	613	640	678	702	845	905	952	1108	1204	1230	1423	1585	1738	2000	2123	2335	--

FIG. 1560EB - CRYOGENIC GLOBE VALVES - DIN PN 63 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	500	600	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	1025	1150	1400	1600	--
D	105	130	140	155	170	180	205	215	250	295	345	375	415	470	530	600	670	800	930	--
V	200	200	200	220	220	250	225	400	400	500	600	600	600	700	700	800	800	1000	1200	--
W	200	200	200	200	200	200	200	300	300	300	300	300	300	300	300	300	300	300	300	--
H	655	715	715	735	755	785	815	965	995	1055	1220	1310	1360	1410	1540	--	--	--	--	--
H1	659	720	722	743	765	798	832	985	1020	1087	1258	1354	1410	1473	1615	--	--	--	--	--

FIG. 1570EB - CRYOGENIC GLOBE VALVES - DIN PN 100 - F2

SIZE DN	15	20	25	32	40	50	65	80	100	125	150	175	200	250	300	--	--	--	--	--
L RF/BW	210	230	230	260	260	300	340	380	430	500	550	600	650	775	900	--	--	--	--	--
D	105	130	140	155	170	195	220	230	265	315	355	385	430	505	585	--	--	--	--	--
V	200	200	200	225	225	250	300	400	400	500	700	700	700	700	700	--	--	--	--	--
W	200	200	200	200	200	200	200	300	300	300	300	300	300	300	300	--	--	--	--	--
H	655	715	715	735	755	805	885	1015	1085	1105	1240	1330	1390	1440	1580	--	--	--	--	--
H1	659	720	722	743	765	818	902	1035	1110	1137	1278	1374	1440	1503	1655	--	--	--	--	--

features on request

- TOP FLANGE TO ISO 5210
- GEAR OPERATOR
- CHAIN WHEEL OPERATOR
- PNEUMATIC ACTUATOR
- HYDRAULIC ACTUATOR
- ELECTRIC ACTUATOR
- POSITION INDICATOR
- LIMIT SWITCHES
- LOCKING / INTERLOCK SYSTEM
- PTFE SOFT SEATS
- STEM PROTECTION / EXTENSION
- REGULATING DISC
- DOUBLE STAGE DISC
- STOP CHECK DISC
- LIVE LOADED PACKING
- DRAIN PLUG
- BW ENDS
- ANSI CONNECTIONS

All dimensions in mm (except where differently indicated)

All data, subject to technical changes, are only for information and not for official use.