

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA



FEATURES

- Direct mounting to all Keystone butterfly valves and ball valves.
- Valve connection compatible with Keystone (imperial and metric) and ISO 5211.
- Double Rack and Pinion design nullifies side loads on the pinion shaft, minimizing bearing wear and extending life.
- Optimized product flow with standard mounted travel stops for valve position adjustment in open and close position (+/- 5° at each end).
- Anodized aluminium body with electrostatic powder coating (ESPC) finish provides durable protection against corrosive environments.
- Double acting and spring return versions available for cost effective and safe operation.
- Up to 12 individual springs offer flexible torque range for both ball as butterfly valves.
- Pre-compressed spring design and anti-blowout drive pinion means safe maintenance and operation.

MATERIALS

Body: Extruded aluminium (ESPC coated)
End caps: Cast aluminium (ESPC coated)

MOUNTING SPECIFICATIONS

Actuator to valve: ISO and Keystone standard
Accessories: Namur VDI/VDE 3845

PERFORMANCE DATA

The F89 actuator meets the EN15714-3 requirements and has been validated for a lifetime up to 500,000 cycles under the specified conditions.

TECHNICAL DATA

Torque output range:
Double acting: 11 - 4173 Nm [97 - 36955 in·lb]
Spring return: 6 - 1663 Nm [51 - 14729 in·lb]
Operating medium: Compressed air
[dry or lubricated]
Air supply pressure: 8.3 bar [120 psi] max. dynamic
10 bar [145 psi] max. static
Travel adjustment: +/- 5° at each end of travel
0-100% travel stop
available on request
Temperature range: -20°C to +80°C
(-4°F to +176°F)
Low temp version: -52°C to +65°C
(-62°F to +149°F)
High temp version: -15°C to +150°C
(5°F to +302°F)
Certification: ATEX II 2G Ex h IIC T80°C Gb
ATEX II 2D Ex h IIIC T80°C Db

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA

PRINCIPLE OF OPERATION


Both the double acting and spring return actuators feature a compact design each with their own set of end caps. The unit can be converted from double acting to single acting (or reverse) in the field without the requirement of special tools. The spring return actuator is available with spring sets representing 2.8 bar (40 psi) to 8.3 bar (120 psi) in 0.7 bar (10 psi) increments. The springs are manufactured from heavy gauge wire to assure long life and ESPC coated for corrosion resistance. They are pre-compressed using a special container to ensure safe operation and maintenance.

The dual-keyed output shaft allows parallel or perpendicular mounting to the valve flow direction. In normal conditions the actuator is mounted in parallel with the valve flow direction, operating in a counter clockwise (CCW) rotation from the closed to the open position.

DOUBLE ACTING


To open valve

In a double acting application, air pressure is introduced to Port 2 (A), pressurizing the space between the pistons and driving the pistons out towards the actuator ends. The volume of air above the piston heads is exhausted to atmosphere. This causes the piston racks to drive the pinion in a counterclockwise direction, resulting in a quarterturn rotation. This rotation is transferred to the valve shaft, opening the valve.



To close valve


Air pressure introduced to Port 4 (B), pressurizes the spaces above each piston head and drives the pistons inward. The volume of air between the pistons is exhausted to atmosphere. This causes the piston racks to drive the pinion in a clockwise direction, resulting in a quarter-turn rotation. This rotation is transferred to the valve shaft, closing the valve.



SPRING RETURN


To open valve

In a single acting application, air pressure is introduced to Port 2 (A), pressurizing the space between the pistons and driving the pistons out towards the actuator ends while at the same time compressing the springs. This causes the piston racks to drive the pinion in a counterclockwise direction, resulting in a quarter-turn rotation. This rotation is transferred to the valve shaft, opening the valve.

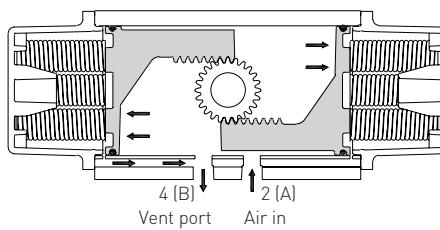

To close valve

When the air pressure is relieved, the spring tension moves the pistons inward and exhausts the air through Port 2 (A). This causes the piston racks to drive the pinion in a clockwise direction, resulting in a quarter-turn rotation. This rotation is transferred to the valve shaft, closing the valve.

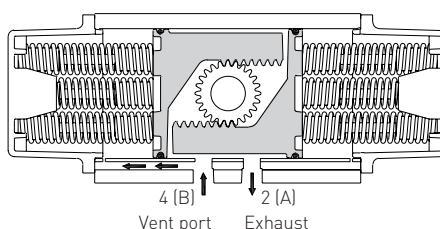


KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA


TRAVEL ADJUSTMENT

Within the mechanical connections of the drive between the valve and the actuator there are several points of manufacturing tolerance, including valve disc or ball to stem, stem to adapter, and adapter to actuator that must be compensated for in the operation of the assembly. Therefore, adjustment is necessary to ensure that valve operation is as precise as required. The F89 dual travel stops allow +/- 5° adjustment at both ends of the stroke, resulting in a total stroke range of 80° to 100° rotation. For special applications an optional linear travel stop is available, which reduces the stroke from 0-100%.




Resilient seated butterfly valves

Shut-off occurs before the disc has rotated a full 90° from the open position. Travel adjustment is therefore desirable to prevent over travel, which would result in unnecessary operating torque and premature deterioration of seat life. In the open position, adjustment is necessary to ensure maximum flow through the valve and minimum dynamic forces acting on the disc.




High performance butterfly valves

The double offset design of high performance butterfly valves results in the disc moving into the seat with a camming action. It is important that the disc does not travel beyond the seat position, otherwise damage to the seat will occur.



Ball and plug valves

The ball or plug must be precisely in line with the valve port to prevent damage to the seat in the open position. Adjustment at the closed position is necessary to ensure that complete shut-off is achieved.




KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR


GENERAL PURPOSE / HAZARDOUS AREA

DIMENSIONS


Top view model 002 – 020

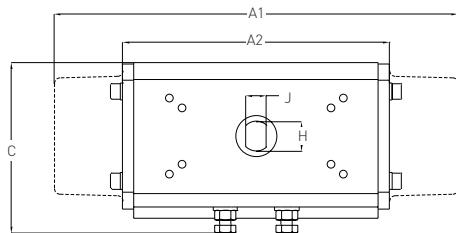

Top view model 032 – 240

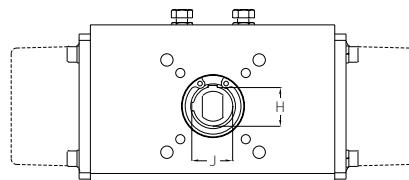

Side view



Front view

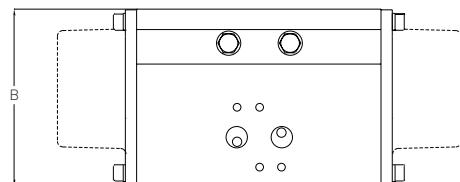


TABLE 1 - DIMENSIONS F89 METRIC (mm)

Model	A1 ⁽¹⁾	A2 ⁽¹⁾	B	C	D	E	Top of shaft ⁽²⁾		
							H	J	Key
F89-002	-	121	72	74	54	66	16.0	11.0	
F89-003	186	125	86	81	59	79	16.0	11.0	
F89-004	217	143	96	91	61	80	16.0	11.0	
F89-006	259	169	101	108	64	87	16.0	11.0	
F89-009	257	174	119	124	64	99	16.0	11.0	
F89-014	307	193	138	141	78	112	16.0	11.0	
F89-020	378	236	155	157	81	123	16.0	11.0	
F89-032/033	462	283	171	182	95	136	20.6	21.6	4.8
F89-051/052	476	298	213	210	111	159	20.6	21.6	4.8
F89-084/085/086	627	384	227	233	130	190	25.4	27.0	6.4
F89-139/140/141	726	431	274	288	154	233	25.4	27.0	6.4
F89-240	845	507	325	341	186	290	25.4	27.0	6.4

TABLE 2 - DIMENSIONS F89 IMPERIAL (in)

Model	A1 ⁽¹⁾	A2 ⁽¹⁾	B	C	D	E	Top of shaft ⁽²⁾		
							H	J	Key
F89-002	-	4.76	2.83	2.91	2.13	2.60	5/8	7/16	
F89-003	7.30	4.90	3.39	3.18	2.32	3.09	5/8	7/16	
F89-004	8.53	5.63	3.78	3.60	2.40	3.15	5/8	7/16	
F89-006	10.20	6.65	3.97	4.26	2.52	3.42	5/8	7/16	
F89-009	10.10	6.85	4.69	4.87	2.52	3.91	5/8	7/16	
F89-014	12.07	7.60	5.42	5.55	3.07	4.41	5/8	7/16	
F89-020	14.89	9.29	6.10	6.20	3.19	4.82	5/8	7/16	
F89-032/033	18.20	11.14	6.73	7.18	3.74	5.35	0.81	0.84	0.19
F89-051/052	18.72	11.73	8.37	8.25	4.37	6.26	0.81	0.84	0.19
F89-084/085/086	24.69	15.12	8.94	9.17	5.12	7.48	1.00	1.06	0.25
F89-139/140/141	28.58	16.97	10.79	11.34	6.06	9.17	1.00	1.06	0.25
F89-240	33.27	19.96	12.80	13.43	7.32	11.42	1.00	1.06	0.25

NOTES


- A1 = spring return; A2 = double acting
 - All actuators have either DD 16.0 x 7/16 [DD 5/8 x 7/16] top shaft connection or a plastic insert to this dimension, for direct mounting of switchbox accessories.
- Indicated values are actual pinion top dimensions.

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR


GENERAL PURPOSE / HAZARDOUS AREA

DIMENSIONS

Pinion connection F89E sizes 002-020

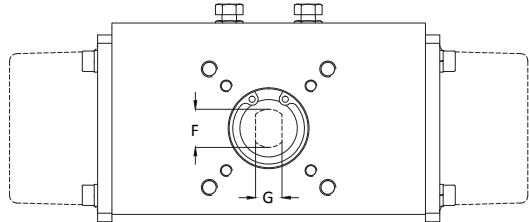

Pinion connection F89E sizes 032-240

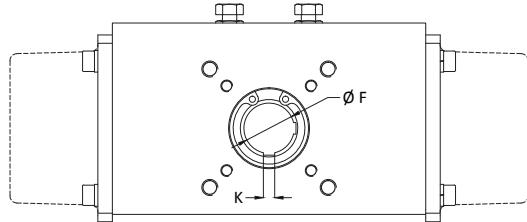

The F89 actuator is available with 4 different valve connections: F89D - ISO 5211 (metric threaded); F89E - Keystone ISO (metric threaded); F89U - Keystone imperial + metric threaded

TABLE 3A - VALVE CONNECTION ISO FLANGE (mm)

Model	F89E - Keystone ISO			F89D - ISO 5211				
	F	G	Key	PCD	Mounting holes No x Size x Depth	Bottom of shaft Drive: Star no	PCD	Mounting holes No x Size x Depth
F89-002	16.0	11.0		F03	4x M5 x 8.0	**	F03	4x M5 x 8.0
				F05	4x M6 x 10.0		F05	4x M6 x 10.0
F89-003	16.0	11.0		F05	4x M6 x 10.0	14	F05	4x M6 x 10.0
				F07	4x M8 x 13.0		F07	4x M8 x 13.0
F89-004	16.0	11.0		F05	4x M6 x 10.0	14	F05	4x M6 x 10.0
				F07	4x M8 x 13.0		F07	4x M8 x 13.0
F89-006	20.0	14.0		F05	4x M6 x 10.0	17	F05	4x M6 x 10.0
				F07	4x M8 x 13.0		F07	4x M8 x 13.0
F89-009	20.0	14.0		F05	4x M6 x 10.0	17	F05	4x M6 x 10.0
				F07	4x M8 x 13.0		F07	4x M8 x 13.0
F89-014	20.0	14.0		F07	4x M8 x 13.0	17	F07	4x M8 x 13.0
				F07	4x M8 x 13.0		F07	4x M8 x 13.0
F89-020	25.0	18.0		F10	4x M10 x 15.0	22	F10	4x M10 x 15.0
				F12	4x M12 x 19.0		F12	4x M12 x 19.0
F89-032	35.0	10 x 8		F10	4x M10 x 15.0	27	F10	4x M10 x 15.0
				F12	4x M12 x 19.0		F12	4x M12 x 19.0
F89-052	35.0	10 x 8		F10	4x M10 x 15.0	27	F10	4x M10 x 15.0
				F12	4x M12 x 19.0		F12	4x M12 x 19.0
F89-084*	50.0	14 x 9		F10	4x M10 x 15.0	36	F10	4x M10 x 15.0
				F14	4x M16 x 24.0		F14	4x M16 x 24.0
F89-085	50.0	14 x 9		F12	4x M12 x 19.0	36	F12	4x M12 x 19.0
				F16	4x M20 x 30.0		F16	4x M20 x 30.0
F89-139	45.0	14 x 9		F14	4x M16 x 24.0			
F89-140	50.0	14 x 9		F14	4x M16 x 24.0	46	F14	4x M16 x 24.0
F89-141	50.0	14 x 9		F12	4x M12 x 19.0	46	F12	4x M12 x 19.0
				F16	4x M20 x 30.0		F16	4x M20 x 30.0
F89-240	70.0	20 x 12		F16	4x M20 x 30.0	46	F16	4x M20 x 30.0
				F25	8x M16 x 24.0		F25	8x M16 x 24.0

NOTES

F89-084 is identical to F89-085 with F10-F14 flange

F89-140 is identical to F89-141 with F14 flange

* F89-084: F10 drilling not in body; please use optional F10 to F14 conversion plate


** Square 14 at 45 degrees

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA

DIMENSIONS

Pinion connection F89U sizes 002-003

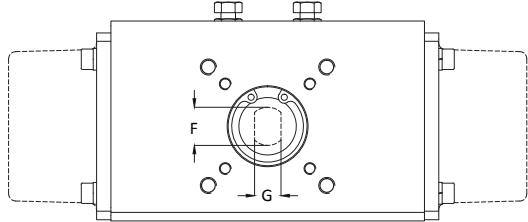

Pinion connection F89U sizes 004-240

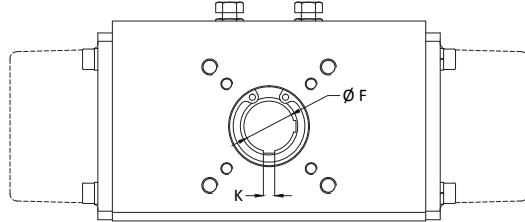


TABLE 3B - VALVE CONNECTION KEYSTONE FLANGE

Model	F89U - Keystone metric (mm)				F89U - Keystone imperial (in)				Code*	
	F	G	Key	PCD	Mounting holes No x Size x Depth	F	G	Key	PCD	
F89-002	**			44.5	4x M6 x 8.0	***			1 1/4	4x 1/4-20 UNC x 0.38
F89-003	19.0	12.7		44.5	4x M6 x 10.0	3/4	1/2		1 1/4	4x 1/4-20 UNC x 0.38
				82.5	4x M10 x 15.0				3 1/4	4x 3/8-16 UNC x 0.56
F89-004	20.6	4.8 x 4.8		44.5	4x M6 x 10.0	13/16	3/16 x 3/16		1 1/4	4x 1/4-20 UNC x 0.38
				82.5	4x M10 x 15.0				3 1/4	4x 3/8-16 UNC x 0.56
F89-006	25.4	6.4 x 6.4		82.5	4x M10 x 15.0	1	1/4 x 1/4		3 1/4	4x 3/8-16 UNC x 0.56
F89-009	25.4	6.4 x 6.4		82.5	4x M10 x 15.0	1	1/4 x 1/4		3 1/4	4x 3/8-16 UNC x 0.56
F89-014	25.4	6.4 x 6.4		82.5	4x M10 x 15.0	1	1/4 x 1/4		3 1/4	4x 3/8-16 UNC x 0.56
F89-020	28.6	6.4 x 6.4		82.5	4x M10 x 15.0	1 1/8	1/4 x 1/4		3 1/4	4x 3/8-16 UNC x 0.56
				127.0	4x M12 x 19.0				5	4x 1/2-13 UNC x 0.63
F89-032	28.6	6.4 x 6.4		82.5	4x M10 x 15.0	1 1/8	1/4 x 1/4		3 1/4	4x 3/8-16 UNC x 0.56
				127.0	4x M12 x 19.0				5	4x 1/2-13 UNC x 0.63
F89-033	34.9	7.9 x 7.9		82.5	4x M10 x 15.0	1 5/8	5/16 x 5/16		3 1/4	4x 3/8-16 UNC x 0.56
				127.0	4x M12 x 19.0				5	4x 1/2-13 UNC x 0.63
F89-051	28.6	6.4 x 6.4		82.5	4x M10 x 15.0	1 1/8	1/4 x 1/4		3 1/4	4x 3/8-16 UNC x 0.56
				127.0	4x M12 x 19.0				5	4x 1/2-13 UNC x 0.63
F89-052	34.9	7.9 x 7.9		82.5	4x M10 x 15.0	1 5/8	5/16 x 5/16		3 1/4	4x 3/8-16 UNC x 0.56
				127.0	4x M12 x 19.0				5	4x 1/2-13 UNC x 0.63
F89-085	41.3	9.5 x 9.5		127.0	4x M12 x 19.0	1 5/8	3/8 x 3/8		5	4x 1/2-13 UNC x 0.63
				165.0	4x M20 x 30.0				6 1/2	4x 3/4-10 UNC x 1.00
F89-086	47.6	12.7 x 9.5		127.0	4x M12 x 19.0	1 7/8	1/2 x 3/8		5	4x 1/2-13 UNC x 0.63
				165.0	4x M20 x 30.0				6 1/2	4x 3/4-10 UNC x 1.00
F89-140	57.2	12.7 x 9.5		127.0	4x M12 x 19.0	2 1/4	1/2 x 3/8		5	4x 1/2-13 UNC x 0.63
				165.0	4x M20 x 30.0				6 1/2	4x 3/4-10 UNC x 1.00
F89-240	57.2	12.7 x 9.5		165.0	4x M20 x 30.0	2 1/4	1/2 x 3/8		6 1/2	4x 3/4-10 UNC x 1.00

NOTES

F89-033 is identical to F89-032 with larger bore

F89-051 is identical to F89-052 with smaller bore

F89-084 is identical to F89-085 with smaller bore

F89-086 is identical to F89-085 with larger bore

* Keystone mounting compatibility code

** Square 14 at 45 degrees


*** Square 0.55 at 45 degrees

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA

TOP MOUNT DRILLING

The top mount drilling is available with metric or imperial threading. The dimensions of the hole pattern are identical.

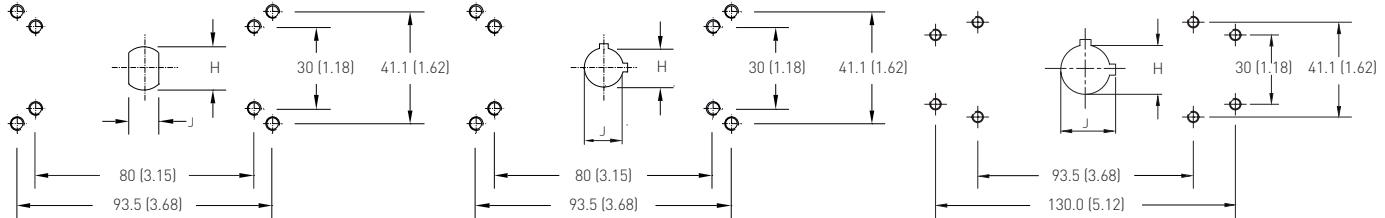

Top mounting drilling sizes 002 - 020

Top mounting drilling sizes 032 - 052


Top mounting drilling sizes 084 - 240

NOTES

- For model 002/003 the Keystone drilling pattern (93.5x41.1mm) exceeds the body dimensions. Please add Keystone mounting plate option (item 11425095).
- Metric threaded versions have a bolt threading of M5x1.0 x 10.0 mm deep.
- Imperial threaded versions have a bolt threading of 10-32 UNF x 0.28 inch deep.


NAMUR VDI/VDE 3845 MOUNTING

Full adoption to the VDI/VDE 3845 standard can be achieved with the introduction of a male insert into the female shaft.

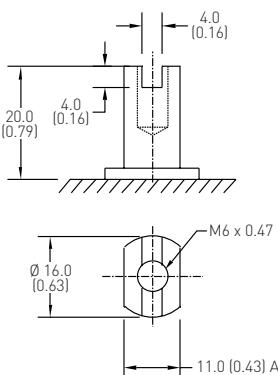


AIR CONNECTION


The actuator is controlled by applying compressed air to the $\frac{1}{4}$ " BSP/NPT ports ($\frac{1}{2}$ " BSP/NPT for Model F89-240), or with a Namur solenoid valve.



Air connection sizes 002 - 052



Air connection sizes 085 - 140



Air connection size 240

NOTES

- Metric threaded versions have a bolt threading of M5x1.0 x 10.0 mm deep.
- Imperial threaded versions have a bolt threading of 10-32 UNF x 0.28 inch deep.
- F89D has BSP air connections only

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA

ACTUATOR PISTON DISPLACEMENT

Piston displacement is the total volume of pressurized air after the actuator has completed its stroke.

TABLE 4 - ACTUATOR VOLUME

Model	Opening		Closing	
	litres	cu.in	litres	cu.in
F89-002	0.11	6.7	0.09	5.5
F89-003	0.17	10.4	0.14	8.5
F89-004	0.25	15.3	0.21	12.8
F89-006	0.36	21.8	0.29	17.7
F89-009	0.57	34.9	0.48	29.3
F89-014	0.90	54.9	0.73	44.5
F89-020	1.37	83.8	1.08	65.9
F89-032/033	2.10	128.2	1.66	101.3
F89-051/052	3.10	189.2	2.63	160.5
F89-084/085/086	5.09	310.6	3.87	236.2
F89-139/140/141	8.92	544.3	6.81	415.6
F89-240	15.40	939.8	12.63	770.7

TABLE 5 - ACTUATOR CYCLING TIME (s)

Model	DA				SR			
	Travel time		Total time		Travel time		Total time	
	Opening	Closing	Opening	Closing	Opening	Closing	Opening	Closing
F89-002	0.1	0.0	0.1	0.0	0.1	0.1	0.1	0.1
F89-003	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
F89-004	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
F89-006	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
F89-009	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
F89-014	0.3	0.2	0.3	0.3	0.4	0.2	0.5	0.2
F89-020	0.4	0.3	0.5	0.4	0.9	0.3	1.0	0.4
F89-032/033	0.5	0.5	0.7	0.6	1.0	0.5	1.2	0.7
F89-051/052	0.8	0.7	1.1	0.9	1.2	0.7	1.5	0.9
F89-084/085/086	0.8	0.8	1.8	1.7	1.9	0.6	3.0	1.1
F89-139/140/141	1.4	1.5	3.1	2.9	3.2	1.1	5.0	1.8
F89-240	2.9	3.4	6.5	6.0	6.1	4.1	9.7	6.9

NOTES

- The actuator stroke time consist of the time required to build up pressure in the actuator and consequently move the pistons and valve (=travel time). The sum of these values is the total cycling time.
- The actuator stroke time varies with the supplied air pressure, solenoid valve, and required valve torque, and are for indication only.
- Speed reduction on inlet or exhaust ports will improve actuator endurance and are required to meet the lifetime as per EN15714-3 standard.
- Indicated stroke times above are based on a bare actuator using 5.5 bar (80 psi) air pressure and a solenoid valve with C_v of 1300 l/m (46 CFM).

TABLE 6 - ACTUATOR WEIGHT

Model	DA		SR	
	kg	lbs	kg	lbs
F89-002	1.0	2.2	-	-
F89-003	1.4	3.1	1.7	3.7
F89-004	2.1	4.6	2.6	5.7
F89-006	2.9	6.4	3.6	7.9
F89-009	3.7	8.2	4.9	10.8
F89-014	5.3	11.7	7.3	16.1
F89-020	7.9	17.4	11.0	24.3
F89-032/033	12.1	26.7	16.7	36.8
F89-051/052	18.3	40.3	24.9	54.9
F89-084/085/086	27.8	61.3	39.7	87.5
F89-139/140/141	45.8	101.0	69.5	153.2
F89-240	77.5	170.9	112.4	247.8

NOTES

Air consumption calculation: volume in table represents actual free air volume in either open or close direction.

Air consumption will vary depending on supply pressure. To determine air consumption per minute use the following formula:

Double acting [nL/min]:

$$\left(\frac{\text{Open} + \text{Close volume (l)}}{1} \right) \left(\frac{\text{Supply}}{1} \right) \left(\frac{\text{Cycles}}{\text{Min}} \right)$$

Double acting [SCFM]:

$$\left(\frac{\text{Open} + \text{Close volume (in}^3\text{)}}{1728} \right) \left(\frac{\text{Supply}}{14.7} \right) \left(\frac{\text{Cycles}}{\text{Min}} \right)$$

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA

MATERIALS OF CONSTRUCTION

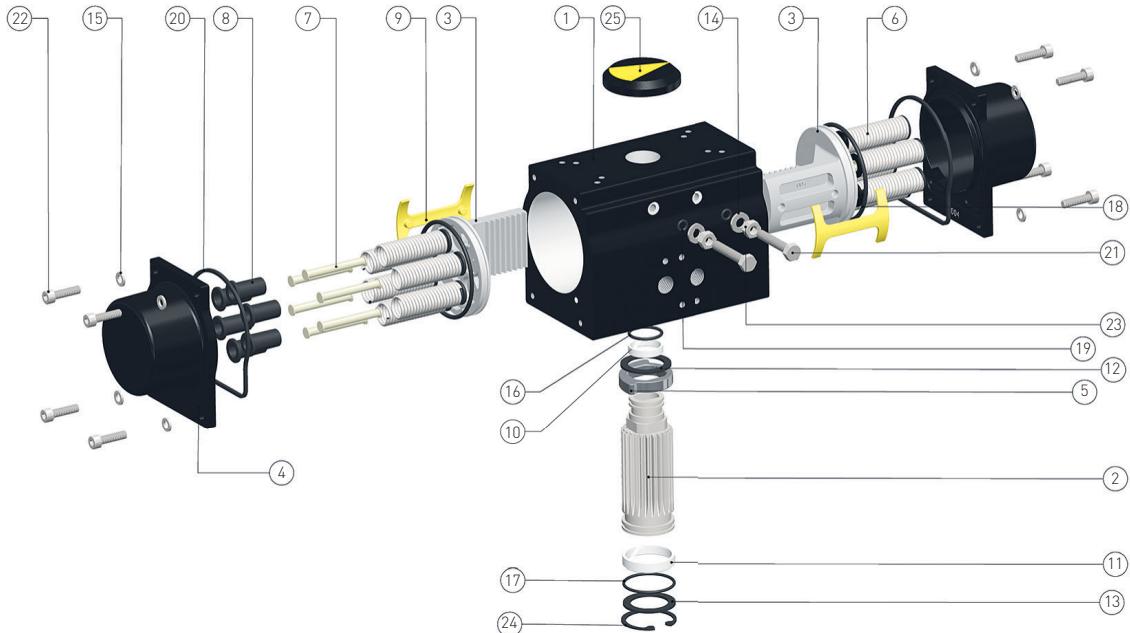


TABLE 7 - MATERIALS OF CONSTRUCTION

No.	Item	Material	US material std	BS material std	DIN material std	Finish
1	Body	Extruded aluminium ASTM B221 type 6063T6	ASTM B221	BS 1474 6063	DIN 3.33206.51	Anodized 5-8 microns + ESPC 60-80 microns
2	Pinion	Hot rolled carbon steel bar ASTM A108 grade 1045	A108	BS 970 080M40	C40	Zink-Nickel plated 8-12 microns
3	Piston	Die cast aluminium alloy ASTM B85 type A380 /BS 1490 grade LM24	ASTM B85	BS 1490	DIN 1725-2300 or 226	Anodized
4	End cap	Die cast aluminium alloy ASTM B85 type A380/BS 1490 grade LM24	ASTM B85	BS 1490	DIN 1725-2300 or 226	ESPC 60-80 microns
5	Cam	Cast grade SAE 1045/C45 / EN8				Blackodised
6	Spring	Spring steel as per ASTM A401	ASTM A401	BS 5216 HS3	DIN 17223 Pt1	Epoxy coated 30-40 microns
7	Spring retainer	Carbon steel				Zinc plated
8	Spring cup	Die cast aluminium alloy ASTM B85 type A380 /BS 1490 grade LM24 (PA66 up to model 052)	ASTM B85	BS 1490	DIN1725-2300 or 226	Anodized
9	Piston guide	Zytel 101F NC010				Natural
10	Top bearing	PAR ^[1] + 25% glass filled				Natural
11	Bottom bearing	PAR ^[1] + 25% glass filled				Natural
12	Top thrust washer	PA66 ^[2]				Natural
13	Bottom thrust washer	PA66 ^[2]				Natural
14	Travel stop washer	SS ^[3] ISO 3506 A2-70 grade				Natural
15	End cap washer [spring washer]	SS ^[3] ISO 3506 A2-70 grade				Natural
16	Top O-ring [pinion]	NBR shore 70 A				Natural
17	Bottom O-ring [pinion]	NBR shore 70 A				Natural
18	O-ring [piston]	NBR shore 70 A				Natural
19	O-ring [travel stop]	NBR shore 70 A				Natural
20	Gasket [end cap]	NBR shore 70 A				Natural
21	Bolt - travel stop	SS ^[3] ISO 3506 A2-70 grade				Natural
22	Bolt - end cap	SS ^[3] ISO 3506 A2-70 grade				Natural
23	Nut - travel stop	SS ^[3] ISO 3506 A2-70 grade				Natural
24	Circlip (bottom)	Carbon steel				Zink-Nickel plated
25	Position indicator	ABS plastic				Natural

1. POM Acetal Resin

2. Polyamide grade 66

3. Stainless steel

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA

TORQUE OUTPUT

Double acting actuator

For sizing of double acting actuators use the following table and select the actuator which will provide nearest torque output above the anticipated torque of the valve and required safety factor.

TABLE 8 - DA TORQUE (Nm)

Model	Air pressure (bar)						
	3	4	5	5.5	6	7	8.3
F89-002	11	15	18	20	22	25	30
F89-003	17	22	28	31	33	39	46
F89-004	25	34	42	46	50	59	70
F89-006	36	48	60	66	72	84	100
F89-009	58	77	96	106	116	135	160
F89-014	90	121	151	166	181	211	250
F89-020	132	177	221	243	265	309	366
F89-032/033	208	277	346	381	416	485	575
F89-051/052	315	420	525	577	630	735	871
F89-084/085/086	525	701	876	963	1051	1226	1454
F89-139/140/141	913	1218	1522	1674	1826	2131	2527
F89-240	1508	2011	2514	2765	3017	3520	4173

TABLE 9 - DA TORQUE (in-lb)

Model	Air pressure (psi)						
	40	60	70	80	90	100	120
F89-002	100	134	167	184	201	234	277
F89-003	147	197	246	270	295	344	408
F89-004	223	297	372	409	446	521	617
F89-006	320	427	534	587	641	747	886
F89-009	512	683	853	938	1024	1194	1416
F89-014	801	1068	1334	1468	1601	1868	2215
F89-020	1173	1563	1954	2150	2345	2736	3244
F89-032/033	1841	2455	3068	3375	3682	4295	5093
F89-051/052	2789	3718	4648	5112	5577	6507	7715
F89-084/085	4652	6203	7754	8529	9304	10855	12871
F89-140/141	7749	10332	12915	14206	15497	18080	21438
F89-240	13357	17810	22262	24489	26715	31167	36955

Spring return actuator

Sizing of spring return actuators is more complex. First you need to determine the desired 'failure mode' (fail open or fail closed). Secondly you need to determine the critical torque points for the subject valve using the table below.

Butterfly valves 'fail closed'

Start of air torque
End of spring torque

Butterfly valves 'fail open'

Start of spring torque
End of air torque

Ball valves 'fail closed'

Start of air (unseating) torque
End of air (full open) torque
Start of spring (breakout from open) torque
End of spring (re-seating) torque

Ball valves 'fail open'

Start of spring (unseating) torque
End of spring (full open) torque
Start of air (breakout from open) torque
End of air (re-seating) torque

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA

TABLE 10 - SR TORQUE (Nm)

Model	Number of springs	Air pressure [bar]												Spring torque	
		3		4		5		5.5		6		7		8.3	
		AST	AET	AST	AET	AST	AET	AST	AET	AST	AET	AST	AET	SST	SET
F89-003	4	11	8	16	13	22	19	25	22	28	24	33	30	40	37
	5	9	6	15	11	21	17	23	19	26	22	32	28	39	35
	6	8	3	14	9	19	14	22	17	25	20	30	26	37	33
	7	7	1	12	7	18	12	20	15	23	18	29	23	36	31
	8			11	4	16	10	19	13	22	16	27	21	34	28
	9			9	2	15	8	17	11	20	13	26	19	33	26
	10					13	6	16	8	19	11	24	17	32	24
	11					12	3	15	6	17	9	23	14	30	22
	12							13	4	16	7	21	12	29	19
														27	17
F89-004	4	17	12	25	21	33	29	38	33	42	37	50	46	61	57
	5	15	9	23	17	31	26	36	30	40	34	48	43	59	53
	6	12	6	21	14	29	23	33	27	38	31	46	39	57	50
	7	10	3	19	11	27	19	31	23	35	28	44	36	55	47
	8			17	8	25	16	29	20	33	24	42	33	53	44
	9			14	4	23	13	27	17	31	21	40	30	50	41
	10					21	10	25	14	29	18	37	26	48	37
	11					19	6	23	11	27	15	35	23	46	34
	12							21	7	25	11	33	20	44	31
														39	26
F89-006	4	24	13	36	25	48	37	54	43	60	49	72	61	88	77
	5	21	7	33	19	45	31	51	37	57	43	69	55	85	71
	6	18	2	30	14	42	26	48	32	54	38	66	50	82	65
	7			27	8	39	20	45	26	51	32	63	44	79	60
	8			24	2	36	14	42	20	48	26	60	38	76	54
	9					33	9	39	15	45	21	57	33	73	48
	10					30	3	36	9	42	15	54	27	70	43
	11							33	3	39	9	51	21	67	37
	12									37	4	49	16	64	31
														69	36
F89-009	4	38	29	58	48	77	67	87	77	96	86	115	106	140	131
	5	33	21	53	41	72	60	82	70	91	79	111	98	136	123
	6	29	14	48	33	67	53	77	62	86	72	106	91	131	116
	7	24	7	43	26	62	45	72	55	82	65	101	84	126	109
	8			38	19	57	38	67	48	77	57	96	77	121	102
	9			33	11	53	31	62	40	72	50	91	69	116	94
	10					48	23	57	33	67	43	86	62	111	87
	11					43	16	52	26	62	35	81	55	106	80
	12							48	18	57	28	77	47	102	72
														88	58
F89-014	4	60	46	91	76	121	106	136	121	151	136	181	166	220	205
	5	53	35	83	65	113	95	128	110	143	125	173	155	213	194
	6	45	23	75	53	106	84	121	99	136	114	166	144	205	183
	7	38	12	68	42	98	72	113	88	128	103	158	133	198	172
	8			60	31	91	61	106	76	121	91	151	122	190	161
	9			53	20	83	50	98	65	113	80	143	110	183	150
	10					76	39	91	54	106	69	136	99	175	138
	11					68	28	83	43	98	58	128	88	168	127
	12							76	32	91	47	121	77	160	116
														134	90
F89-020	4	86	62	130	107	174	151	196	173	218	195	262	239	320	296
	5	74	45	118	89	162	133	184	155	206	177	251	221	308	279
	6	62	27	107	72	151	116	173	138	195	160	239	204	296	261
	7	51	10	95	54	139	98	161	120	183	142	227	186	285	244
	8			83	37	127	81	149	103	171	125	216	169	273	226
	9			72	19	116	63	138	85	160	107	204	151	261	209
	10					104	46	126	68	148	90	192	134	250	191
	11					92	28	114	50	136	72	181	116	238	174
	12							103	33	125	55	169	99	226	156
														210	140

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA

TABLE 10 - SR TORQUE (Nm) continued

Model	Number of springs	Air pressure [bar]												Spring torque	
		3		4		5		5.5		6		7		8.3	
		AST	AET	AST	AET	AST	AET	AST	AET	AST	AET	AST	AET	SST	SET
F89-032/033	4	134	96	203	166	272	235	307	270	341	304	411	374	501	464
	5	115	69	184	138	254	207	288	242	323	276	392	346	482	436
	6	96	41	166	110	235	179	270	214	304	249	374	318	464	408
	7	78	13	147	82	216	151	251	186	286	221	355	290	445	380
	8			129	54	198	124	232	158	267	193	336	262	426	352
	9				110	26	179	96	214	130	249	165	318	234	408
	10					161	68	195	102	230	137	299	206	389	296
	11					142	40	177	75	211	109	281	178	371	269
	12							158	47	193	81	262	151	352	241
														334	223
F89-051/052	4	195	135	300	240	405	345	457	398	510	450	615	555	751	691
	5	165	90	270	195	375	300	428	353	480	405	585	510	721	647
	6	135	45	240	150	345	255	398	308	450	360	555	465	691	602
	7	105	1	210	105	315	210	368	263	420	315	525	420	662	557
	8			180	61	285	166	338	218	390	270	495	375	632	512
	9				150	16	255	121	308	173	360	226	465	331	602
	10					225	76	278	128	330	181	435	286	572	422
	11					195	31	248	83	300	136	405	241	542	377
	12							218	38	270	91	375	196	512	332
														539	359
F89-084/085/086	4	329	231	504	406	679	581	767	669	855	757	1030	932	1257	1159
	5	280	157	455	332	630	507	718	595	806	683	981	858	1208	1085
	6	231	83	406	258	581	433	669	521	757	609	932	784	1159	1011
	7	181	10	356	185	531	360	619	448	707	536	882	711	1109	938
	8			307	111	482	286	570	374	658	462	833	637	1060	864
	9				258	37	433	212	521	300	609	388	784	563	1011
	10					384	139	472	227	560	315	735	490	962	717
	11					335	65	423	153	511	241	686	416	913	643
	12							374	80	462	168	637	343	864	570
														883	589
F89-139/140/141	4	548	384	840	676	1131	967	1277	1113	1423	1259	1714	1550	2094	1930
	5	466	262	758	554	1049	845	1195	991	1341	1137	1632	1428	2012	1808
	6	384	139	676	431	967	722	1113	868	1259	1014	1550	1305	1930	1685
	7	303	16	595	308	886	599	1032	745	1178	891	1469	1182	1849	1562
	8			513	186	804	477	950	623	1096	769	1387	1060	1767	1440
	9				431	63	722	354	868	500	1014	646	1305	937	1685
	10					640	231	786	377	932	523	1223	814	1603	1194
	11					558	109	704	255	850	401	1141	692	1521	1072
	12							623	132	769	278	1060	569	1440	949
														1472	981
F89-240	4	954	676	1457	1179	1960	1682	2211	1933	2462	2184	2965	2687	3619	3341
	5	815	469	1318	972	1821	1475	2072	1726	2323	1977	2826	2480	3480	3134
	6	676	261	1179	764	1682	1267	1933	1518	2184	1769	2687	2272	3341	2926
	7	538	53	1041	556	1544	1059	1795	1310	2046	1561	2549	2064	3203	2718
	8			902	348	1405	851	1656	1102	1907	1353	2410	1856	3064	2510
	9				764	140	1267	643	1518	894	1769	1145	2272	1648	2926
	10					1128	435	1379	686	1630	937	2133	1440	2787	2094
	11					990	227	1241	478	1492	729	1995	1232	2649	1886
	12							1102	270	1353	521	1856	1024	2510	1678
														2495	1663

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA

TABLE 11 - SR TORQUE (in-lb)

Model	Number of springs	Air pressure (psi)												Spring torque			
		40		60		70		80		90		100		120			
		AST	AET	AST	AET	AST	AET	AST	AET	AST	AET	AST	AET	AST	AET		
F89-003	4	97	71	142	115	195	168	221	195	248	213	292	266	354	328	80	53
	5	80	53	133	97	186	151	204	168	230	195	283	248	345	310	97	62
	6	70	30	120	79	169	128	193	153	218	177	267	226	331	290	118	77
	7	58	10	107	59	156	108	180	133	205	157	254	207	318	270	137	90
	8			94	39	143	89	168	113	192	138	241	187	305	251	157	103
	9			81	20	130	69	155	94	179	118	229	167	292	231	177	116
	10					117	49	142	74	167	99	216	148	280	212	196	128
	11					105	30	129	54	154	79	203	128	267	192	216	141
	12							116	35	141	59	190	108	254	172	236	154
	4	151	106	221	186	292	257	337	292	372	328	443	407	540	505	115	80
	5	133	80	204	151	275	230	319	266	354	301	425	381	523	469	142	97
F89-004	6	110	51	184	125	259	200	296	237	333	274	407	348	504	445	172	113
	7	91	22	165	97	240	171	277	208	314	245	388	320	485	416	201	132
	8			146	68	221	142	258	179	295	217	369	291	466	388	230	151
	9			127	39	202	113	239	151	276	188	351	262	447	359	258	170
	10					183	85	220	122	257	159	332	233	428	330	287	189
	11					164	56	201	93	238	130	313	205	409	301	316	208
	12							182	65	220	102	294	176	391	273	344	227
	4	214	117	320	223	426	329	479	382	533	435	639	541	777	679	202	105
	5	188	66	294	172	400	278	453	332	506	385	613	491	751	629	253	131
	6	162	15	268	122	374	228	427	281	480	334	586	440	724	578	303	157
	7			242	71	348	177	401	230	454	284	560	390	698	528	354	183
	8			215	21	322	127	375	180	428	233	534	339	672	477	404	210
	9					295	76	348	129	402	183	508	289	646	427	455	236
	10					269	26	322	79	375	132	482	238	620	376	505	262
	11							296	28	349	82	455	188	594	326	556	288
	12							323	31	429	137	567	275	606	314		
F89-009	4	337	257	514	425	682	593	771	682	850	762	1019	939	1240	1160	257	168
	5	292	186	469	363	638	531	726	620	806	700	983	868	1204	1089	319	213
	6	254	124	424	295	595	466	680	551	765	636	936	807	1158	1029	388	258
	7	210	60	381	230	552	401	637	486	722	572	893	742	1115	964	452	301
	8			295	101	466	272	551	357	636	443	807	613	1029	835	581	388
	9					423	207	508	293	593	378	764	549	986	770	646	431
	10					380	143	465	228	550	313	721	484	943	706	710	474
	11							422	163	507	249	678	419	900	641	775	517
	12																
	4	531	407	806	673	1072	939	1204	1072	1337	1204	1603	1470	1948	1816	399	266
	5	469	310	735	576	1001	841	1134	974	1266	1107	1532	1373	1886	1718	496	337
F89-014	6	402	207	669	474	936	741	1069	874	1202	1008	1469	1274	1816	1621	594	399
	7	335	108	602	375	869	642	1002	775	1136	909	1403	1175	1750	1522	693	465
	8			536	276	803	543	936	676	1069	810	1336	1076	1683	1423	792	532
	9			469	177	736	444	870	577	1003	711	1270	978	1617	1324	891	598
	10					670	345	803	478	937	612	1203	879	1550	1226	990	665
	11					603	246	737	379	870	513	1137	780	1484	1127	1089	731
	12							670	280	804	414	1070	681	1417	1028	1188	798
	4	762	549	1151	948	1541	1337	1736	1532	1931	1727	2320	2117	2834	2622	620	416
	5	655	399	1045	788	1435	1178	1630	1373	1824	1568	2223	1957	2728	2471	779	514
	6	553	243	943	633	1334	1024	1530	1220	1725	1415	2116	1806	2624	2314	930	620
	7	449	88	840	478	1231	869	1426	1065	1622	1260	2013	1651	2521	2159	1085	723
	8			737	323	1128	714	1323	910	1518	1105	1909	1496	2418	2004	1240	827
	9			633	168	1024	559	1220	755	1415	950	1806	1341	2314	1849	1395	930
	10					921	404	1116	600	1312	795	1703	1186	2211	1694	1550	1033
	11					818	249	1013	445	1208	640	1599	1031	2107	1539	1705	1137
	12							910	290	1105	485	1496	876	2004	1384	1860	1240

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

GENERAL PURPOSE / HAZARDOUS AREA

TABLE 11 - SR TORQUE (in·lb) continued

Model	Number of springs	Air pressure (psi)												Spring torque		
		40		60		70		80		90		100		120		
		AST	AET	AST	AET	AST	AET	AST	AET	AST	AET	AST	AET	AST	AET	
F89-032/033	4	1187	850	1798	1470	2409	2081	2719	2391	3020	2692	3640	3312	4437	4109	
	5	1019	611	1630	1222	2250	1833	2551	2143	2861	2444	3472	3064	4269	3861	
	6	854	360	1467	974	2081	1587	2388	1894	2695	2201	3308	2815	4106	3612	
	7	689	113	1303	727	1916	1341	2223	1647	2530	1954	3144	2568	3942	3366	
	8			1138	480	1752	1094	2059	1401	2366	1707	2979	2321	3777	3119	
	9				974	233	1587	847	1894	1154	2201	1461	2815	2074	3612	
	10					1423	600	1730	907	2037	1214	2650	1828	3448	2625	
	11						1258	353	1565	660	1872	967	2486	1581	3283	2378
	12							1401	413	1707	720	2321	1334	3119	2132	
F89-051/052	4	1727	1196	2657	2126	3587	3056	4047	3525	4517	3985	5447	4915	6651	6120	
	5	1461	797	2391	1727	3321	2657	3791	3126	4251	3587	5181	4517	6386	5730	
	6	1198	402	2127	1332	3057	2261	3522	2726	3986	3191	4916	4120	6124	5329	
	7	933	5	1862	934	2792	1864	3256	2328	3721	2793	4651	3723	5859	4931	
	8			1597	536	2526	1466	2991	1931	3456	2395	4386	3325	5594	4533	
	9				1332	139	2261	1068	2726	1533	3191	1998	4120	2927	5329	
	10					1996	670	2461	1135	2926	1600	3855	2530	5064	3738	
	11						1731	273	2196	737	2661	1202	3590	2132	4799	
	12							1931	340	2395	805	3325	1734	4533	2942	
F89-084/085/ 086	4	2916	2048	4467	3599	6018	5150	6793	5925	7568	6700	9119	8251	11135	10267	
	5	2482	1393	4033	2944	5584	4494	6359	5270	7134	6045	8685	7596	10701	9612	
	6	2048	738	3599	2288	5150	3839	5925	4614	6700	5390	8251	6940	10267	8956	
	7			3156	1642	4707	3192	5482	3968	6258	4743	7808	6294	9824	8310	
	8				2722	986	4273	2537	5048	3312	5824	4088	7374	5638	9390	
	9					3839	1882	4614	2657	5390	3432	6940	4983	8956	6999	
	10					3405	1235	4180	2010	4956	2786	6506	4337	8522	6352	
	11					2971	580	3746	1355	4522	2130	6072	3681	8088	5697	
	12						3312	709	4088	1484	5638	3035	7654	5051	7820	
F89-139/ 140/141	4	4853	3400	7436	5983	10018	8566	11310	9857	12601	11149	15184	13732	18542	17090	
	5	4126	2320	6709	4903	9292	7485	10584	8777	11875	10068	14458	12651	17816	16009	
	6	3400	1230	5983	3813	8566	6396	9857	7688	11149	8979	13732	11562	17090	14920	
	7			5266	2724	7849	5307	9140	6598	10431	7890	13014	10473	16372	13830	
	8				4539	1643	7122	4226	8414	5518	9705	6809	12288	9392	15646	
	9					6396	3137	7688	4428	8979	5720	11562	8303	14920	11660	
	10					5670	2047	6961	3339	8253	4630	10836	7213	14193	10571	
	11					4944	967	6235	2258	7527	3550	10109	6133	13467	9491	
	12						5518	1169	6809	2461	9392	5043	12750	8401	13037	
F89-240	4	8451	5989	12903	10441	17356	14894	19582	17120	21808	19346	26261	23798	32049	29587	
	5	7220	4155	11672	8608	16125	13060	18351	15286	20577	17513	25030	21965	30818	27753	
	6	5989	2313	10441	6766	14894	11218	17120	13444	19346	15671	23798	20123	29587	25911	
	7			9219	4923	13671	9376	15898	11602	18124	13828	22576	18281	28364	24069	
	8				7988	3081	12440	7534	14667	9760	16893	11986	21345	16439	27133	
	9					11218	5692	13444	7918	15671	10144	20123	14596	25911	20385	
	10					9987	3849	12213	6076	14439	8302	18892	12754	24680	18543	
	11					8765	2007	10991	4233	13217	6460	17670	10912	23458	16700	
	12						9760	2391	11986	4618	16439	9070	22227	14858	22097	

KEYSTONE F89 PNEUMATIC QUARTER-TURN ACTUATOR

ORDERING GUIDE

Example:	89E	020	03	08	N14	N	2	M	00	M10	D25
Figure number											
89D	ISO 5211 flange and shaft										
89E	ISO flange and Keystone shaft										
89U	Keystone flange and shaft										
Model/Size											
002	002	020	020		085	085					
003	003	032	032		086	086					
004	004	033	033		139	139					
006	006	051	051		140	140					
009	009	052	052		141	141					
014	014	084	084		240	240					
Action											
01	DA										
03	SR FC CW (std)										
04	SR FC CCW										
Spring rating											
04	4 springs	08	8 springs		12	12 springs					
05	5 springs	09	9 springs		XX	not applicable					
06	6 springs	10	10 springs								
07	7 springs	11	11 springs								
Air connection											
N14	1/4" NPT	P14	1/4" BSPP								
N12	1/2" NPT (F89-240 only)	P12	1/2" BSPP (89-240 only)								
Temperature range											
H	High temp (FKM)										
N	Standard (NBR)										
L	Low temp										
Travel stops											
2	Dual shaft (std)										
3	Single stroke limiter (endcap)										
4	Double stroke limiter (endcap)										
Flange threading											
M	Metric										
U	Imperial										
Variant											
00	Standard										
A4	A4 SS bolts										
Valve flange*											
F03	PCD 36 mm (ISO 5211)	M05	F03 + F05 (ISO 5211)	U1C	PCD 1.75" (Keystone 45 degrees)						
F04	PCD 42 mm (ISO 5211)	M07	F05 + F07 (ISO 5211)	U34	PCD 3.25" (Keystone 45 degrees)						
F05	PCD 50 mm (ISO 5211)	M10	F07 + F10 + F12 (ISO 5211)	U50	PCD 5.00" (Keystone 45 degrees)						
F07	PCD 70 mm (ISO 5211)	M11	F07+F10+F12 (ISO 5211)	U68	PCD 6.50" (Keystone 45 degrees)						
F10	PCD 102 mm (ISO 5211)	M12	F10 + F12 (ISO 5211)	C34	PCD 1.75 + 3.25" (Keystone 45 degrees)						
F12	PCD 125 mm (ISO 5211)	M14	F10 + F14 (ISO 5211)	C50	PCD 3.25 + 5.00" (Keystone 45 degrees)						
F14	PCD 140 mm (ISO 5211)	M16	F12 + F16 (ISO 5211)	C68	PCD 5.00 + 6.50" (Keystone 45 degrees)						
F16	PCD 165 mm (ISO 5211)										
Shaft*											
S11	Star 11	D12	E1 - DD12 x 8	P06	DD 3/8" x 1/4" [9.53 x 6.35 mm]						
S14	Star 14	D16	E2 - DD16 x 11	P09	DD 9/16" x 3/8" [14.29 x 9.53 mm]						
S17	Star 17	D20	E3 - DD20 x 14	P0A	DD 5/8" x 7/16" [15.88 x 11.1 mm]						
S22	Star 22	D25	E4 - DD25 x 18	P0C	DD 3/4" x 1/2" [19.05 x 12.7 mm]						
S27	Star 27	D30	E5 - DD30 x 22	P0E	DD 7/8" x 5/8" [22.2 x 15.88 mm]						
S36	Star 36	M35	E6 - 35K10	U0D	Dia 13/16"; K3/16 x 3/16" [20.6K4.78 mm]						
S46	Star 46	M40	E7 - 40K12	U10	Dia 1"; K11/4x1/4" [25.4K6.35 mm]						
S55	Star 55	M44	E8 - 44K12	U12	Dia 11/8"; K11/4x1/4" [28.8K6.35 mm]						
S75	Star 75	M50	E9 - 50K14	U16	Dia 13/8"; K5/16 x 5/16" [34.9K7.94 mm]						
		M60	E0 - 60K18	U1A	Dia 15/8"; K3/8 x 3/8" [41.3K9.53 mm]						
		M70	EA - 70K20	U1E	Dia 17/8"; K1/2 x 3/8" [47.6K12.7 mm]						
		M80	EB - 80K22	U24	Dia 21/4"; K1/2 x 3/8" [57.2K12.7 mm]						
		M90	EC - 90K25	U26	Dia 23/8"; K5/8" [63.3K15.9 mm]						
		MA0	ED - 100K28	U2C	Dia 25/8"; K7/8" [69.9K15.9 mm]						
		MS0	Bore 30 x K8 (Keystone)	U38	Dia 31/2"; K7/8" [88.9K22.23 mm]						

* Please consult technical pages for the specific flange and shaft details per model.

© 2014, 2020 Emerson Electric Co. All rights reserved 05/20. Keystone is a mark owned by one of the companies in the Emerson Automation Solutions business unit of Emerson Electric Co. The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their prospective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

Emerson Electric Co. does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Emerson Electric Co. product remains solely with the purchaser.

Emerson.com/FinalControl