

MODEL NUMBER

7G-1356T-B2


PRODUCT LINE

GO™ Switch 70 Series Hex Head

SPECIFICATIONS


Model	7G Model
Contact Form	SPDT
Sensing Range	Approx. 0.1" end sensing (Rated 2,000 psi)
Outlet Position	Bottom of enclosure
Enclosure Material	316L Stainless Steel
Area Classification	ATEX/IECEX Zone 1, Exdb, Hermetically Sealed
Wiring Option	PVC cable, 3ft
Regional Certification	No Regional Certification
Custom Field	TopWorx Certified: IP 66/67/68, NEMA 4x/6/6P

WIRING DIAGRAM

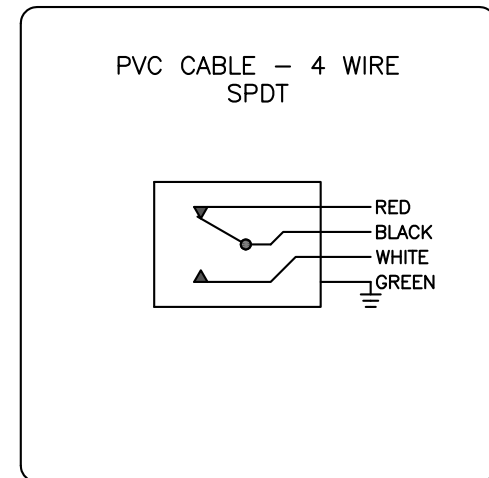

Current as of August 31, 2021 – Subject to change without notice.

NAMEPLATE



Ex db IIC T6 Gb
 Ex tb IIIC T85°C Db
 -60°C ≤ Ta ≤ 50°C; IP66
 120VAC/4A; 24VDC/3A Resistive
 Conduit: 1/2 NPT - Hermetically Sealed
 Baseefa 08ATEX0360X IECEx BAS 08.0122X



TOPWORX™

3300 Fern Valley Road
 Louisville, KY 40213

(502)969-8000 PH
 (502)969-5911 FAX
 www.topworx.com