



Direct-acting 2/2 way plunger valve

- Gas valve with DVGW approval in accordance with EN 161, size A
- Compact design, up to DN12/500 mbar
- Body in brass
- Dirt filter in the inlet



Product variants described in the data sheet may differ from the product presentation and description.

Type description

The direct acting plunger solenoid valve Type 0285 is normally closed by spring force. During switching the core of the seal is tightened against the spring force, and opens the valve. The inlet has a gauze filter fitted. The valve is delivered as standard with a bracket fitting. Type 0285 is best suited to flammable gases.

Table of contents

1. General Technical Data	3
2. Circuit functions	3
3. Dimensions	4
4. Performance specifications	4
4.1. Power consumption.....	4
5. Ordering information	5
5.1. Bürkert eShop – Easy ordering and quick delivery.....	5
5.2. Bürkert product filter.....	5
5.3. Ordering chart.....	5

1. General Technical Data

Product properties	
Dimensions	Detailed information can be found in chapter "3. Dimensions" on page 4.
Material	
Seal	NBR, FKM
Body	Brass
Internal parts of valve	Stainless steel 1.4105, 1.4571
Nominal diameter	DN6...DN12
Switching function	Detailed information can be found in chapter "2. Circuit functions" on page 3.
Special feature	Gauze filter in inlet
Performance data	
Duty cycle	100 % continuous operation
Switching frequency	ca. 1000/min
Electrical data	
Operating voltage	24 V DC, 220...230 V/50 Hz, 220...230/UC
Power consumption	Detailed information can be found in chapter "4.1. Power consumption" on page 4.
Voltage tolerance	± 10 %
Medium data	
Medium temperature	
NBR	0 °C...+ 80 °C
FKM	0 °C...+ 80 °C
Operating medium	
NBR	Flammable mediums like energy gas, natural gas, liquid gas, acetylene, hydrogen
FKM	As NBR, however with more volatile substances, e.g. solvents, hydrosulphide etc.
Process/Port connection & communication	
Medium connectors	Thread R ¼ and R ½ acc. to DIN 2999
Electrical connection	Cable plug for cable Ø 7 mm (included in delivery)
Approvals and certificates	
Degree of protection	IP65 with cable plug
DVGW-Approval	Group 2, Class A
Test regulations	DIN EN 161
Environment and installation	
Installation position	As required, preferably with actuator upright
Installation instructions	With retaining bracket
Ambient temperature	0 °C...+ 60 °C


2. Circuit functions

Circuit functions	Description
	Type: A, solenoid valve 2/2 way Direct-acting Normally closed

3. Dimensions

Note:

- Valve with fitting bracket
- Dimensions in mm

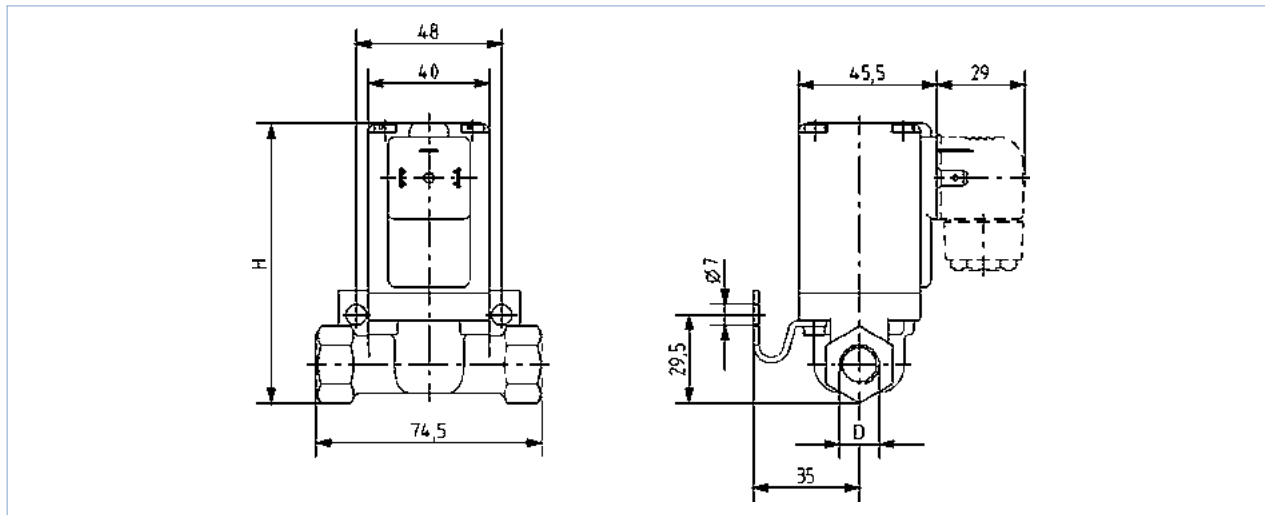

Port connection	H
R ¼	93
R ½	95.5

4. Performance specifications

4.1. Power consumption

Orifice [mm]	Port connection acc. to 2999	K _v value water ^{1.)} [m ³ /h]	Pressure range ^{2.)}		Response times ^{3.)}		Power consumption			Weight [kg]
			AC [bar]	DC/UC [bar]	Opening [ms]	Closing [ms]	Inrush AC [VA]	Hold AC [VA/W]	DC [W]	
6	R ¼, R ½	0.7	3.5	3.5	10...20	20...30	30...75	16/10	12	0.7
12	R ½	1.8	–	0.2						0.7
12	R ½	1.8	0.5	–						0.7

1.) Measured at +20 °C, 1 bar^{2.)} pressure at valve inlet and free outlet

2.) Overpressure to atmospheric pressure

3.) Response times: measured with water at valve outlet at 6 bar and +20 °C. Opening: pressure build-up 0...90 %, closing: pressure decay 100...10 %