



Type 0340 can be combined with...



#### Type 2508


Cable plug

## 3/2-way solenoid valve for gases and fluids

- Service friendly manual override
- Analytical pilot valve for increased safety
- Optimized piston design for low switching pressure
- Energy saving impulse coil
- Explosion proof types


The pilot-controlled 3/2-way solenoid valve Type 0340 with smoothly operating servopiston requires a differential pressure of 0.5 bar for complete opening and closing. A 3/2-way pilot valve (pivoted armature valve) ensures safe and reliable operation.

#### Circuit function C




3/2-way valve, when de-energized outlet port A exhausted, with 3-way pilot control

#### Circuit function D



3/2-way valve, when de-energized outlet port B pressurized, with 3-way pilot control

#### Circuit function C (Impulse)



3/2-way valve, when de-energized outlet port A exhausted, with 3-way pilot control

Technical data	
<b>Orifice</b>	DN 8 - 40 mm
<b>Body material</b>	Brass
<b>Seal material</b>	NBR
<b>Medium</b>	Neutral medium: Compressed air, water, hydraulic oil
<b>Medium temperature</b>	0 to +90 °C
<b>Ambient temperature</b>	Max. +55 °C
<b>Viscosity</b>	Max. 21 mm <sup>2</sup> /s
<b>Voltage tolerance</b>	±10%
<b>Duty cycle</b>	Continuous operation 100% ED
<b>Electrical connection</b>	Cable plug for Ø 7 mm cable (included in delivery) Ex-Version only with terminal box or 3 m cable
<b>Protection class</b>	IP65 with Cable Plug or terminal box
<b>Installation</b>	As required, preferably with actuator upright

<b>Flow rate</b> Kv value water [m <sup>3</sup> /h]	measured at +20 °C, 1 bar pressure at valve inlet and free outlet (see ordering chart)
<b>Pressure values [bar]</b>	Overpressure to the atmospheric pressure (see ordering chart)
<b>Response times [ms]:</b> Opening Closing	Measured at valve outlet at 6 bar and +20 °C Pressure rise 0 to 90%, Pressure drop 100 to 10% (see ordering chart)

## Technical data

### Standard version

Orifice [mm]	Kv value water PDA [m <sup>3</sup> /h]	Port connection A/B and P		Pressure range [bar]	Electr. power consumption				Response times		Weight [kg]
		G	NPT		Inrush AC [VA]	DC [W]	[VA] AC [VA/W]	DC [W]	Opening [ms]	Closing [ms]	
8	0.95	1/4	1/4	0.5 - 16	30	8	15/8	8	25	25	1.0
12	2.30	3/8	3/8						30	30	1.2
12	2.60	1/2	1/2						30	30	1.2
20	6.60	3/4	3/4						40	40	2.2
40	24.00	1 1/2	1 1/2						120	120	6.8

### Impulse version


Orifice [mm]	Kv value water PDA [m <sup>3</sup> /h]	Port connection A/B and P		Pressure range [bar]	Electr. power consumption		Response times		Weight [kg]
		G	NPT		Inrush AC [VA]	DC [W]	Opening [ms]	Closing [ms]	
8	0.95	1/4	1/4	0.5 - 16	11	11	25	25	1.0
12	2.30	3/8	3/8				30	30	1.2
12	2.60	1/2	1/2				30	30	1.2
20	6.60	3/4	3/4				40	40	2.2
40	24.00	1 1/2	1 1/2				120	120	6.8

### Explosion proofed version with temperature class T5


Orifice [mm]	Kv value water PDA [m <sup>3</sup> /h]	Port connection A/B and P		Pressure range [bar]	Electr. power consumption		Response times		Weight [kg]
		G	NPT		Inrush AC [VA]	[VA] AC [VA/W]	Opening [ms]	Closing [ms]	
8	0.95	1/4	1/4	0.5 - 16	40	3	25	25	1.0
12	2.30	3/8	3/8				30	30	1.2
12	2.60	1/2	1/2				30	30	1.2
20	6.60	3/4	3/4				40	40	2.2
25	10.00	1	1	0.5 - 10			70	70	2.7

The orifice size of connection R is larger than the ports A / B and P (see table of dimensions). Thus, the AR flow rate increases by a factor of 1.5 to 2 in the table value.

Material

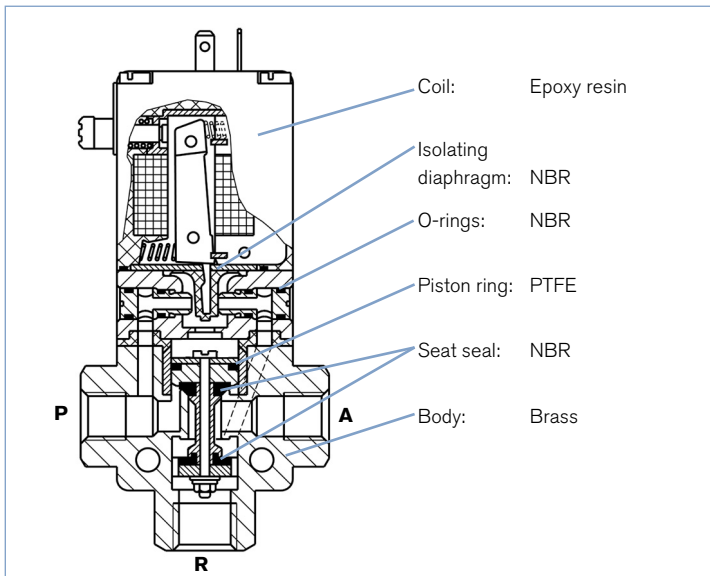

Dimensions [mm] - Standard version

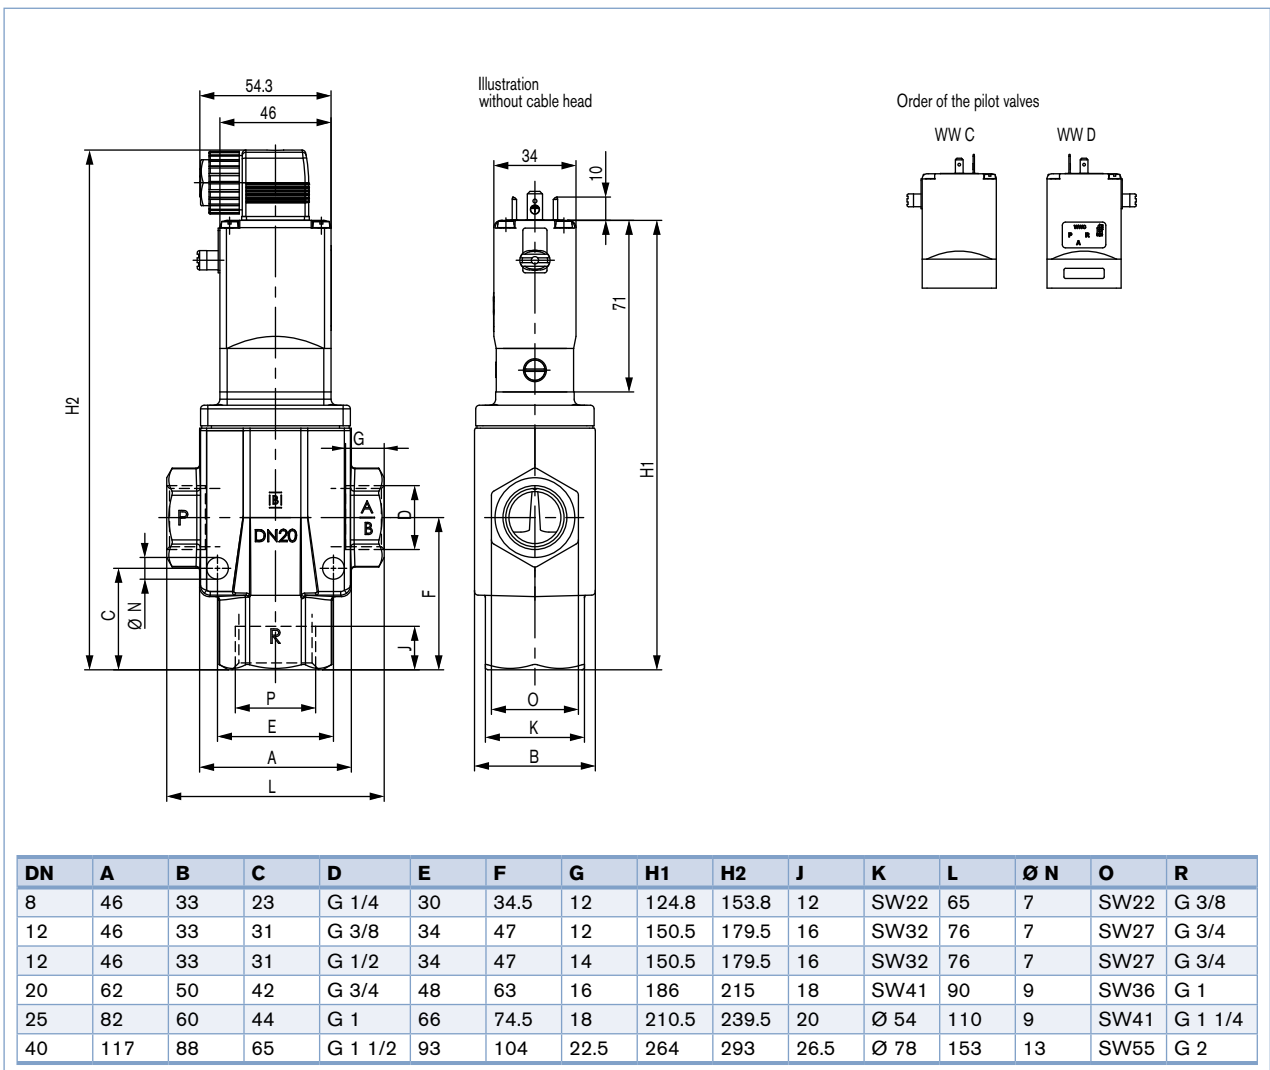

The diagram shows the valve with circuit function C with the terminals P, R and A / B. (see drawing). In circuit function D the manual operation is above port A / B.

Dimensions [mm] - Explosion proof version

