


API 602 PISTON CHECK VALVES


FORGED CARBON, STAINLESS STEEL OR ALLOY STEEL
1/4" - 2" (6 - 50mm), ASME CLASSES 150 - 2680

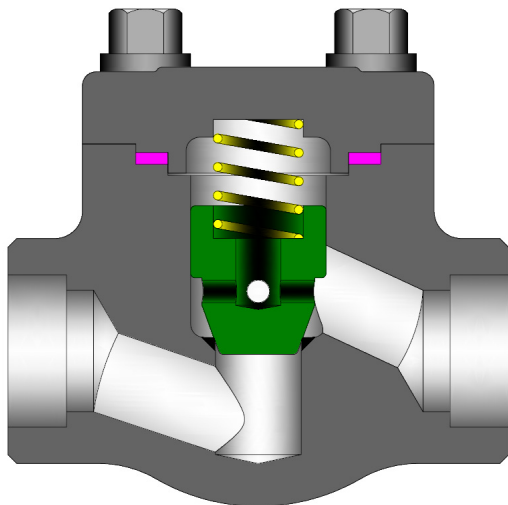

Class	Bore	Fig. No.	
		Piston	Ball
150	Standard	PC01	BC01
	Full	PCL1	BCL1
300	Standard	PC03	BC03
	Full	PCL3	BCL3
600	Standard	PC06	BC06
	Full	PCL6	BCL6
800	Standard	PC08	BC08
	Full	PCL8	BCL8
1500	Standard	PC15	BC15
	Full	PCL5	BCL5
1680	Standard	PC16	BC16
2500	Standard	PC25	BC25
2690	Standard	PC26	BC26

DESIGN FEATURES:

- Standard trim is stellite faced seat integral to the body and 13% chrome disc/ball (API trim 8). Other trims available on request.
- Seat faces lapped for smooth finish and superior sealing.
- Wall thickness per heavy wall API 602 requirements.
- Each valve is shell and seat pressure tested per industry standard API 598.
- Check valve are suitable for service in horizontal line with cap vertical.
- End Flanges have the following raised faces per ASME B16.5:
Classes 150-300: 1/16" (2mm).
Classes 600: 1/4" (7mm).
- Other available options as follows:
 - » Alternate valve materials such as chrome and stainless steel alloys.
 - » Alternate trim materials.
 - » NACE service.
 - » Special cleaning for applications such as oxygen or chlorine.
 - » Other options available as specified.



STANDARD MATERIALS (Other materials available)


PART	MATERIALS			
Body	A105 + Stellite 6 Faced	A182 F11 + Stellite 6 Faced	A182 F22 + Stellite 6 Faced	A182 F316 (1)
Cap	A105	A182 F11	A182 F22	A182 F316
Disc/Ball	A276 T420			A276 T316
Gasket (2)	Spiral Wound SST with Graphite			Spiral Wound SST with PTFE
Spring	Inconel 625			
Body / Cap Bolting (2)	A193 Gr. B7	A193 Gr. B16		A193 Gr. B8M
Identification Plate	Series 300 SST			

1. Threaded and weld end valve bodies A182 F316L
2. Welded bonnets also available.

NOTE: See page 43 for flow, safety and maintenance information.

Design Specifications

Item	Applicable Specification
Wall thickness	API 602
Pressure - temperature ratings	ASME B16.34
General valve design	API 602 & B16.34
End to End dimensions	ASME B16.10
Flange design	ASME B16.5
Thread design	ASME B1.20.1
Butt Weld design	ASME B16.25
Socket Weld design	ASME B16.11
Materials	ASTM




Welded Bonnet Design

PISTON CHECK VALVE DIMENSIONS

(CLASSES 150 - 800)

SIZE	ASME 150			ASME 300			ASME 600		
	Bolted Bonnet			Bolted Bonnet			Bolted Bonnet		
	Standard Bore			Standard Bore			Standard Bore		
in	A	C	D	A	C	D	A	C	D
mm	FE			FE			FE		
½	4.25	2.2	0.39	6	2.2	0.39	6.5	2.2	0.39
13	108	55	10	152	55	10	165	55	10
¾	4.62	2.2	0.5	7	2.2	0.5	7.5	2.2	0.5
19	117	55	13	178	55	13	190	55	13
1	5	2.8	0.69	8	2.8	0.69	8.5	2.8	0.69
25	127	72	18	203	72	18	216	72	18
1¼	5.5	3.2	0.91	8.5	3.2	0.91	9	3.2	0.91
32	140	81	23	216	81	23	229	81	23
1½	6.5	3.6	1.12	9	3.7	1.12	9.5	3.7	1.12
38	165	91	29	229	94	29	241	94	29
2	8	4.4	1.26	10.5	4.4	1.38	11.5	4.4	1.38
50	203	112	32	267	112	35	292	112	35


SIZE	ASME 800											
	Bolted Bonnet						Welded Bonnet					
	Standard Bore			Full Bore			Standard Bore			Full Bore		
	A	C	D	A	C	D	A	C	D	A	C	D
in	WE			WE			WE			WE		
¼	3.11	2.2	0.26	-	-	-	3.11	2.2	0.26	-	-	-
6	79	55	7	-	-	-	79	55	7	-	-	-
3/8	3.11	2.2	0.39	-	-	-	3.11	2.2	0.39	-	-	-
10	79	55	10	-	-	-	79	55	10	-	-	-
½	3.11	2.2	0.39	3.62	2.2	0.5	3.11	2.2	0.39	3.62	2.2	0.5
13	79	55	10	92	55	13	79	55	10	92	55	13
¾	3.62	2.2	0.5	4.37	3	0.69	3.62	2.2	0.5	4.37	3	0.69
19	92	55	13	111	72	18	92	55	13	111	72	18
1	4.37	3	0.69	4.72	3.2	0.91	4.37	3	0.69	4.72	3.2	0.91
25	111	72	18	120	81	23	111	72	18	120	81	23
1¼	4.72	3.2	0.91	5.98	3.7	1.12	4.72	3.2	0.91	5.98	3.7	1.12
32	120	81	23	152	94	29	120	81	23	152	94	29
1½	5.98	3.7	1.12	6.77	4.4	1.4	5.98	3.7	1.12	6.77	4.4	1.42
38	152	94	29	172	112	36	152	94	29	172	112	36
2	6.77	4.4	1.38	8.66	5.2	1.85	6.77	4.4	1.38	8.66	5.2	1.85
50	172	112	35	220	132	47	172	112	35	220	132	47

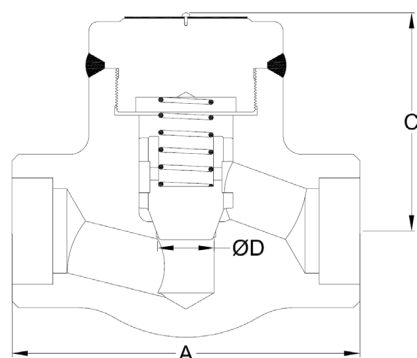

Welded Bonnet Socket Weld Ends Design

WE = Socket Weld / Threaded Ends
FE = Flanged Ends

C = Center to top

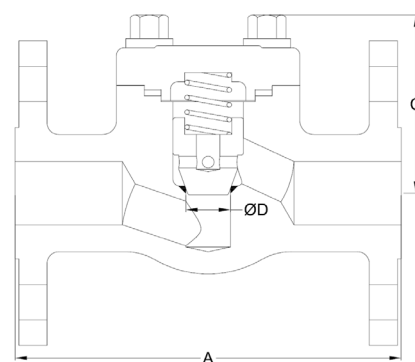

Bolted Bonnet Flanged Ends Design

ADDITIONAL SIZES, MATERIALS AND CLASSES AVAILABLE UPON REQUEST.


2503 Spring Grove Avenue, Cincinnati, OH 45214 • 800.888.2583 • www.powellvalves.com

PISTON CHECK VALVE DIMENSIONS

(CLASSES 1500 - 2680)

SIZE	ASME 1500 & 1690											
	Bolted Bonnet						Welded Bonnet					
	Standard Bore				Full Bore		Standard Bore			Full Bore		
	A				A		A			A		
in	FE	WE	C	D	WE	C	WE	C	D	WE	C	D
¼	-	3.11	2.9	0.26	-	-	3.11	2.9	0.39	-	-	-
6	-	79	73	7	-	-	79	73	10	-	-	-
3/8	-	3.11	2.9	0.39	-	-	3.11	2.9	0.5	-	-	-
10	-	79	73	10	-	-	79	73	13	-	-	-
½	8.5	3.62	2.9	0.39	4.37	2.9	3.62	2.9	0.39	4.37	2.9	0.5
13	216	92	73	10	111	73	92	73	10	111	73	13
¾	9	4.37	2.9	0.5	4.72	3.3	4.37	2.9	0.51	4.72	3.3	0.69
19	229	111	73	13	120	84	111	73	13	120	84	18
1	10	4.72	3.3	0.69	5.98	3.8	4.72	3.3	0.69	5.98	3.8	0.91
25	254	120	84	18	152	97	120	84	18	152	97	23
1¼	11	5.98	3.8	0.91	6.77	4.5	5.98	3.8	0.91	6.77	4.5	1.12
32	279	152	97	23	172	115	152	97	23	172	115	29
1½	12	6.77	4.5	1.12	8.66	5.2	6.77	4.5	1.12	8.66	5.2	1.38
38	305	172	115	29	220	132	172	115	29	220	132	35
2	14.5	8.66	5.2	1.38	9.84	5.2	8.66	5.2	1.38	10.24	5.2	1.85
50	368	220	132	35	250	132	220	132	35	260	132	47


SIZE	ASME 2500 & 2680					
	Bolted Bonnet			Welded Bonnet		
	Standard Bore			Standard Bore		
	A			A		
in	WE	C	D	WE	C	D
½	5.91	4	0.43	5.91	5.3	0.55
13	150	102	11	150	135	14
¾	5.91	4	0.43	5.91	5.3	0.55
19	150	102	11	150	135	14
1	6.69	4.2	0.55	6.69	5.7	0.75
25	170	107	14	170	146	19
1¼	7.87	5	0.63	7.87	6.9	0.98
32	200	128	16	200	176	25
1½	7.87	5	0.98	7.87	6.9	1.1
38	200	128	25	200	176	28
2	9.84	5.6	1.1	9.84	7.7	1.38
50	250	143	28	250	196	35

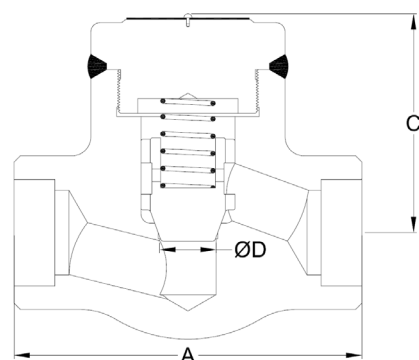

Welded Bonnet Socket Weld Ends Design

WE = Socket Weld / Threaded Ends
FE = Flanged Ends

C = Center to top open

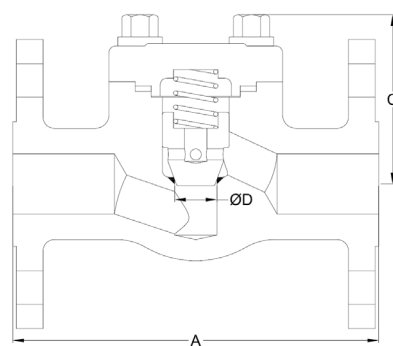

Bolted Bonnet Flanged Ends Design

ADDITIONAL SIZES, MATERIALS AND CLASSES AVAILABLE UPON REQUEST.

2503 Spring Grove Avenue, Cincinnati, OH 45214 • 800.888.2583 • www.powellvalves.com

API 602 PISTON CHECK VALVES

FORGED CARBON, STAINLESS STEEL OR ALLOY STEEL

1/4" - 2" (6 - 50mm), ASME CLASSES 150 - 2680

SIZE	ASME 150			ASME 300			ASME 600			ASME 800											
	Bolted Bonnet			Bolted Bonnet			Bolted Bonnet			Bolted Bonnet						Welded Bonnet					
	Standard Bore			Standard Bore			Standard Bore			Standard Bore			Full Bore			Standard Bore			Full Bore		
	in	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB
mm	FE	KG	FE		KG	FE		KG	FE		KG	WE		KG	WE		KG	WE		KG	WE
¼	-	-	-	-	-	-	-	-	-	3.3	0.7	-	-	-	-	3.1	0.7	-	-	-	-
6	-	-	-	-	-	-	-	-	-	1.5	-	-	-	-	-	1.4	-	-	-	-	-
3/8	-	-	-	-	-	-	-	-	-	3.3	1.5	-	-	-	-	3.1	1.5	-	-	-	-
10	-	-	-	-	-	-	-	-	-	1.5	-	-	-	-	-	1.4	-	-	-	-	-
½	7.5	1.5	8.2	1.5	7.5	1.5	3.1	1.5	4.2	2.6	3.1	1.5	4.2	2.6	3.1	1.5	4.2	2.6	3.1	1.5	4.2
13	3.4	-	3.7	-	3.4	-	1.4	-	1.9	-	1.4	-	1.9	-	1.4	-	1.9	-	1.4	-	1.9
¾	9.7	2.7	10.6	2.7	12.8	2.7	4.2	2.7	5.7	4.9	4.2	2.7	5.7	4.9	4	2.7	5.7	4.9	4	2.7	5.7
19	4.4	-	4.8	-	5.8	-	1.9	-	2.6	-	1.9	-	2.6	-	1.8	-	2.6	-	1.8	-	2.6
1	18.1	5.1	19.4	5.1	20.9	5.1	5.7	5.1	9.3	8.9	5.7	5.1	9.3	8.9	5.7	5.1	9.3	8.9	5.7	5.1	9.3
25	8.2	-	8.8	-	9.5	-	2.6	-	4.2	-	2.6	-	4.2	-	2.6	-	4.2	-	2.6	-	4.2
1¼	19.6	9.1	21.2	9.1	22.9	9.1	9.3	9.1	11.7	13.7	9.3	9.1	11.7	13.7	9.3	9.1	11.7	13.7	9.3	9.1	11.7
32	8.9	-	9.6	-	10.4	-	4.2	-	5.3	-	4.2	-	5.3	-	4.2	-	5.3	-	4.2	-	5.3
1½	26.5	14	30.2	14	34.4	14	11.7	14	19.8	21.9	11.7	14	19.8	21.9	11.7	14	19.8	21.9	11.7	14	19.8
38	12	-	13.7	-	15.6	-	5.3	-	9	-	5.3	-	9	-	5.3	-	9	-	5.3	-	9
2	31.5	22.4	39.2	22.4	54	22.4	19.8	22.4	34.4	40	19.8	22.4	34.4	40	19.8	22.4	34.4	40	19.8	22.4	34.4
50	14.3	-	17.8	-	24.5	-	9	-	15.6	-	9	-	15.6	-	9	-	15.6	-	9	-	15.6
SIZE	ASME 1500 & 1687												ASME 2500 & 2680								
	Bolted Bonnet						Welded Bonnet						Bolted Bonnet			Welded Bonnet					
	Standard Bore				Full Bore		Standard Bore			Full Bore			Standard Bore			Standard Bore					
	in	WT	LB	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV
mm	FE	KG	WE	KG	WE		KG	WE		KG	WE		KG	WE		KG	WE		KG	WE	
¼	-	-	4.9	-	0.7	-	-	4.9	0.7	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	2.2	-	-	-	-	2.2	-	-	-	-	-	-	-	-	-	-	-	-	-
3/8	-	-	4.9	-	1.5	-	-	4.9	1.5	-	-	-	-	-	-	-	-	-	-	-	-
10	-	-	2.2	-	-	-	-	2.2	-	-	-	-	-	-	-	-	-	-	-	-	-
½	20.7	5.3	1.5	6.4	1.5	5.3	1.5	6.4	1.5	17.6	1.8	15.4	3								
13	9.4	2.4	-	2.9	-	2.4	-	2.9	-	8	-	7	-								
¾	24.7	6.4	2.7	10.1	2.7	6.4	2.7	10.1	2.7	17.2	1.9	15	3.1								
19	11.2	2.9	-	4.6	-	2.9	-	4.6	-	7.8	-	6.8	-								
1	31.7	10.1	5.1	14.3	5.1	10.1	5.1	14.3	5.1	26.5	3.2	24.3	6								
25	14.4	4.6	-	6.5	-	4.6	-	6.5	-	12	-	11	-								
1¼	35.3	14.3	9.1	23.1	9.1	14.3	9.1	23.1	9.1	43	4.3	39.7	10.5								
32	16	6.5	-	10.5	-	6.5	-	10.5	-	19.5	-	18	-								
1½	47.4	23.1	14	34.4	14	23.1	14	34.4	14	42.5	10.7	39	13.5								
38	21.5	10.5	-	15.6	-	10.5	-	15.6	-	19.3	-	17.7	-								
2	61.7	34.2	22.4	37.5	22.4	34.2	22.4	37.5	22.4	59.5	14.2	63.9	22.4								
50	28	15.5	-	17	-	15.5	-	17	-	27	-	29	-								

FE = Flanged Ends

WE = Socket Weld / Threaded Ends


WT = Weight

CV = Flow Coefficient

API 602 SWING CHECK VALVES

FORGED CARBON, STAINLESS STEEL OR ALLOY STEEL

1/4" - 2" (6 - 50mm), ASME CLASSES 150 - 2680

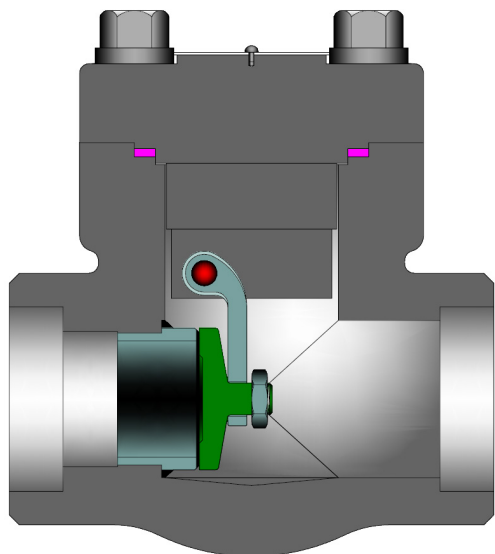

Class	Bore	Fig. No.
150	Standard	SW01
	Full	SWL1
300	Standard	SW03
	Full	SWL3
600	Standard	SW06
	Full	SWL6
800	Standard	SW08
	Full	SWL8
1500	Standard	SW15
	Full	SWL5
1680	Standard	SW16
2500	Standard	SW25
2690	Standard	SW26

DESIGN FEATURES:

- Standard trim is stellite faced seat rings and 13% chrome disc (API trim 8). Other trims available on request.
- Seat faces lapped for smooth finish and superior sealing.
- Wall thickness per heavy wall API 602 requirements.
- Swivel disc for improved seat alignment and longer life.
- Each valve is shell and seat pressure tested per industry standard API 598.
- Check valve are suitable for service in horizontal line with cap vertical or in a vertical line with flow upward.
- Carrier Pin is confined within the body wall and is not accessible from the exterior, thus no side body penetrations, eliminating a common leak path.

STANDARD MATERIALS (Other materials available)

PART	MATERIALS			
Body	A105	A182 F11	A182 F22	A182 F316 (1)
Cap	A105	A182 F11	A182 F22	A182 F316
Disc	A276 T420			A276 T316
Seat Ring	SST 410 + Stellite 6 Faced			316 SST
Gasket (2)	Spiral Wound SST with Graphite			Spiral Wound SST with PTFE
Carrier	304 SST			316 SST
Carrier Pin	304 SST			316 SST
Disc Nut	A182 F304 or A194 Gr. 8			A182 F316 or
				A194 Gr. 8M
Body / Cap Bolting (2)	A193 Gr. B7	A193 Gr. B16		A193 Gr. B8M
Identification Plate	Series 300 SST			


1. Threaded and weld end valve bodies A182 F316L
2. Welded bonnets also available.

NOTE: See page 43 for flow, safety and maintenance information.

Design Specifications

Item	Applicable Specification
Wall thickness	API 602
Pressure - temperature ratings	ASME B16.34
General valve design	API 602 & B16.34
End to End dimensions	ASME B16.10
Flange design	ASME B16.5
Thread design	ASME B1.20.1
Butt Weld design	ASME B16.25
Socket Weld design	ASME B16.11
Materials	ASTM

- End Flanges have the following raised faces per ASME B16.5:
 - Classes 150-300: 1/16" (2mm).
 - Classes 600: 1/4" (7mm).
- Other available options as follows:
 - » Alternate valve materials such as chrome and stainless steel alloys
 - » Alternate trim materials
 - » NACE service
 - » Special cleaning for applications such as oxygen or chlorine
 - » Other options available as specified

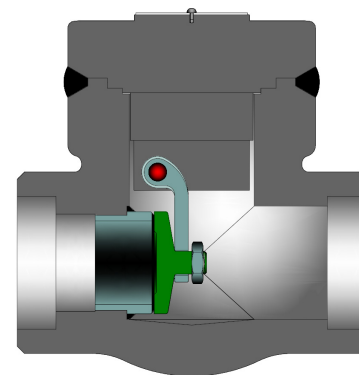


Welded Bonnet Design

SWING CHECK VALVE DIMENSIONS

(CLASSES 150 - 800)

SIZE	ASME 150			ASME 300			ASME 600		
	Bolted Bonnet			Bolted Bonnet			Bolted Bonnet		
	Standard Bore			Standard Bore			Standard Bore		
in	A	C	D	A	C	D	A	C	D
mm	FE			FE			FE		
½	4.25	2.2	0.39	6	2.2	0.39	6.5	2.2	0.39
13	108	55	10	152	55	10	165	55	10
¾	4.62	2.2	0.5	7	2.2	0.5	7.5	2.2	0.5
19	117	55	13	178	55	13	190	55	13
1	5	2.8	0.69	8	2.8	0.69	8.5	2.8	0.69
25	127	72	18	203	72	18	216	72	18
1¼	5.5	3.2	0.91	8.5	3.2	0.91	9	3.2	0.91
32	140	81	23	216	81	23	229	81	23
1½	6.5	3.6	1.12	9	3.7	1.12	9.5	3.7	1.12
38	165	91	29	229	94	29	241	94	29
2	8	4.4	1.26	10.5	4.4	1.38	11.5	4.4	1.38
50	203	112	32	267	112	35	292	112	35


SIZE	ASME 800											
	Bolted Bonnet						Welded Bonnet					
	Standard Bore			Full Bore			Standard Bore			Full Bore		
in	A	C	D	A	C	D	A	C	D	A	C	D
mm	WE			WE			WE					
¼	3.11	2.2	0.26	-	-	-	3.11	2.2	0.26	-	-	-
6	79	55	7	-	-	-	79	55	7	-	-	-
3/8	3.11	2.2	0.39	-	-	-	3.11	2.2	0.39	-	-	-
10	79	55	10	-	-	-	79	55	10	-	-	-
½	3.11	2.2	0.39	3.62	2.2	0.5	3.11	2.2	0.39	3.62	2.2	0.5
13	79	55	10	92	55	13	79	55	10	92	55	13
¾	3.62	2.2	0.5	4.37	3	0.69	3.62	2.2	0.5	4.37	3	0.69
19	92	55	13	111	72	18	92	55	13	111	72	18
1	4.37	3	0.69	4.72	3.2	0.91	4.37	3	0.69	4.72	3.2	0.91
25	111	72	18	120	81	23	111	72	18	120	81	23
1¼	4.72	3.2	0.91	4.72	3.7	1.12	4.72	3.2	0.91	4.72	3.7	1.12
32	120	81	23	120	94	29	120	81	23	120	94	29
1½	4.72	3.7	1.12	5.51	4.4	1.4	4.72	3.7	1.12	5.51	4.4	1.42
38	120	94	29	140	112	36	120	94	29	140	112	36
2	5.51	4.4	1.38	6.3	5.2	1.85	5.51	4.4	1.38	6.3	5.2	1.85
50	140	112	35	160	132	47	140	112	35	160	132	47

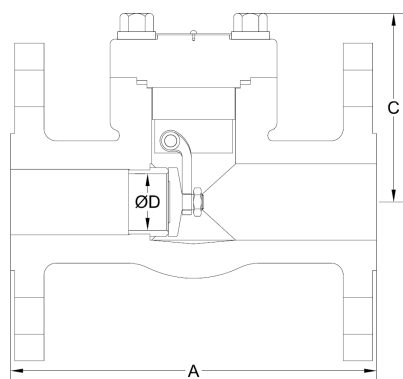

Bolted Bonnet Flanged Ends Design

WE = Socket Weld / Threaded Ends
FE = Flanged Ends

C = Center to top

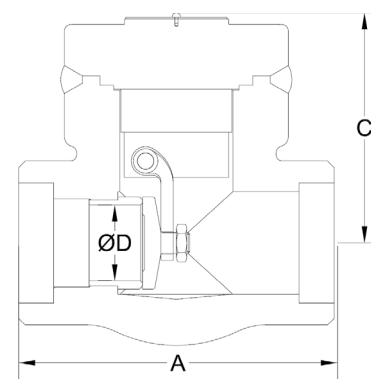

Welded Bonnet Socket Weld Ends Design

ADDITIONAL SIZES, MATERIALS AND CLASSES AVAILABLE UPON REQUEST.


2503 Spring Grove Avenue, Cincinnati, OH 45214 • 800.888.2583 • www.powellvalves.com

SWING CHECK VALVE DIMENSIONS

(CLASSES 1500 - 2860)

SIZE	ASME 1500 & 1690												
	Bolted Bonnet							Welded Bonnet					
	Standard Bore				Full Bore			Standard Bore			Full Bore		
in	A		C	D	A	C	D	A	C	D	A	C	D
mm	FE	WE			WE			WE			WE		
¼	-	3.11	2.9	0.26	-	-	-	3.11	2.9	0.39	-	-	-
6	-	79	73	7	-	-	-	79	65	10	-	-	-
3/8	-	3.11	2.9	0.39	-	-	-	3.11	2.9	0.5	-	-	-
10	-	79	73	10	-	-	-	79	65	13	-	-	-
½	8.5	3.62	2.9	0.39	4.37	2.9	0.5	3.62	2.9	0.39	4.37	2.9	0.5
13	216	92	73	10	111	73	13	92	65	10	111	65	13
¾	9	4.37	2.9	0.5	4.72	3.3	0.69	4.37	2.9	0.51	4.72	3.3	0.69
19	229	111	73	13	120	84	18	111	65	13	120	77	18
1	10	4.72	3.3	0.69	4.72	3.8	0.91	4.72	3.3	0.69	4.72	3.8	0.91
25	254	120	84	18	120	97	23	120	77	18	120	89	23
1¼	11	4.72	3.8	0.91	5.51	4.5	1.12	4.72	3.8	0.91	5.51	4.5	1.12
32	279	120	97	23	140	115	29	120	89	23	140	103	29
1½	12	5.51	4.5	1.12	6.3	5.2	1.38	5.51	4.5	1.12	6.3	5.2	1.38
38	305	140	115	29	160	132	35	140	103	29	160	115	35
2	14.5	6.3	5.2	1.38	8.66	5.2	1.85	6.3	5.2	1.38	8.66	5.2	1.85
50	368	160	132	35	220	152	47	160	115	35	220	132	47


SIZE	ASME 2500 & 2680							
	Bolted Bonnet			Welded Bonnet				
	Standard Bore			Standard Bore				
in	A		C	D	A		C	D
mm	WE				WE			
½	5.91		3.4	0.55	5.91		3.4	0.55
13	150		87	14	150		87	14
¾	5.91		3.6	0.55	5.91		3.4	0.55
19	150		92	14	150		87	14
1	6.69		4.4	0.75	6.69		3.6	0.75
25	170		113	19	170		92	19
1¼	7.87		4.4	1.1	7.87		4.4	1.1
32	200		113	28	200		113	28
1½	7.87		5.2	1.1	7.87		4.4	1.1
38	200		131	28	200		113	28
2	9.84		5.9	1.5	9.84		5.2	1.5
50	250		151	38	250		131	38

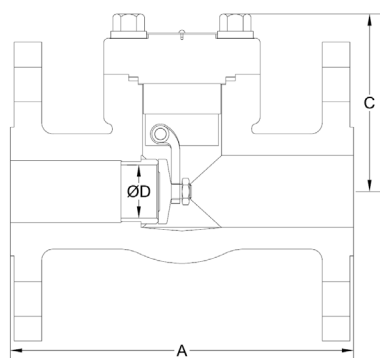

Bolted Bonnet Flanged Ends Design

WE = Socket Weld / Threaded Ends
FE = Flanged Ends

C = Center to top open

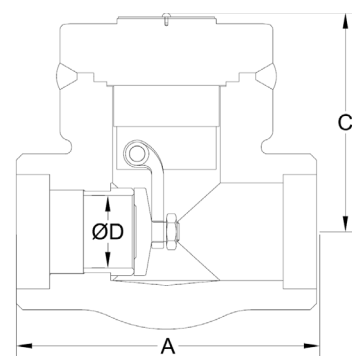

Welded Bonnet Socket Weld Ends Design

ADDITIONAL SIZES, MATERIALS AND CLASSES AVAILABLE UPON REQUEST.

2503 Spring Grove Avenue, Cincinnati, OH 45214 • 800.888.2583 • www.powellvalves.com

API 602 SWING CHECK VALVES

FORGED CARBON, STAINLESS STEEL OR ALLOY STEEL

1/4" - 2" (6 - 50mm), ASME CLASSES 150 - 2680

SIZE	ASME 150			ASME 300			ASME 600			ASME 800											
	Bolted Bonnet			Bolted Bonnet			Bolted Bonnet			Bolted Bonnet					Welded Bonnet						
	Standard Bore			Standard Bore			Standard Bore			Standard Bore			Full Bore		Standard Bore			Full Bore			
in	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV
mm	FE	KG		FE	KG		FE	KG		FE	KG		WE	KG		WE	KG		WE	KG	
¼	-	-	-	-	-	-	-	-	-	2.9	0.7	-	-	2.9	0.7	-	-	-	-	-	
6	-	-	-	-	-	-	-	-	-	1.3	-	-	-	1.3	-	-	-	-	-	-	
3/8	-	-	-	-	-	-	-	-	-	2.9	1.5	-	-	2.9	1.5	-	-	-	-	-	
10	-	-	-	-	-	-	-	-	-	1.3	-	-	-	1.3	-	-	-	-	-	-	
½	7.1	1.5	7.7	1.5	7.1	1.5	2.6	1.5	3.7	2.6	2.6	1.5	3.7	2.6	2.6	1.5	3.7	2.6	2.6	1.5	
13	3.2	-	3.5	-	3.2	-	1.2	-	1.7	-	1.2	-	1.7	-	1.2	-	1.7	-	1.7	-	
¾	9.3	2.7	10.1	2.7	12.3	2.7	3.7	2.7	5.3	4.9	3.7	2.7	5.3	4.9	3.7	2.7	5.3	4.9	5.3	4.9	
19	4.2	-	4.6	-	5.6	-	1.7	-	2.4	-	1.7	-	2.4	-	1.7	-	2.4	-	2.4	-	
1	17.6	5.1	19	5.1	20.5	5.1	5.3	5.1	8.8	8.9	5.3	5.1	8.8	8.9	5.3	5.1	8.8	8.9	8.8	8.9	
25	8	-	8.6	-	9.3	-	2.4	-	4	-	2.4	-	4	-	2.4	-	4	-	4	-	
1¼	19.2	9.1	20.7	9.1	22.5	9.1	8.8	9.1	11.2	13.7	8.8	9.1	11.2	13.7	8.8	9.1	11.2	13.7	11.2	13.7	
32	8.7	-	9.4	-	10.2	-	4	-	5.1	-	4	-	5.1	-	4	-	5.1	-	5.1	-	
1½	26	14	29.8	14	34	14	11.2	14	19.2	21.9	11.2	14	19.2	21.9	11.2	14	19.2	21.9	19.2	21.9	
38	11.8	-	13.5	-	15.4	-	5.1	-	8.7	-	5.1	-	8.7	-	5.1	-	8.7	-	8.7	-	
2	31.1	22.4	38.8	22.4	53.6	22.4	19.4	22.4	33.7	40	19.4	22.4	33.7	40	19.4	22.4	33.7	40	33.7	40	
50	14.1	-	17.6	-	24.3	-	8.8	-	15.3	-	8.8	-	15.3	-	8.8	-	15.3	-	15.3	-	

SIZE	ASME 1500 & 1687												ASME 2500 & 2680							
	Bolted Bonnet						Welded Bonnet						Bolted Bonnet			Welded Bonnet				
	Standard Bore			Full Bore			Standard Bore			Full Bore			Standard Bore			Standard Bore				
in	WT	LB	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV	WT	LB	CV
mm	FE	KG	WE	KG		WE	KG		WE	KG		WE	KG		WE	KG		WE	KG	
¼	-	-	4.9	0.7	-	-	4.4	0.7	-	-	-	-	-	-	-	-	-	-	-	-
6	-	-	2.2	-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	-	-
3/8	-	-	4.4	1.5	-	-	4.4	1.5	-	-	-	-	-	-	-	-	-	-	-	-
10	-	-	2	-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	-	-
½	20.3	4.9	1.5	6	1.5	4.4	1.5	6	1.5	16.1	1.8	14.3	3							
13	9.2	2.2	-	2.7	-	2	-	2.7	-	7.3	-	6.5	-							
¾	24.3	6	2.7	9.5	2.7	6	2.7	9.5	2.7	16.1	1.9	14.3	3.1							
19	11	2.7	-	4.3	-	2.7	-	4.3	-	7.3	-	6.5	-							
1	31.3	9.7	5.1	13.7	5.1	9.7	5.1	13.7	5.1	25.4	3.2	23.1	6							
25	14.2	4.4	-	6.2	-	4.4	-	6.2	-	11.5	-	10.5	-							
1¼	34.8	13.9	9.1	22.5	9.1	13.9	9.1	22.5	9.1	41.7	4.3	38.6	10.5							
32	15.8	6.3	-	10.2	-	6.3	-	10.2	-	18.9	-	17.5	-							
1½	47	22.7	14	33.7	14	22.7	14	33.7	14	41.7	10.7	38.6	13.5							
38	21.3	10.3	-	15.3	-	10.3	-	15.3	-	18.9	-	17.5	-							
2	61.3	33.7	22.4	36.8	22.4	33.7	22.4	36.8	22.4	58.9	14.2	62.8	22.4							
50	27.8	15.3	-	16.7	-	15.3	-	16.7	-	26.7	-	28.5	-							

FE = Flanged Ends

WE = Socket Weld / Threaded Ends

WT = Weight


CV = Flow Coefficient

API 602 Y-PATTERN PISTON CHECK VALVES

FORGED CARBON, STAINLESS STEEL OR ALLOY STEEL

1/4" - 2" (6 - 50mm)

ASME CLASSES 800 - 2680

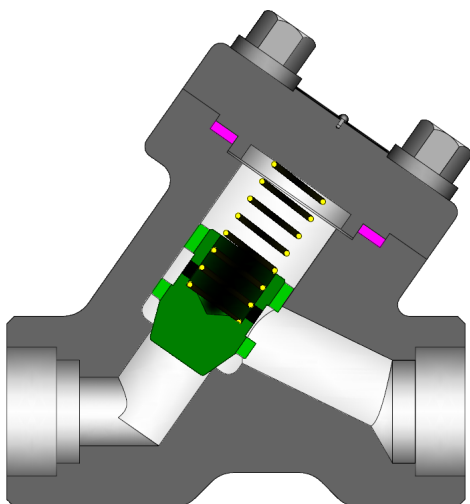

STANDARD MATERIALS (Other materials available)

PART	MATERIALS			
Body	A105 + Stellite 6 Faced	A182 F11 + Stellite 6 Faced	A182 F22 + Stellite 6 Faced	A182 F316 (1)
Cap	A105	A182 F11	A182 F22	A182 F316
Disc/Ball	A276 T420			A276 T316
Gasket (2)	Spiral Wound SST with Graphite			Spiral Wound SST with PTFE
Spring	Inconel 625			
Body / Cap Bolting (2)	A193 Gr. B7	A193 Gr. B16		A193 Gr. B8M
Identification Plate	Series 300 SST			

1. Threaded and weld end valve bodies A182 F316L
2. Welded bonnets also available.

Class	Bore	Fig. No.
800	Standard	YL08
	Full	YLL8
1500	Standard	YL15
	Full	YLL5
1680	Standard	YL16
2500	Standard	YL25
2690	Standard	YL26


NOTE: See page 43 for flow, safety and maintenance information.

Design Specifications

Item	Applicable Specification
Wall thickness	API 602
Pressure - temperature ratings	ASME B16.34
General valve design	API 602 & B16.34
End to End dimensions	ASME B16.10
Flange design	ASME B16.5
Thread design	ASME B1.20.1
Butt Weld design	ASME B16.25
Socket Weld design	ASME B16.11
Materials	ASTM

DESIGN FEATURES:

- Standard trim is stellite faced seat integral to the body and 13% chrome disc (API trim 8). Other trims available on request.
- Seat faces lapped for smooth finish and superior sealing.
- Wall thickness per heavy wall API 602 requirements.
- Each valve is shell and seat pressure tested per industry standard API 598.
- Check valve are suitable for service in horizontal line with cap vertical or in a vertical line with flow upward.
- End Flanges have the following raised faces per ASME B16.5:
 - Classes 150-300: 1/16" (2mm).
 - Classes 600: 1/4" (7mm).
- Y-Pattern features reduced flow restrictions compared to the upright design.
- Other available options as follows:
 - » Alternate valve materials such as chrome and stainless steel alloys.
 - » Alternate trim materials.
 - » NACE service.
 - » Special cleaning for applications such as oxygen or chlorine.
 - » Other options available as specified.

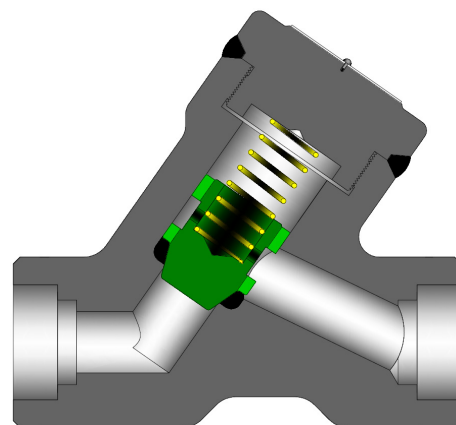

Welded Bonnet Design

Y-PATTERN PISTON CHECK VALVE DIMENSIONS



(CLASSES 800 - 2680)

SIZE	ASME 800					
	Bolted Bonnet			Welded Bonnet		
	Standard Bore			Standard Bore		
in	A	C	D	A	C	D
mm	WE			WE		
½	4.17	3.5	0.39	4.17	3	0.39
13	106	88	10	106	77	10
¾	4.17	3.5	0.5	4.17	3	0.5
19	106	88	13	106	77	13
1	4.72	4	0.69	4.72	3.5	0.69
25	120	101	18	120	88	18
1¼	5.98	4.9	0.91	5.98	4.3	0.91
32	152	124	23	152	108	23
1½	5.98	4.9	1.12	5.98	4.3	1.12
38	152	124	29	152	108	29
2	7.09	5.9	1.38	7.09	4.9	1.38
50	180	142	35	180	124	35

SIZE	ASME 1500 & 1690						ASME 2500 & 2680		
	Bolted Bonnet			Welded Bonnet			Welded Bonnet		
	Standard Bore			Standard Bore			Standard Bore		
in	A	C	D	A	C	D	A	C	D
mm	WE			WE			WE		
½	4.72	4.1	0.39	4.72	3.5	0.39	5.98	4.4	0.43
13	120	103	10	120	88	10	152	111	11
¾	4.72	4.1	0.5	4.72	3.5	0.5	5.98	4.4	0.55
19	120	103	13	120	88	13	152	111	14
1	5.98	5	0.69	5.98	4.3	0.69	7.09	5	0.75
25	152	126	18	152	108	18	180	128	19
1¼	5.98	5.7	0.91	5.98	4.3	0.91	7.87	5.7	0.98
32	152	146	23	152	108	23	200	145	25
1½	7.09	5.7	1.12	7.09	4.9	1.12	7.87	5.7	1.1
38	180	146	29	180	124	29	200	145	28
2	7.87	6.6	1.38	7.87	5.7	1.38	9.06	6.3	1.38
50	200	168	35	200	144	35	230	160	35

WE = Socket Weld / Threaded Ends

C = Center to top open

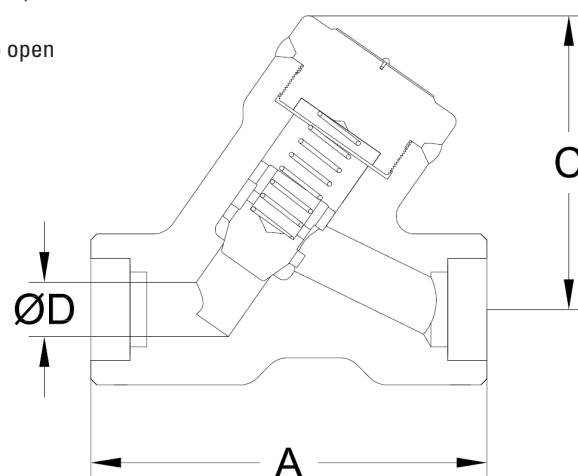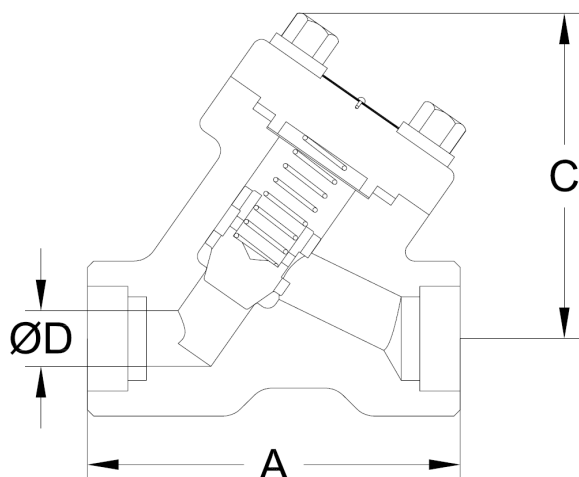

ADDITIONAL SIZES, MATERIALS AND CLASSES AVAILABLE UPON REQUEST.

2503 Spring Grove Avenue, Cincinnati, OH 45214 • 800.888.2583 • www.powellvalves.com

API 602 Y-PATTERN PISTON CHECK VALVES

FORGED CARBON, STAINLESS STEEL OR ALLOY STEEL

1/4" - 2" (6 - 50mm)

ASME CLASSES 800- 2680

SIZE	ASME 800					
	Bolted Bonnet			Welded Bonnet		
	Standard Bore			Standard Bore		
in	WT	LB	CV	WT	LB	CV
mm	WE	KG		WE	KG	
½	3.1		1.5	2.6		1.5
13	1.4			1.2		
¾	4.2		2.7	2.6		2.7
19	1.9			1.2		
1	5.7		5.1	4.4		5.1
25	2.6			2		
1¼	9.3		9.1	7.3		9.1
32	4.2			3.3		
1½	11.7		14	11		14
38	5.3			5		
2	19.8		22.4	15.4		22.4
50	9			7		

SIZE	ASME 1500 & 1687						ASME 2500 & 2680		
	Bolted Bonnet			Welded Bonnet			Welded Bonnet		
	Standard Bore			Standard Bore			Standard Bore		
in	WT	LB	CV	WT	LB	CV	WT	LB	CV
mm	WE	KG		WE	KG		WE	KG	
½	5.7		1.5	4.4		1.5	7.7		3
13	2.6			2			3.5		
¾	5.7		2.7	4.4		2.7	7.7		3.1
19	2.6			2			3.5		
1	9.3		5.1	7.3		5.1	13.7		6
25	4.2			3.3			6.2		
1¼	11.7		9.1	9.3		9.1	22.9		10.5
32	5.3			4.2			10.4		
1½	19.8		14	15.4		14	22.9		13.5
38	9			7			10.4		
2	25.4		22.4	20.9		22.4	32.2		22.4
50	11.5			9.5			14.6		

WE = Socket Weld / Threaded Ends

WT = Weight

CV = Flow Coefficient