



## KTM V-PORT CONTROL BALL VALVE

### FULL BORE AND REDUCED BORE

A rugged, long-life V-port control ball valve with excellent flow characteristics for various fluids including slurries and fibers



### FEATURES

- Rotary-valve design provides shearing action between the V-notch ball and the seat, promoting a smooth, non-clogging operation.
- Straight-through flow design provides high capacity for fluids.
- With a single-seat design, torque is lower than typical trunnion design valves, for ease of operation and reduced actuator cost.
- Two seat designs:
  - Laminated seat provides ASME/FCI 70-2 class IV shut-off and withstands tough operating conditions.
  - Thick (solid) seat for high-velocity and abrasive or erosive service.
- Segmented, V-notched ball features high rangeability and smooth throttling action.
- Choice of full and reduced port, providing the right flow capacity for every application at low cost.
- Machined ISO 5211 top mounting flange (VA series only).
- Heavy-duty, stainless steel shaft for high strength and rigidity.
- Multiple, adjustable ring packing allows easy adjustment without valve disassembly or actuator removal.
- Shaft bearings assure a durability, smooth and easy valve operation.
- Positive alignment of split body.
- The spline connection minimizes the backlash of shaft and disk. It results excellent control performance.

### GENERAL APPLICATION


Steam, liquids, gas or critical services in pulp and paper industry, fibrous materials, pellet slurry, high viscous solutions and other fluids having special characteristics.

### TECHNICAL DATA

Full bore:	VA11 / VA12 DN 25 - 200 (NPS 1 - 8) W0601 / W0602 DN 250 - 300 (NPS 10 - 12)
Reduced bore:	VA21 / VA22 DN 40 - 250 (NPS 1½ - 10) W0401 / W0402 DN 300 - 500 (NPS 12 - 20)
Temperature:	-29°C - 350°C (-20°F - 662°F)
Pressure rating:	ASME Class 150, 300 JIS 10K, 20K
Face to face:	ASME B16.10 Long pattern (full bore) ASME B16.10 Short pattern (reduced bore)

# KTM V-PORT CONTROL BALL VALVE

## FULL BORE AND REDUCED BORE

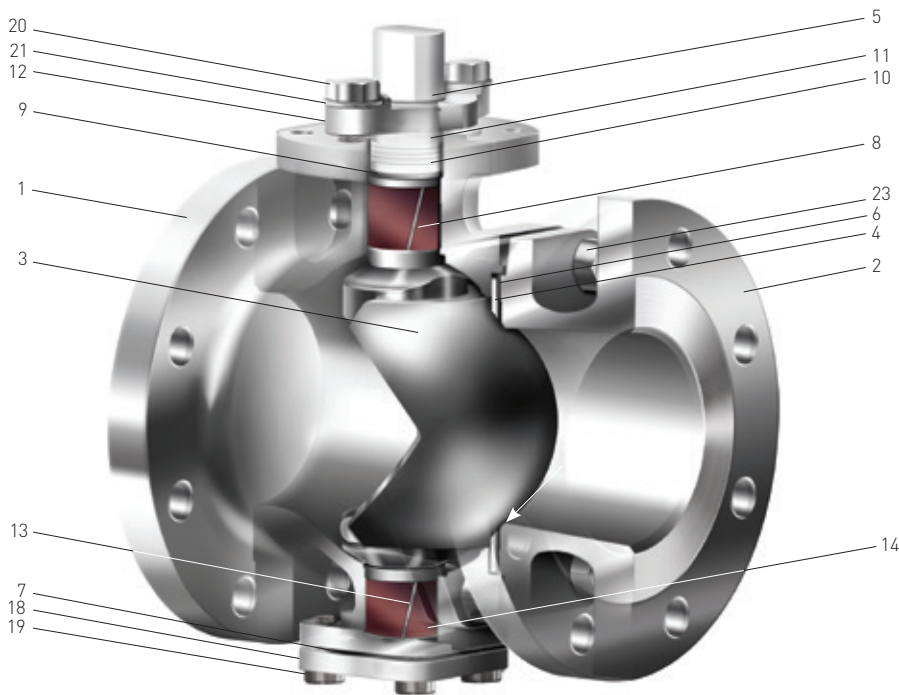

**Note:** the illustration shows body construction of V-port ball valve, Model VA11 in DN 100.

### PARTS LIST

No.	Description	Material
1	Body	CF8M, CF8 or WCB
2	Body cap	CF8M, CF8 or WCB
3	Disc	CF8M HCr or CF8M stellite
4	Seat	Laminated 316S/S or thick (solid) 316S/S stellite
5	Shaft	316S/S
6	Gasket	Non asbestos joint sheet (standard) or R-PTFE (option)
7	Gasket	Non asbestos joint sheet (standard) or R-PTFE (option)
8	Shaft bearing	R-PTFE
9	Thrust washer	316S/S
10	Gland packing	PTFE V-ring (standard) or expanded graphite (optional)
11	Packing washer	316S/S
12	Gland flange	CF8
13	Lower shaft	316S/S
14	Shaft bearing	R-PTFE
15	Thrust bearing	R-PTFE (Not shown on illustration)
16	Shim	316S/S (Not shown on illustration)
17	Pivot	316S/S (Not shown on illustration)
18	Lower cover	316S/S
19	Bolt	304S/S
20	Gland bolt	A193 (G) B8
21	Live loading spring	304S/S
22	Stud	A193 (G) B8 (Not shown on illustration)
23	Nut	A194 (G) 8

### OPTIONS


- Special tests
- X-ray (RT)
  - Liquid penetrant (PT)
  - Positive material identification (PMI)

### NOTES

1. Shaft and disc are connected by spline in Model VA11, VA12, W0601, and W0602 size up to DN 250 (NPS 10) and in Model VA21, VA22, W0401, and W0402 size up to DN 300 (NPS 12). For larger sizes, connections are by key.
2. Throttle lever or gear operator, not shown here, is required for manual operation.
3. For details of the trim, please refer to trim table on page 7.

# KTM V-PORT CONTROL BALL VALVE

FULL BORE AND REDUCED BORE - METRIC

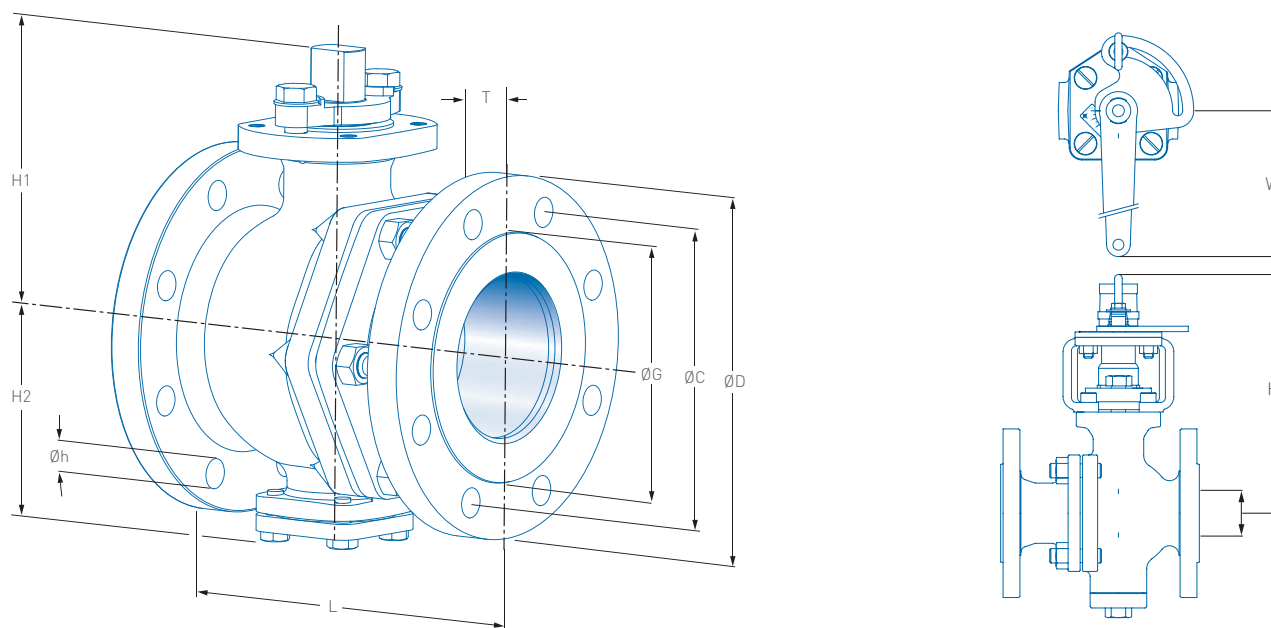

## ASME CLASS 150 / JIS 10K DIMENSIONS (mm)

DN	Full bore					Reduced bore					ASME flange dimensions						JIS flange dimensions						
	L	H1	H2	H	W	L	H1	H2	H	W	ØD	ØC	ØG	T	N	Øh	ØD	ØC	ØG	T	N	Øh	
<b>VA *</b>																							
25	127.0	88	62	167.5	160	-	-	-	-	-	108	79.5	51	11.2	4	16	125	90	67	14	4	19	
40	165.0	119	87	205.5	230	165	88	62	167.5	160	127	98.5	73	14.3	4	16	140	105	81	16	4	19	
50	178.0	124	92	210.5	230	178	119	87	205.5	230	152	120.5	92	15.9	4	19	155	120	96	16	4	19	
65	190.0	157	105	272.5	400	190	124	92	210.5	230	178	139.5	105	17.5	4	19	175	140	116	18	4	19	
80	203.0	163	111	278.5	400	203	157	105	272.5	400	190	152.2	127	19.1	4	19	185	150	126	18	8	19	
100	229.0	186	131	304.0	400	229	163	111	278.5	400	229	190.5	157	23.9	8	19	210	175	151	18	8	19	
125	356.0	256	167	419.0	1055	254	186	131	304.0	400	254	216.0	186	23.9	8	22	250	210	182	20	8	23	
150	394.0	269	180	431.0	1055	267	256	167	419.0	1055	279	241.5	216	25.4	8	22	280	240	212	22	8	23	
200	457.0	351	246	-	-	292	269	180	431.0	1055	343	298.5	270	28.6	8	22	330	290	262	22	12	23	
250	-	-	-	-	-	457	351	255	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
<b>W0 **</b>																							
250	533	361	271	-	-	-	-	-	-	-	406	362.0	324	30.2	12	25	400	355	324	24	12	25	
300	610	453	333	-	-	502	361	271	-	-	483	432.0	381	31.8	12	25	445	400	368	24	16	25	
350	-	-	-	-	-	572	453	333	-	-	533	476.0	413	35.0	12	29	490	445	413	26	16	25	
400	-	-	-	-	-	610	478	358	-	-	597	539.5	470	36.6	16	29	560	510	475	28	16	27	
450	-	-	-	-	-	660	538	412	-	-	635	578.0	533	39.7	16	32	620	565	530	30	20	27	
500	-	-	-	-	-	711	580	433	-	-	698	635.0	584	42.9	20	32	675	620	585	30	20	27	

## ASME CLASS 300 / JIS 20K DIMENSIONS (mm)

DN	Full bore					Reduced bore					ASME flange dimensions						JIS flange dimensions						
	L	H1	H2	H	W	L	H1	H2	H	W	ØD	ØC	ØG	T	N	Øh	ØD	ØC	ØG	T	N	Øh	
<b>VA *</b>																							
25	165	88	67	167.5	160	-	-	-	-	-	124	89.0	51	17.5	4	19	125	90	67	16	4	19	
40	190	119	94	205.5	230	190	88	67	167.5	160	156	114.5	73	20.7	4	22	140	105	81	18	4	19	
50	216	124	99	210.5	230	216	119	94	205.5	230	165	127.0	92	22.3	8	19	155	120	96	18	8	19	
65	241	157	110	272.5	400	241	124	99	210.5	230	190	149.0	105	25.4	8	22	175	140	116	20	8	19	
80	283	163	116	278.5	400	283	157	110	272.5	400	210	168.0	127	28.6	8	22	200	160	132	22	8	23	
100	305	186	136	304.0	400	305	163	116	278.5	400	254	200.0	157	31.8	8	22	225	185	160	24	8	23	
125	381	256	175	419.0	1055	381	186	136	304.0	400	279	235.0	186	35.0	8	22	270	225	195	26	8	25	
150	403	269	187	431.0	1055	403	256	175	419.0	1055	318	270.0	216	36.6	12	22	305	260	230	28	12	25	
200	502	351	255	-	-	419	269	187	431.0	1055	381	330.0	270	41.3	12	25	350	305	275	30	12	25	
250	-	-	-	-	-	457	351	255	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
<b>W0 **</b>																							
250	568	361	270	-	-	-	-	-	-	-	444	387.5	324	47.7	16	29	430	380	345	34	12	27	
300	-	-	-	-	-	502	361	280	-	-	521	451.0	381	50.8	16	32	480	430	395	36	16	27	


Notes: N = Number of bolts

\* = VA series

\*\* = W0 series

# KTM V-PORT CONTROL BALL VALVE

## FULL BORE AND REDUCED BORE - IMPERIAL

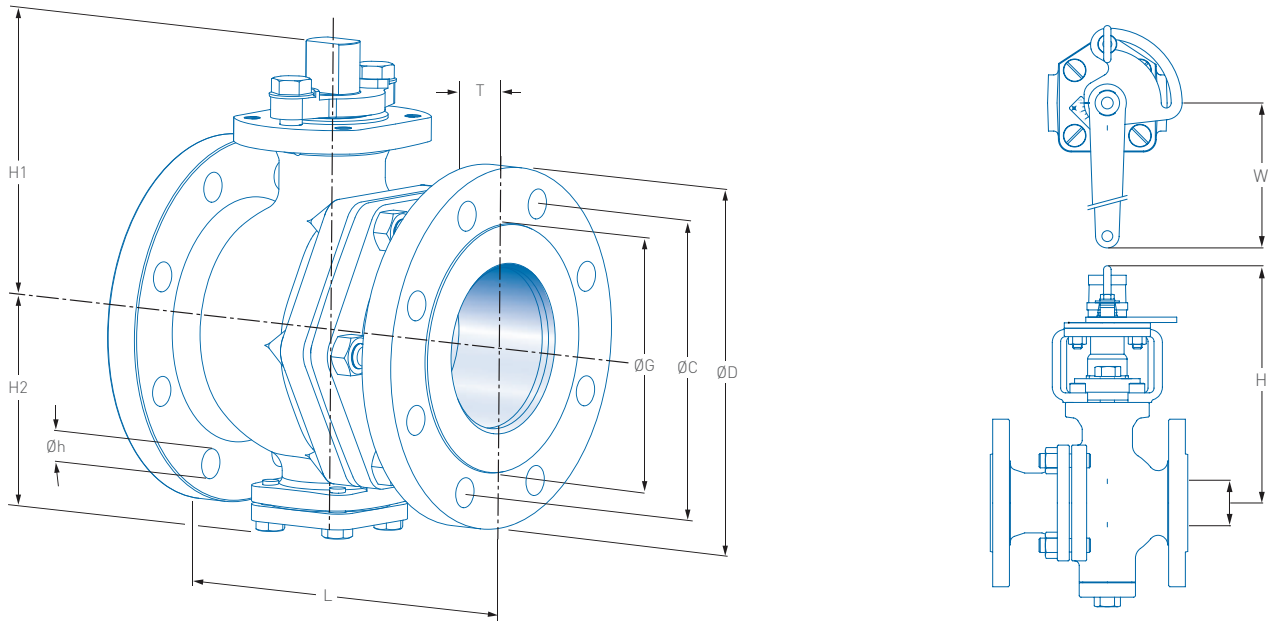

### ASME CLASS 150 / JIS 10K DIMENSIONS (inches)

NPS	Full bore					Reduced bore					ASME flange dimensions						JIS flange dimensions						
	L	H1	H2	H	W	L	H1	H2	H	W	ØD	ØC	ØG	T	N	Øh	ØD	ØC	ØG	T	N	Øh	
<b>VA *</b>																							
1	5.00	3.46	2.44	6.60	6.30	-	-	-	-	-	4.25	3.13	2.00	0.44	4	0.63	4.90	3.54	2.64	0.55	4	0.75	
1 ½	6.50	4.70	3.43	8.10	9.06	6.50	3.46	2.44	6.60	6.30	5.00	3.88	2.87	0.56	4	0.63	5.50	4.13	3.20	0.63	4	0.75	
2	7.00	4.90	3.60	8.30	9.06	7.00	4.670	3.43	8.10	9.06	6.00	4.74	3.60	0.63	4	0.75	6.10	4.72	3.80	0.63	4	0.75	
2 ½	7.50	6.20	4.15	10.73	15.75	7.50	4.908	3.60	8.30	9.06	7.00	5.50	4.13	0.69	4	0.75	6.90	5.50	4.57	0.71	4	0.75	
3	8.00	6.40	4.37	10.96	15.75	8.00	6.20	4.13	10.73	15.75	7.50	6.00	5.00	0.75	4	0.75	7.28	5.90	4.96	0.71	8	0.75	
4	9.00	7.30	5.16	11.97	15.75	9.00	6.40	4.37	10.96	15.75	9.00	7.50	6.20	0.94	8	0.75	8.27	6.90	5.94	0.71	8	0.75	
5	14.00	10.10	6.57	16.50	41.54	10.00	7.30	5.16	11.97	15.75	10.00	8.50	7.30	0.94	8	0.87	9.84	8.27	7.17	0.79	8	0.91	
6	15.50	10.60	7.10	16.97	41.54	10.50	10.08	6.57	16.50	41.54	11.00	9.50	8.50	1.00	8	0.87	11.00	9.45	8.35	0.87	8	0.91	
8	18.00	13.80	9.70	-	-	11.50	10.60	7.10	16.97	41.54	13.50	11.75	10.63	1.13	8	0.87	13.00	11.42	10.30	0.87	12	0.91	
10	-	-	-	-	-	13.00	13.80	9.70	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
<b>W0 **</b>																							
10	21.00	14.20	10.67	-	-	-	-	-	-	-	16.00	14.25	12.76	1.19	12	0.98	15.75	14.00	12.76	0.94	12	0.98	
12	24.00	17.83	13.10	-	-	19.76	14.20	10.67	-	-	19.00	17.00	15.00	1.25	12	0.98	17.52	15.75	14.50	0.94	16	0.98	
14	-	-	-	-	-	22.50	17.83	13.10	-	-	21.00	18.74	16.26	1.38	12	1.14	19.30	17.50	16.26	1.02	16	0.98	
16	-	-	-	-	-	24.00	18.80	14.10	-	-	23.50	21.24	18.50	1.44	16	1.14	22.05	20.10	18.70	1.10	16	1.06	
18	-	-	-	-	-	26.00	21.20	16.20	-	-	25.00	22.76	21.00	1.56	16	1.26	24.40	22.24	20.87	1.18	20	1.06	
20	-	-	-	-	-	28.00	22.83	17.05	-	-	27.50	25.00	23.00	1.69	20	1.26	26.57	24.40	23.03	1.18	20	1.06	

### ASME CLASS 300 / JIS 20K DIMENSIONS (inches)

NPS	Full bore					Reduced bore					ASME flange dimensions						JIS flange dimensions						
	L	H1	H2	H	W	L	H1	H2	H	W	ØD	ØC	ØG	T	N	Øh	ØD	ØC	ØG	T	N	Øh	
<b>VA *</b>																							
1	6.50	3.46	2.64	6.60	6.30	-	-	-	-	-	4.90	3.50	2.00	0.69	4	0.75	4.90	3.54	2.64	0.63	4	0.75	
1 ½	7.50	4.70	3.70	8.10	9.06	7.48	3.46	2.64	6.60	6.30	6.14	4.50	2.87	0.81	4	0.87	5.50	4.13	3.20	0.70	4	0.75	
2	8.50	4.90	3.90	8.30	9.06	8.50	4.70	3.70	8.10	9.06	6.50	5.00	3.60	0.88	8	0.75	6.10	4.70	3.80	0.70	8	0.75	
2 ½	9.50	6.18	4.33	10.73	15.75	9.50	4.90	3.90	8.30	9.06	7.50	5.87	4.13	1.00	8	0.87	6.90	5.50	4.57	0.80	8	0.75	
3	11.14	6.40	4.57	10.96	15.75	11.14	6.20	4.33	10.73	15.75	8.27	6.60	5.00	1.13	8	0.87	7.87	6.30	5.20	0.87	8	0.91	
4	12.00	7.30	5.35	11.97	15.75	12.00	6.40	4.57	10.96	15.75	10.00	7.87	6.20	1.25	8	0.87	8.86	7.30	6.30	0.94	8	0.91	
5	15.00	10.10	6.89	16.50	41.54	15.00	7.30	5.35	11.97	15.75	11.00	9.25	7.30	1.40	8	0.87	10.63	8.86	7.70	1.02	8	0.98	
6	15.87	10.60	7.36	16.97	41.54	15.87	10.08	6.90	16.50	41.54	12.50	10.63	8.50	1.44	12	0.87	12.00	10.24	9.06	1.10	12	0.98	
8	19.76	13.80	10.04	-	-	16.50	10.60	7.36	16.97	41.54	15.00	13.00	10.63	1.63	12	0.98	13.80	12.00	10.83	1.18	12	0.98	
10	-	-	-	-	-	18.00	13.80	10.00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
<b>W0 **</b>																							
10	22.36	14.20	10.63	-	-	-	-	-	-	-	17.50	15.26	12.76	1.90	16	1.14	16.93	14.96	13.58	1.34	12	1.06	
12	-	-	-	-	-	19.76	14.20	11.00	-	-	20.50	17.76	15.00	2.00	16	1.26	18.90	16.93	15.55	1.42	16	1.06	


Notes: N = Number of bolts      \* = VA series      \*\* = W0 series

# KTM V-PORT CONTROL BALL VALVE

## FULL BORE AND REDUCED BORE


### SEAT SELECTION

The KTM V-port valve is a single-seat design. Torque is lower than typical trunnion design valves resulting in easier operation and reduced actuator cost. Choose from two unique seat designs:



LAMINATED SEAT

Provides ASME/FCI 70-2 Class IV shut-off and withstands tough operating conditions.




THICK (SOLID) SEAT

For high-velocity, abrasive and erosive service. ASME/FCI 70-2 Class II shut-off.

Seat leakage for Laminated seat is equivalent to Class IV, however the actual test pressure seat leakage is 1.5 ml/inch\* and smaller (Hydro).  
\*inch is nominal port size

### INHERENT FLOW CHARACTERISTICS

V-port valves maintain an inherent flow characteristic, which is approximately midway between linear and equal percent.

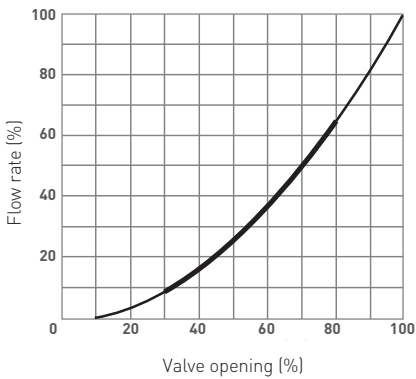

**NOTE**  
Bolded line shows a range of control

### MATERIALS SELECTION

Temperature*	Gland packing	Thrust bearing	Shaft bearing	Seat
Up to 200°C (392°F)	PTFE	R-PTFE	R-PTFE	Laminated /Thick seat
200°C - 250°C (392°F to 482°F)	R-PTFE	R-PTFE	R-PTFE	Laminated /Thick seat
Over 250°C (482°F)**	Graphite	Graphite	Stellite	Laminated /Thick seat

\* Laminated seat (Max. temp 300°C/572°F), Thick seat (Max. temp 350°C/662°F)

\*\* Please consult us for the details of temperature range above 250°C (482°F)

### TEST PRESSURE

Rating	Shell MPa (psi)		Seat MPa (psi)
	Carbon steel	Stainless steel	
ASME Class 150	3.10 (449.6)	2.93 (425)	Thick seat: 0.3 MPa (43.5 psi)
ASME Class 300	7.76 (1125.5)	7.58 (1099.4)	Laminated seat: Lower value out of comparison between A (Fluid pressure x 1.1) and B (MASP* for V-port valve). (0.3 MPa /43.5 psi unless otherwise stated.)
JIS 10K	2.10 (304.6)	2.10 (304.6)	
JIS 20K	5.10 (739.7)	5.10 (739.7)	

\* Maximum allowable shut off pressure (Please refer to page 6 for the details)

# KTM V-PORT CONTROL BALL VALVE


## FULL BORE AND REDUCED BORE

### MAX SHUT-OFF PRESSURE


Valve size DN (NPS)		Max. shut-off pressure MPa (psi)	
Full bore	Reduced bore	Laminated seat	Thick seat
25 (1)	40 (1½)	2.2 (319.1)	5 (725.2)
40 (1½)	50 (2)	2.2 (319.1)	5 (725.2)
50 (2)	65 (2½)	2.2 (319.1)	5 (725.2)
65 (2½)	80 (3)	2.2 (319.1)	5 (725.2)
80 (3)	100 (4)	2.1 (304.6)	5 (725.2)
100 (4)	125 (5)	2.0 (290.1)	5 (725.2)
125 (5)	150 (6)	1.9 (275.6)	5 (725.2)
150 (6)	200 (8)	1.7 (246.6)	5 (725.2)
200 (8)	250 (10)	1.5 (217.6)	2 (290.1)
250 (10)	300 (12)	1.3 (188.5)	2 (290.1)
300 (12)	350 (14)	1.2 (174.0)	2 (290.1)
-	400 (16)	1.0 (145.0)	2 (290.1)
-	450 (18)	0.8 (116.0)	2 (290.1)
-	500 (20)	0.6 (87.0)	2 (290.1)

### VALVE OPENING VS. FLOW COEFFICIENT C<sub>v</sub> (PIPE SIZE IS SAME AS VALVE SIZE)

#### LAMINATED SEAT

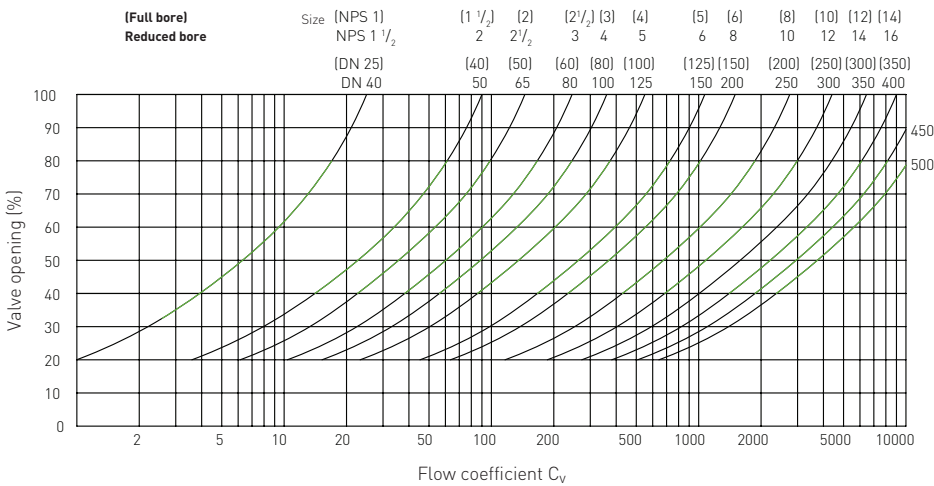

#### THICK SEAT

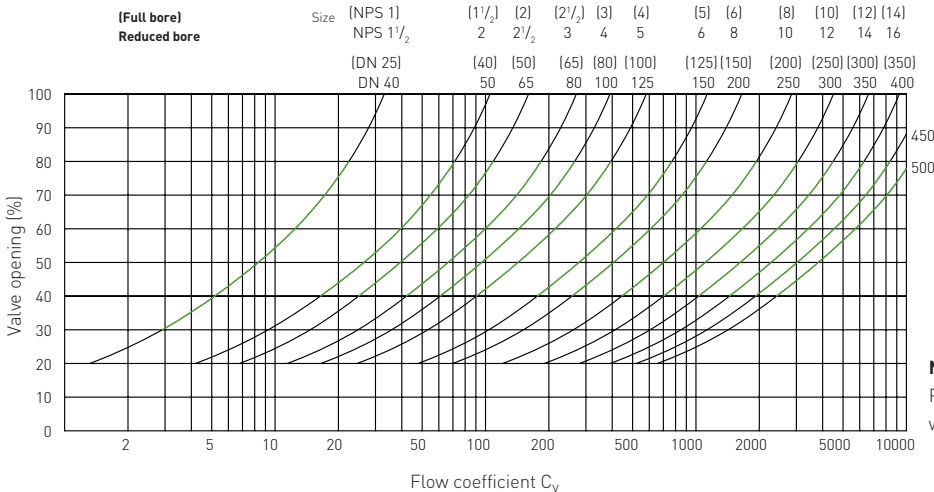

**NOTE**  
Please choose the valve in the range of green lines when you select the valve size.

# KTM V-PORT CONTROL BALL VALVE

## FULL BORE AND REDUCED BORE

### EFFECTIVE FLOW COEFFICIENT $C_v$ (FULL BORE: MODEL VA11, VA12, W0601, W0602)

Model	Valve size DN (NPS)	Pipe size = Valve size		Pipe size = 1.5 x Valve size		Pipe size = 2 x Valve size	
		Thick seat	Laminated seat	Thick seat	Laminated seat	Thick seat	Laminated seat
VA11/VA12	25 (1)	33	25	26	22	23	20
VA11/VA12	40 (1½)	105	90	72	66	60	57
VA11/VA12	50 (2)	160	145	118	112	101	97
VA11/VA12	65 (2½)	270	245	190	180	160	155
VA11/VA12	8 (3)	390	360	280	270	235	230
VA11/VA12	100 (4)	580	550	450	430	387	378
VA11/VA12	125 (5)	1130	1070	790	770	660	650
VA11/VA12	150 (6)	1650	1500	1140	1090	950	920
VA11/VA12	200 (8)	2850	2750	2000	1960	1680	1660
W0601/W0602	250 (10)	4500	4400	3140	3110	2630	2610
W0601	300 (12)	6600	6450	4560	4510	3820	3790

### EFFECTIVE FLOW COEFFICIENT $C_v$ (REDUCED BORE: MODEL VA21, VA22, W0401, W0402)

Model	Valve size DN (NPS)	Pipe size = Valve size		Pipe size = 1.5 x Valve size		Pipe size = 2 x Valve size	
		Thick seat	Laminated seat	Thick seat	Laminated seat	Thick seat	Laminated seat
VA21/VA22	40 (1½)	33	25	31	24	30	24
VA21/VA22	50 (2)	105	90	90	80	82	74
VA21/VA22	65 (2½)	160	145	140	130	130	120
VA21/VA22	80 (3)	270	245	220	210	200	190
VA21/VA22	100 (4)	390	360	340	320	310	300
VA21/VA22	125 (5)	580	550	510	490	470	460
VA21/VA22	150 (6)	1130	1070	920	890	810	790
VA21/VA22	200 (8)	1650	1500	1420	1320	1290	1220
VA21/VA22	250 (10)	2850	2750	2390	2330	2140	2100
W0401/W0402	300 (12)	4500	4400	3660	3610	3240	3210
W0401	350 (14)	6600	6450	5230	5140	4580	4530
W0401	400 (16)	9250	9000	7140	7020	6180	6110
W0401	450 (18)	12300	12000	9300	9170	8000	7910
W0401	500 (20)	15500	15200	11610	11490	9960	9880

### SIZING EQUATIONS

LIQUID:	$\Delta P < F_L^2 \cdot (P_1 - P_V)$	$C_v = \frac{Q_L}{0.0865 \sqrt{\Delta P}} \sqrt{\frac{G_L}{P_1 - P_V}}$
	$\Delta P \geq F_L^2 \cdot (P_1 - P_V)$	$C_v = \frac{Q_L}{0.0865 \cdot F_L \sqrt{P_1 - P_V}} \sqrt{\frac{G_L}{P_1 - P_V}}$
GAS:	$X < F_k \cdot X_T$	$C_v = \frac{Q_g}{4.17 \cdot P_1 \cdot Y} \sqrt{\frac{G_g \cdot T_1 \cdot Z}{X}}$
		$C_v = \frac{W}{0.948 \cdot P_1 \cdot Y} \sqrt{\frac{T_1 \cdot Z}{X \cdot M}}$
		$C_v = \frac{W}{2.73 \cdot Y \cdot \sqrt{X \cdot P_1 \cdot Y_1}}$
	$X \geq F_k \cdot X_T$	$C_v = \frac{Q_g}{2.78 \cdot P_1} \sqrt{\frac{G_g \cdot T_1 \cdot Z}{F_k \cdot X_T}}$
		$C_v = \frac{W}{0.632 \cdot P_1} \sqrt{\frac{T_1 \cdot Z}{F_k \cdot X_T \cdot M}}$
		$C_v = \frac{W}{1.82 \cdot \sqrt{F_k \cdot X_T \cdot P_1 \cdot Y_1}}$
SATURATED STEAM:	$X < F_k \cdot X_T$	$C_v = \frac{W}{0.138 \sqrt{\Delta P} \cdot (P_1 + P_2)}$
	$X \geq F_k \cdot X_T$	$C_v = \frac{W}{0.119 \cdot F_L \cdot P_1}$
SUPERHEATED STEAM:	$X < F_k \cdot X_T$	$C_v = \frac{W \cdot [1 + 0.00126 \cdot T_{sh}]}{0.138 \cdot \sqrt{\Delta P} \cdot (P_1 + P_2)}$
	$X \geq F_k \cdot X_T$	$C_v = \frac{W \cdot [1 + 0.00126 \cdot T_{sh}]}{0.119 \cdot F_L \cdot P_1}$

### NOTES

- $C_v$ : Flow coefficient
- $F_k$ : Specific heat ratio factor
- $F_L$ : Liquid pressure recovery factor of a control valve without attached fittings (V-ball: 0.6)
- $G_L$ : Liquid specific gravity at upstream condition
- $G_g$ : Gas specific gravity
- $M$ : Molecular mass of flowing fluid
- $P_1$ : Inlet absolute static pressure (KPaA)
- $P_2$ : Outlet absolute static pressure (KPaA)
- $\Delta P$ : Differential pressure ( $P_1 - P_2$ ) (KPaA)
- $P_V$ : Absolute vapour pressure of liquid at inlet temperature (KPaA)
- $Q_g$ : Gas volumetric flow rate (m<sup>3</sup>/h)
- $Q_L$ : Liquid volumetric flow rate (m<sup>3</sup>/h)
- $T_1$ : Inlet absolute temperature (°K) (273+°C)
- $T_{sh}$ : Degree of superheat (°C)
- $W$ : Mass flow rate (kg/h)
- $X$ : Ratio of pressure differential to inlet absolute pressure ( $\Delta P/P_1$ )
- $X_T$ : Pressure differential ratio factor of a control valve without attached fittings at choked flow (V-ball: 0.3)
- $Y$ : Expansion factor
- $Y = 1 - \frac{X}{3 \cdot F_k \cdot X_T}$
- $Z$ : Compressibility factor
- $Y_1$ : Density of fluid at  $P_1$  and  $T_1$  (kg/m<sup>3</sup>)

# KTM V-PORT CONTROL BALL VALVE

## FULL BORE AND REDUCED BORE

### PULP CONSISTENCY CORRECTION

Pulp consistency	Consistency correction factor $K_s$	
	Chemical stock	Mechanical stock
1	1.00	1.00
2	1.03	1.01
3	1.11	1.05
4	1.20	1.09
5	1.25	1.11

### NOTE

$Q_p = K_s Q$  where ' $K_s$ ' is correction factor and ' $Q$ ' is actual flow rate. Required  $C_v$  is determined by substituting this  $Q_p$  for  $Q_L$  in the sizing equations on page 7.

### TRIM TABLE

Bore type	Trim code*	Valve code	Size	Disc	Shaft	Seat
Full bore	3L	VA11, VA12	DN 25 - 200 (NPS 1 - 8)	CF8M HCr	316S/S	316S/S Laminated
		W0601, W0602	DN 250 (NPS 10)	CF8M HCr	316S/S	316S/S Laminated
		W0601	DN 300 (NPS 12)	CF8 HCr	304S/S	316S/S Laminated
	3S	VA11, VA12	DN 25 - 200 (NPS 1 - 8)	CF8M + Stellite	316S/S	316S/S + Stellite
		W0601, W0602	DN 250 (NPS 10)	CF8M + Stellite	316S/S	316S/S + Stellite
		W0601	DN 300 (NPS 12)	CF8 + Stellite	304S/S	304S/S + Stellite
	4L	VA11, VA12	DN 25 - 200 (NPS 1 - 8)	CF8M HCr	316S/S + Stellite	316S/S Laminated
		W0601, W0602	DN 250 (NPS 10)	CF8M HCr	316S/S + Stellite	316S/S Laminated
		W0601	DN 300 (NPS 12)	CF8 HCr	304S/S + Stellite	316S/S Laminated
	4S	VA11, VA12	DN 25 - 200 (NPS 1 - 8)	CF8M + Stellite	316S/S + Stellite	316S/S + Stellite
		W0601, W0602	DN 250 (NPS 10)	CF8M + Stellite	316S/S + Stellite	316S/S + Stellite
		W0601	DN 300 (NPS 12)	CF8 + Stellite	304S/S + Stellite	304S/S + Stellite
Reduced bore	3L	VA21, VA22	DN 40 - 250 (NPS 1½ - 10)	CF8M HCr	316S/S	Laminate**
		W0401, W0402	DN 300 (NPS 12)	CF8M HCr	316S/S	Laminate**
		W0401	DN 350 - 500 (NPS 14 - 20)	CF8 HCr	304S/S	Laminate**
	3S	VA21, VA22	DN 40 - 250 (NPS 1½ - 10)	CF8M + Stellite	316S/S	316S/S + Stellite
		W0401, W0402	DN 300 (NPS 12)	CF8M + Stellite	316S/S	316S/S + Stellite
		W0401	DN 350 - 500 (NPS 14 - 20)	CF8 + Stellite	304S/S	304S/S + Stellite
	4L	VA21, VA22	DN 40 - 250 (NPS 1½ - 10)	CF8M HCr	316S/S + Stellite	Laminate**
		W0401, W0402	DN 300 (NPS 12)	CF8M HCr	316S/S + Stellite	Laminate**
		W0401	DN 350 - 500 (NPS 14 - 20)	CF8 HCr	304S/S + Stellite	Laminate**
	4S	VA21, VA22	DN 40 - 250 (NPS 1½ - 10)	CF8M + Stellite	316S/S + Stellite	316S/S + Stellite
		W0401, W0402	DN 300 (NPS 12)	CF8M + Stellite	316S/S + Stellite	316S/S + Stellite
		W0401	DN 350 - 500 (NPS 14 - 20)	CF8 + Stellite	304S/S + Stellite	304S/S + Stellite

### NOTES

\* Code 3L and 4L for Laminated seat and 3S and 4S for Thick seat

\*\* The base materials are 316SS for DN 350 (NPS 14) and smaller sizes, and 304SS for DN 400 (NPS 16) and larger sizes

Size DN 40 (NPS 1½) or larger for WCB body

For ASME Class 300, full bore size up to DN 250 (NPS 10) and reduced bore size up to DN 300 (NPS 12) only

HCr: Hard chromium plating

Neither Emerson, Emerson Automation Solutions, nor any of their affiliated entities assumes responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

KTM is a mark owned by one of the companies in the Emerson Automation Solutions business unit of Emerson Electric Co. Emerson Automation Solutions, Emerson and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.