



FLOATING
BALL VALVE

BA-1402C (EN)

ABOUT US

FBV Inc. is an ISO 9001 certified company specializing in manufacturing industrial valves including ball valves, gate valves, globe valves, check valves, plug valves and butterfly valves in carbon steel, stainless steel, duplex stainless and alloy materials. Our products conform to the latest industry standards in accordance to ANSI, ASME and API.

FBV today has over 600,000 square feet of manufacturing facilities. Through its conviction to provide only the finest quality products and services to match the need of our customers, FBV has now established itself as a serious player in the valve business.

FBV INC has sold worldwide in North America, Europe, South America, South Asia, Africa and the Middle East. We consider product quality and customer satisfaction as our highest priority. We look forward to new customer relationships by providing value, quality, customer service, honesty, integrity and the commitment to maintain product consistency with each and every order.

MISSION STATEMENT

We at FBV, Inc. commit to taking ACTION:

- Adopt the latest technology to take the product quality to the next level;
- Consistently provide on-time services to our customers;
- Train and develop talented people with strong work ethics to deliver effective performance;
- Improve and enhance engineering designs to ensure product performance;
- Optimize management systems and increase productivity;
- Never forget our customer and employee needs.



FLOATING BALL VALVE

TABLE OF INDEX

PAGE

Introduction, <i>Features</i>	3-4
Overview, <i>Split Body</i>	5
Dimensions and Weights, <i>Class 150 (PN 20)</i>	6
Dimensions and Weights, <i>Class 300 (PN 50)</i>	7
Dimensions and Weights, <i>Class 600 (PN 100)</i>	8
Dimensions and Weights, <i>Class 900/1500 (PN 150/250)</i>	9
Overview, <i>Split Body (SW/NPT)</i>	10
Dimensions and Weights, <i>Class 800/1500 (Short Pattern)</i>	11
Dimensions and Weights, <i>Class 800/1500 (Long Pattern)</i>	12
Top Mounting Dimensions And Torque	13-14
Seat and Seal Material, <i>Selection Guide</i>	15
Valve Figure Number, <i>How To Order</i>	16-17

This page is intentionally left blank.

FLOATING BALL VALVE





INTRODUCTION

A ball valve is a valve with a spherical disc, the part of the valve which controls the flow through it. The sphere has a hole, or port, through the middle so that when the port is in line with both ends of the valve, flow will occur. When the valve is closed, the hole is perpendicular to the ends of the valve, and flow is blocked.

BLOWOUT PROOF STEM


The valve stem is made with a shoulder at the bottom end. It's securely retained by the valve body, to avoid that the stem, under certain operating conditions, accidentally blows out. Other designs are available on request.

Because the ball and stem in a ball valve are suspended on non-metallic parts, i.e. the seat seal and stem seal, there is a possibility a static charge may build up on the stem-ball, a mechanical (antistatic metal spring and ball) is introduced in the design to maintain the metal-to-metal contact between the rotating ball/stem and the valve body which will ground any charges to the valve body.

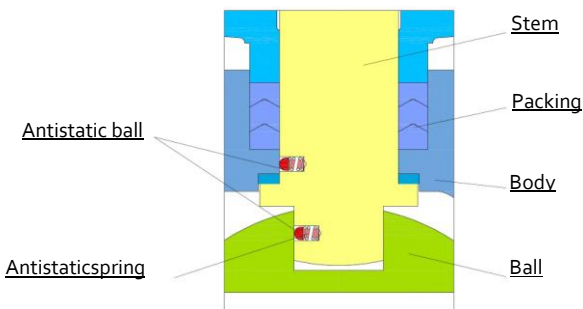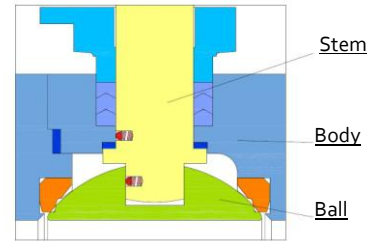

FIRE SAFE DESIGN

During a fire, non-metallic soft material will be burnt, subsequently seat leakage or external leakage may occur and cause the fire to spread or contaminate the environment. FBV ball valves are fire tested in accordance with API 6FA or API 607 witnessed and certified by TUV SUD.

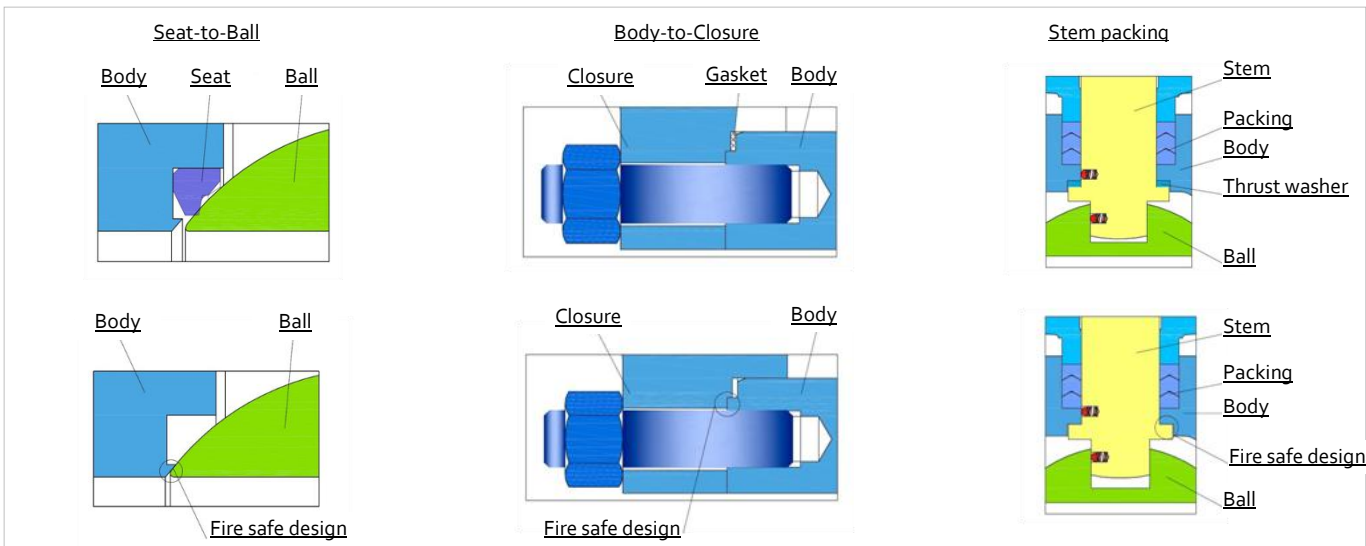

FLOATING BALL VALVE

SCOPE OF PRODUCTS

Legends: A – Available in Casting and Forging
 B – Available in Casting Only
 C – Available Forging Only
 D – Not Usually Required

Size in/mm	Class 150 PN 20	Class 300 PN 50	Class 600 PN 100	Class 800 PN 136	Class 900 PN 150	Class 1500 PN 250	Class 2500 PN 420
1/2 15	A	A	A	C	C	C	C
3/4 20	A	A	A	C	C	C	C
1 25	A	A	A	C	C	C	C
1 1/2 40	A	A	A	C	C	C	
2 50	A	A	A	C	C	C	
2.5 65	A	A	A				
3 80	A	A	AD				
4 100	A	A					
6 150	A	A					
8 150	AD						

FLOW COEFFICIENT

Nominal Size in/mm	Class 150 PN 20		Class 300 PN 50		Class 600 PN 100		Class 900 PN 150		Class 1500 PN 250	
	Cv	Kv	Cv	Kv	Cv	Kv	Cv	Kv	Cv	Kv
1/2 15	25	21	25	18	20	17	16	14	16	14
3/4 20	56	48	56	40	40	34	34	29	34	29
1 25	95	81	95	69	64	54	55	47	55	47
1 1/2 40	308	262	308	223	308	262	165	140	165	140
2 50	500	425	430	361	370	315	320	272	320	272
3 80	1,360	1,156	1,100	983	1,020	867	920	782	820	697
4 100	2,500	2,125	2,000	1,806	1,850	1,573	1,760	1,496	1,600	1,360
6 150	4,060	3,451	4,056	2,933	3,410	2,899	4,300	3,655	4,150	3,528

CALCULATION OF FLOW COEFFICIENT

Flow coefficient Cv (Kv is the metric equivalent) is the rate of flow in gallon per minute with the pressure drop of 1 psi across the valve. The flow coefficients shown in the above table are determined with equations as follows:

For liquids:

$$Q_l = C_v(\Delta P/SG)^{1/2}$$

Where:

Q_l = Flow of liquid (gallon/minute)
 ΔP = Pressure drop in psi (P₁-P₂)
 SG = Specific gravity (1 for liquid)

For gases (non-critical):

$$Q_g = 61 \cdot C_v(P_2 \cdot P_1 / SG)^{1/2}$$

Where:

Q_g = Flow of gases (SFH at STP)
 P₂ = Outlet pressure (psi)
 P₁ = Inlet pressure (psi)
 SG = Specific gravity (1 for gas)




FLOATING BALL VALVE

OVERVIEW

2-PIECE SPLIT BODY

Forge Steel

Casting Steel

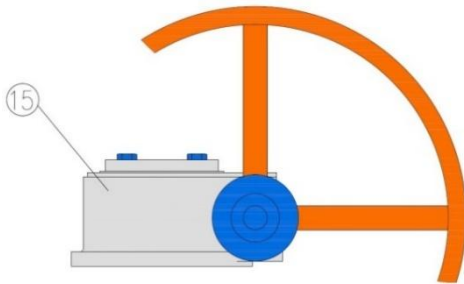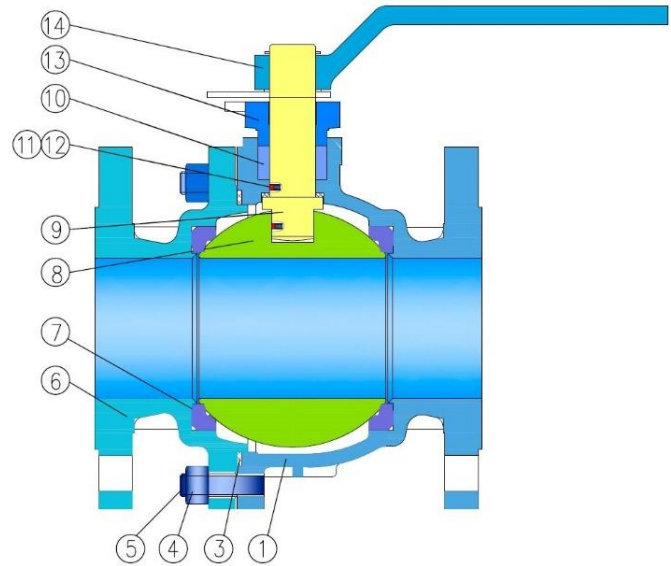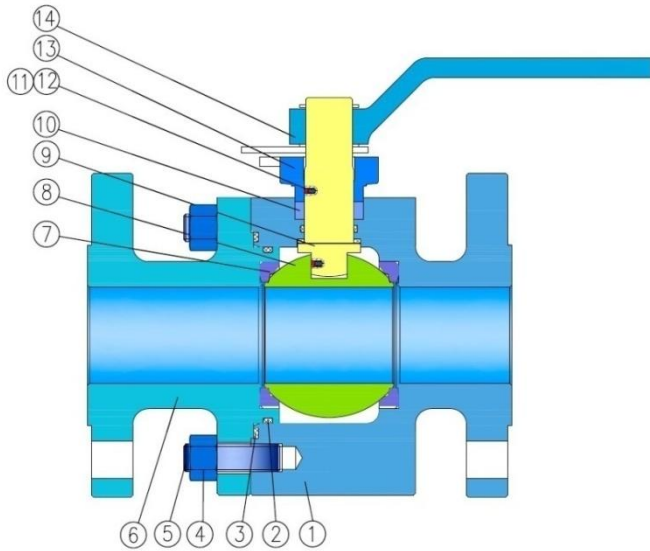

STANDARDS

Design & manufacture	API 6D, API 608, ISO 14313
Face-to-face	API 6D, ASME B16.10
End Dimension	ASME B16.5 (RF, RTJ) ASME B16.25 (BW)
Test & inspection	API 6D, API 598
Fire safe	API 6FA, API 607
Other	NACE MR 01-75, MR 0103

PART LIST

- | | |
|-----------|----------------------|
| ① Body | ⑨ Stem |
| ② O-ring | ⑩ Packing |
| ③ Gasket | ⑪ Anti-static Spring |
| ④ Nut | ⑫ Anti-static Ball |
| ⑤ Stud | ⑬ Gland Flange |
| ⑥ Closure | ⑭ Lever |
| ⑦ Seat | ⑮ Gearbox |
| ⑧ Ball | |


TYPICAL MATERIALS

Body/Closures	(Forging) A105, A182 F304, F304L, F316, F316L, F51, F53, A350 LF2, LF3, LF5, Inconel, Hastelloy, Monel (Casting) A216 WCB, A351 CF3, CF8, CF3M, CF8M, A352 LCB, LCC, LC2, A995 4A, 5A
Ball	CS+ENP, A182 F304, F304L, F316, F316L, F51, F53, CS/SS+TCC, CS/SS+Ni60
Seat retainer	CS+ENP, A182 F304, F304L, F316, F316L, F51, F53, CS/SS+TCC, CS/SS+Ni55
Seal Ring	PTFE, RPTFE, PCTFE, Devlon, PEEK
Stem	A182 F6a, F316, F51, A105+ENP, AISI 4140+ENP, 17-4PH, XM-19
Packing	Graphite, PTFE, RPTFE
O-ring	Viton, HNBR, FVMQ, AFLAS

FLOATING BALL VALVE

DIMENSIONS AND WEIGHTS

ASME CLASS 150 (PN 20)

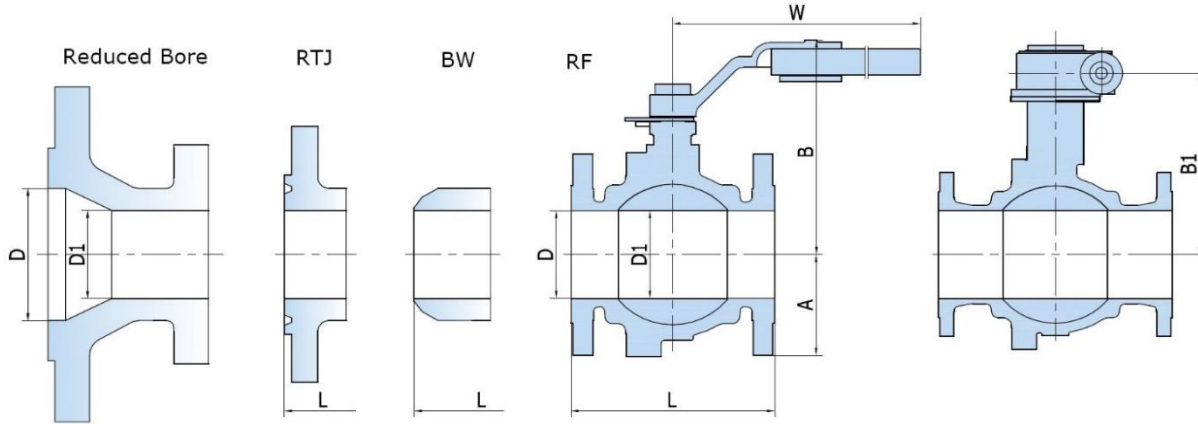

ASME CLASS 150 (PN 20) FULL BORE

Size in/mm	D	D1	L			Casting				Forging				Weight	
			RF	RTJ	BW	A	B	B1	W	A	B	B1	W	Casting (lb/ka)	Forging (lb/ka)
1/2	0.5	0.5	4.25	-	4.25	1.77	3.15	4.89	7.87	1.77	3.15	4.33	7.87	6	7
15	12.7	12.7	108	-	108	45	80	114	200	45	80	110	200	2.5	3
3/4	0.75	0.75	4.62	-	4.62	1.97	3.47	5.31	7.87	1.97	3.35	5.11	7.87	8	9
20	19.1	19.1	117	-	117	50	85	135	200	50	85	130	200	3.5	4
1	1	1	5	5.5	5	2.16	3.54	6.2	7.87	2.16	3.54	6.1	7.87	12	15
25	25.4	25.4	127	140	127	55	90	160	200	55	90	155	200	5.6	6.5
1 1/4	1.25	1.25	5.5	6	5.5	2.36	4.22	6.70	9.84	2.36	4.22	6.5	9.84	14	21
32	31.8	31.8	140	153	140	60	110	170	250	60	110	165	250	6.2	9.4
1 1/2	1.5	1.5	6.5	7	6.5	2.48	4.52	7.10	12	2.48	4.52	6.97	12	16	
40	38.1	38.1	165	178	165	63	115	180	330	63	115	177	330	7	12
2	1.94	1.94	7	7.5	7	3	5.9	7.5	13	3	5.6	7.32	13	29	
50	49	49	178	191	178	76	150	191	330	76	142	186	330	13	35
2 1/2	2.44	2.44	7.5	8	7.5	3.45	6.1	7.83	13	3.45	5.9	7.67	13	35	
65	62	62	191	203	191	85	155	200	330	85	150	195	330	16	20
3	2.91	2.91	8	8.5	8	3.74	6.3	8.46	13	3.74	6.1	8.1	13	49	
80	74	74	203	216	203	95	160	215	330	95	155	206	330	22	29
4	3.94	3.94	9	9.5	9	4.33	8.27	10.04	18.11	4.33	7.67	9.5	18.11	83	
100	100	100	229	242	229	110	210	255	460	110	195	242	460	37.5	106
6	5.91	5.91	15.5	16	15.5	6.70	12.2	12.87	30.3	6.70	11.22	12.44	30.3	216	
150	150	150	394	407	394	170	310	327	770	170	285	316	770	98	304
														138	

ASME CLASS 150 (PN 20) REDUCED BORE


Size in/mm	D	D1	L			Casting				Forging				Weight	
			RF	RTJ	BW	A	B	B1	W	A	B	B1	W	Casting (lb/ka)	Forging (lb/ka)
1/2	0.5	0.375	4.25	-	4.25	1.77	3.15	4.89	7.87	1.77	3.15	4.33	7.87	6	7
15	12.7	9.5	108	-	108	45	80	114	200	45	80	110	200	2.5	3
3/4	0.75	0.5	4.62	-	4.62	1.97	3.15	4.89	7.87	1.97	3.25	5.11	7.87	7	8
20	19.1	12.7	117	-	117	50	80	114	200	50	85	130	200	3	3.5
1	1	0.75	5	5.5	5	2.16	3.47	5.31	7.87	2.16	3.54	6.1	7.87	10	12
25	25.4	19.1	127	140	127	55	85	135	200	55	90	155	200	4.5	5.5
1 1/4	1.25	1	5.5	6	5.5	2.36	3.54	6.3	7.87	2.36	4.33	6.5	9.84	12	16
32	31.8	25.4	140	153	140	60	90	160	200	60	110	165	250	5.5	7.2
1 1/2	1.5	1.25	6.5	7	6.5	2.48	4.22	6.70	9.84	2.48	4.52	6.97	13	14	
40	38.1	31.8	165	178	165	63	110	170	250	63	115	177	330	6.3	8
2	1.94	1.5	7	7.5	7	3	4.53	7.10	13	3	5.6	7.32	13	20	
50	49	38.1	178	191	178	76	115	180	330	76	142	186	330	9	30
2 1/2	2.44	1.94	7.5	8	7.5	3.45	5.9	7.5	13	3.45	5.9	7.67	13	32	
65	62	49	191	203	191	85	150	191	330	85	150	195	330	14.5	17.5
3	2.91	1.94	8	8.5	8	3.74	6.1	7.83	13	3.74	6.1	8.1	13	42	
80	74	49	203	216	203	95	155	200	330	95	155	206	330	19	23
4	3.94	2.91	9	9.5	9	4.33	6.3	8.46	13	4.33	7.67	9.5	18.11	66	
100	100	74	229	242	229	110	160	215	330	110	195	242	460	30	38.5
6	5.91	3.94	15.5	16	15.5	6.70	8.27	10.04	18.11	6.70	11.22	12.44	30.3	133	
150	150	100	394	407	394	170	210	255	460	170	285	316	770	60	205
8	8	5.91	18	18.5	18	6.73	12.2	12.87	30.3	6.73	11.22	12.44	30.3	234	
201	201	150	457	470	457	175	310	327	770	175	285	316	770	106	289
														131	

- The dimension and weights are for reference only and subject to change without notice.
- Contact sales representative if further information is needed.

FLOATING BALL VALVE

DIMENSIONS AND WEIGHTS

ASME CLASS 300 (PN 50)

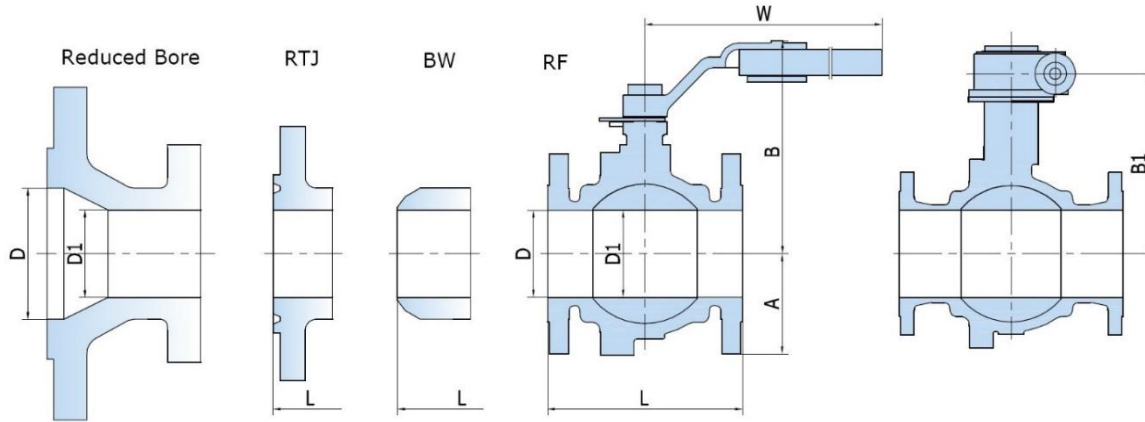

ASME CLASS 300 (PN 50) FULL BORE

Size in/mm	D	D1	L			Casting				Forging				Weight	
			RF	RTJ	BW	A	B	B1	W	A	B	B1	W	Casting (lb/kg)	Forging (lb/kg)
1/2	0.5	0.5	5.5	5.94	5.5	1.77	3.15	4.89	7.87	1.77	3.15	4.33	7.87	8	9
15	12.7	12.7	140	151	140	45	80	114	200	45	80	110	200	3.5	4
3/4	0.75	0.75	5.98	6.61	6	1.97	3.47	5.31	7.87	1.97	3.35	5.11	7.87	9	13
20	19.1	19.1	152	168	152	50	85	135	200	50	85	130	200	4	6
1	1	1	6.5	7.13	6.5	2.16	3.54	6.3	7.87	2.16	3.54	6.1	7.87	12	18
25	25.4	25.4	165	181	165	55	90	160	200	55	90	155	200	5.3	8
1 1/4	1.25	1.25	7	7.64	7	2.36	4.33	6.70	9.84	2.36	4.33	6.5	9.84	21	3
32	31.8	31.8	178	194	178	60	110	170	250	60	110	165	250	9.5	13.5
1 1/2	1.5	1.5	7.5	8.11	7.5	2.48	4.53	7.10	13	2.48	4.53	6.97	13	29	14.0
40	38.1	38.1	190	206	190	63	115	180	330	63	115	177	330	13	8
2	1.94	1.94	8.5	9.13	8.5	3	5.9	7.5	13	3	5.6	7.32	13	38	51
50	49	49	216	232	216	76	150	191	330	76	142	186	330	17	23
2 1/2	2.44	2.44	9.5	10.12	9.5	3.45	6.1	7.83	13	3.45	5.9	7.67	13	55	62
65	62	62	241	257	241	85	155	200	330	85	150	195	330	25	28
3	2.91	2.91	11.1	11.73	11.1	3.74	6.3	8.46	22.05	3.74	6.1	8.1	22.05	77	93
80	74	74	282	298	282	95	160	215	560	95	155	206	560	35	42
4	3.94	3.94	12	12.64	12	4.33	8.27	10.04	22.05	4.33	7.67	9.5	22.05	117	148
100	100	100	305	321	305	110	210	255	560	110	195	242	560	53	67
6	5.91	5.91	15.87	16.5	15.87	6.70	12.2	12.87	31.8	6.70	11.22	12.44	31.8	249	331
150	150	150	403	419	403	170	310	327	800	170	285	316	800	113	150

ASME CLASS 300 (PN 50) REDUCED BORE


Size in/mm	D	D1	L			Casting				Forging				Weight	
			RF	RTJ	BW	A	B	B1	W	A	B	B1	W	Casting (lb/kg)	Forging (lb/kg)
1/2	0.5	0.375	4.25	-	4.25	1.77	3.15	4.89	7.87	1.77	3.15	4.33	7.87	7	9
15	12.7	9.5	108	-	108	45	80	114	200	45	80	110	200	3.3	4.2
3/4	0.75	0.5	4.62	-	4.62	1.97	3.15	4.89	7.87	1.97	3.35	5.11	7.87	8	11
20	19.1	12.7	117	-	117	50	80	114	200	50	85	130	200	3.8	5
1	1	0.75	5	5.5	5	2.16	3.47	5.31	7.87	2.16	3.54	6.1	7.87	10	15
25	25.4	19.1	127	140	127	55	85	135	200	55	90	155	200	4.5	7
1 1/4	1.25	1	5.5	6	5.5	2.36	3.54	6.3	7.87	2.36	4.33	6.5	9.84	17	20
32	31.8	25.4	140	153	140	60	90	160	200	60	110	165	250	7.5	9
1 1/2	1.5	1.25	6.5	7	6.5	2.48	4.33	6.70	9.84	2.48	4.53	6.97	13	20	24
40	38.1	31.8	165	178	165	63	110	170	250	63	115	177	330	9	11
2	1.94	1.5	7	7.5	7	3	4.53	7.10	13	3	5.6	7.32	13	33	44
50	49	38.1	178	191	178	76	115	180	330	76	142	186	330	15	20
2 1/2	2.44	1.94	7.5	8	7.5	3.45	5.9	7.5	13	3.45	5.9	7.67	13	51	55
65	62	49	191	203	191	85	150	191	330	85	150	195	330	23	25
3	2.91	1.94	8	8.5	8	3.74	6.1	7.83	13	3.74	6.1	8.1	13	71	77
80	74	49	203	216	203	95	155	200	330	95	155	206	330	32	35
4	3.94	2.91	9	9.5	9	4.33	6.3	8.46	13	4.33	7.67	9.5	18.11	106	128
100	100	74	229	242	229	110	160	215	330	110	195	242	460	48	58
6	5.91	3.94	15.5	16	15.5	6.70	8.27	10.04	18.11	6.70	11.22	12.44	30.3	187	238
150	150	100	394	407	394	170	210	255	460	170	285	316	770	85	108
8	8	5.91	18	18.5	18	6.73	12.2	12.87	30.3	6.73	11.22	12.44	30.3	297	419
201	201	150	457	470	457	175	310	327	770	175	285	316	770	135	190

- The dimension and weights are for reference only and subject to change without notice.
- Contact sales representative if further information is needed.

FLOATING BALL VALVE

DIMENSIONS AND WEIGHTS

ASME CLASS 600 (PN 100)

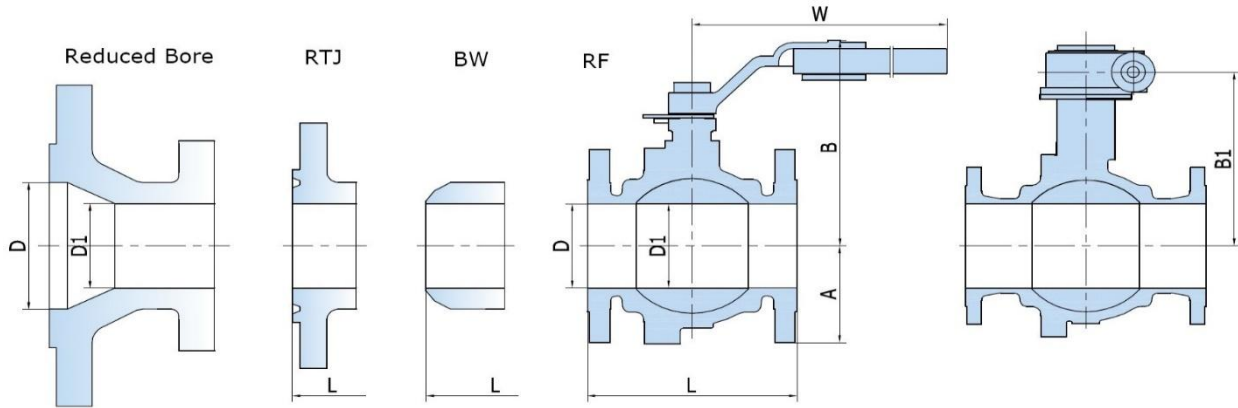

ASME CLASS 600 (PN 100) FULL BORE

Size in/mm	D	D1	L			Casting				Forging				Weight	
			RF	RTJ	BW	A	B	B1	W	A	B	B1	W	Casting (lb/kg)	Forging (lb/kg)
1/2	0.5	0.5	16.5	6.42	16.5	1.89	3.15	4.69	7.87	1.89	2.95	4.69	7.87	6	8
15	12.7	12.7	65	163	65	48	80	119	200	48	75	119	200	2.8	3.8
3/4	0.75	0.75	7.48	7.48	7.48	2.28	3.35	5.51	7.87	2.28	3.15	5.51	7.87	12	14
20	19.1	19.1	190	190	190	58	85	140	200	58	80	140	200	5.3	6.2
1	1	1	8.5	8.5	8.5	2.48	3.54	6.69	7.87	2.48	3.35	6.69	7.87	18	25
25	25.4	25.4	216	216	216	63	90	170	200	63	85	170	200	8	11.5
1 1/4	1.25	1.25	9.02	9.02	9.02	2.87	4.33	7.09	11.81	2.87	4.13	7.09	11.81	25	33
32	31.8	31.8	229	229	229	73	110	180	300	73	105	180	300	11	15
1 1/2	1.5	1.5	9.49	9.49	9.49	3.07	4.53	7.48	13	3.07	4.33	7.48	13	230	40
40	38.1	38.1	241	241	241	78	115	190	330	78	110	190	330	13.6	18
2	1.94	1.94	11.5	11.61	11.5	3.23	5.91	7.87	13	3.23	5.71	7.87	13	42	66
50	49	49	292	295	292	82	150	200	330	82	145	200	330	19	30
2 1/2	2.44	2.44	12.99	13.11	12.99	3.74	6.5	8.46	22.05	3.74	6.3	8.46	22.05	71	106
65	62	62	330	333	330	95	165	215	560	95	160	215	560	32	48
3	2.91	2.91	14.02	14.13	14.02	4.33	7.28	8.9	31.5	4.33	7.09	8.9	31.5	113	144
80	74	74	356	359	356	110	185	226	800	110	180	226	800	51	65

ASME CLASS 600 (PN 100) REDUCED BORE


Size in/mm	D	D1	L			Casting				Forging				Weight	
			RF	RTJ	BW	A	B	B1	W	A	B	B1	W	Casting (lb/kg)	Forging (lb/kg)
1/2	0.5	0.375	16.5	6.42	16.5	1.89	3.15	4.53	7.87	1.89	2.95	4.43	7.87	9	10
15	12.7	9.5	65	163	65	48	80	115	200	48	75	110	200	4	4.5
3/4	0.75	0.5	7.48	7.48	7.48	2.28	3.35	4.69	7.87	2.28	3.15	4.53	7.87	10	11
20	19.1	12.7	190	190	190	58	85	119	200	58	80	115	200	4.5	4.8
1	1	0.75	8.5	8.5	8.5	2.48	3.54	5.51	7.87	2.48	3.35	5.31	7.87	14	20
25	25.4	19.1	216	216	216	63	90	140	200	63	85	135	200	6.5	9
1 1/4	1.25	1	9.02	9.02	9.02	2.87	4.33	6.69	7.87	2.87	4.13	6.5	7.87	19	28
32	31.8	25.4	229	229	229	73	110	170	200	73	105	165	200	8.5	12.5
1 1/2	1.5	1.25	9.49	9.49	9.49	3.07	4.53	7.09	11.81	3.07	4.33	6.89	11.81	23	33
40	38.1	31.8	241	241	241	78	115	180	300	78	110	175	300	10.5	15
2	1.94	1.5	11.5	11.61	11.5	3.23	5.91	7.48	13	3.23	5.71	7.28	13	35	46
50	49	38.1	292	295	292	82	150	190	330	82	145	185	330	16	21
2 1/2	2.44	1.94	12.99	13.11	12.99	3.74	6.5	7.87	13	3.74	6.3	7.68	13	58	66
65	62	49	330	333	330	95	165	200	330	95	160	195	330	26.5	30
3	2.91	1.94	14.02	14.13	14.02	1.89	7.28	8.46	22.05	4.33	7.09	8.27	22.05	84	79
80	74	49	356	359	356	48	185	215	560	110	180	210	560	38	36
4	3.94	2.91	17	17.13	17	5.43	16.93	8.9	31.5	5.43	16.93	8.66	31.5	137	174
100	100	74	432	435	432	138	230	226	800	138	230	220	800	62	79

- The dimension and weights are for reference only and subject to change without notice.
- Contact sales representative if further information is needed.

FLOATING BALL VALVE

DIMENSIONS AND WEIGHTS

ASME CLASS 900/1500 (PN 150/2500)

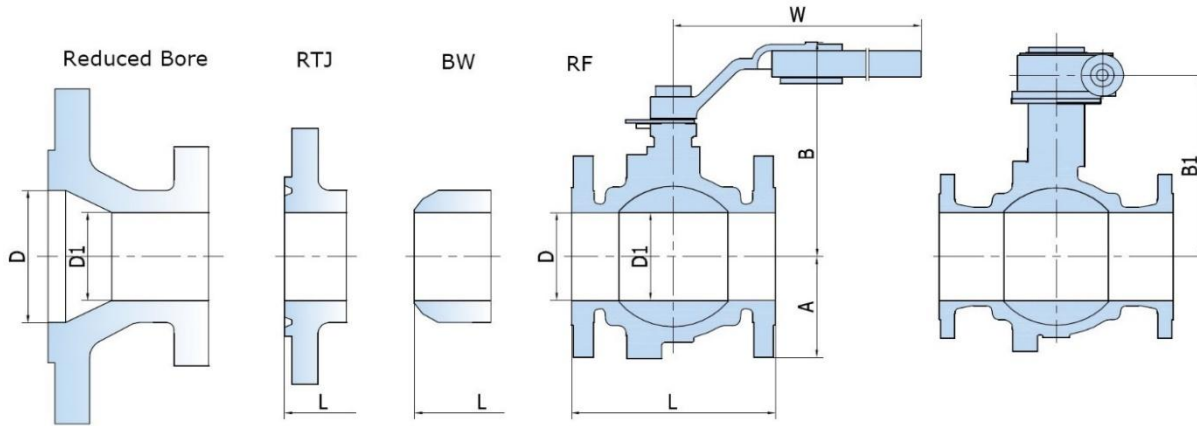

ASME CLASS 900/1500 (PN 150/250) FULL BORE

Size in/mm	D	D1	L			Casting				Forging				Weight	
			RF	RTJ	BW	A	B	B1	W	A	B	B1	W	Casting (lb/kg)	Forging (lb/kg)
1/2 15	0.5 12.7	0.5 12.7	8.5 216	8.5 216	8.5 216	-	-	-	-	2.36 60	2.76 70	-	7.87 200	-	20 9
3/4 20	0.75 19.1	0.75 19.1	9.02 229	9.02 229	9.02 229	-	-	-	-	2.56 65	3.03 77	-	9.84 250	-	24 11
1 25	1 25.4	1 25.4	10 254	10 254	10 254	-	-	-	-	2.95 75	3.35 85	-	9.84 250	-	42 19
1 1/4 32	1.25 31.8	1.25 31.8	10.98 279	10.98 279	10.98 279	-	-	-	-	3.15 80	3.74 95	-	13 330	-	59 27
1 1/2 40	1.5 38.1	1.5 38.1	12.01 305	12.01 305	12.01 305	-	-	-	-	3.54 90	4.33 110	-	19.69 500	-	71 32
2 50	1.94 49	1.94 49	14.49 368	14.61 371	14.49 368	-	-	-	-	4.25 108	5.31 135	-	24 610	-	121 55

ASME CLASS 900/1500 (PN 150/250) REDUCED BORE


Size in/mm	D	D1	L			Casting				Forging				Weight	
			RF	RTJ	BW	A	B	B1	W	A	B	B1	W	Casting (lb/kg)	Forging (lb/kg)
1/2 15	0.5 12.7	0.375 9.5	8.5 216	8.5 216	8.5 216	-	-	-	-	2.36 60	2.76 70	-	7.87 200	-	16.5 7.5
3/4 20	0.75 19.1	0.5 12.7	9.02 229	9.02 229	9.02 229	-	-	-	-	2.36 60	2.76 70	-	7.87 200	-	20 9
1 25	1 25.4	0.75 19.1	10 254	10 254	10 254	-	-	-	-	2.56 65	3.03 77	-	9.84 250	-	29 13
1 1/4 32	1.25 31.8	1 25.4	10.98 279	10.98 279	10.98 279	-	-	-	-	2.95 75	3.35 85	-	9.84 250	-	40 18
1 1/2 40	1.5 38.1	1.25 31.8	12.01 305	12.01 305	12.01 305	-	-	-	-	3.15 80	3.74 95	-	13 330	-	53 24
2 50	1.94 49	1.5 38.1	14.49 368	14.61 371	14.49 368	-	-	-	-	3.54 90	4.33 110	-	19.69 500	-	95 43
2 1/2 65	2.44 62	1.94 49	16.5 419	16.61 422	16.5 419	-	-	-	-	4.25 108	5.31 135	-	24 610	-	137 62

1. The dimension and weights are for reference only and subject to change without notice.
2. Contact sales representative if further information is needed.

FLOATING BALL VALVE

OVERVIEW

3-PIECE SPLIT BODY

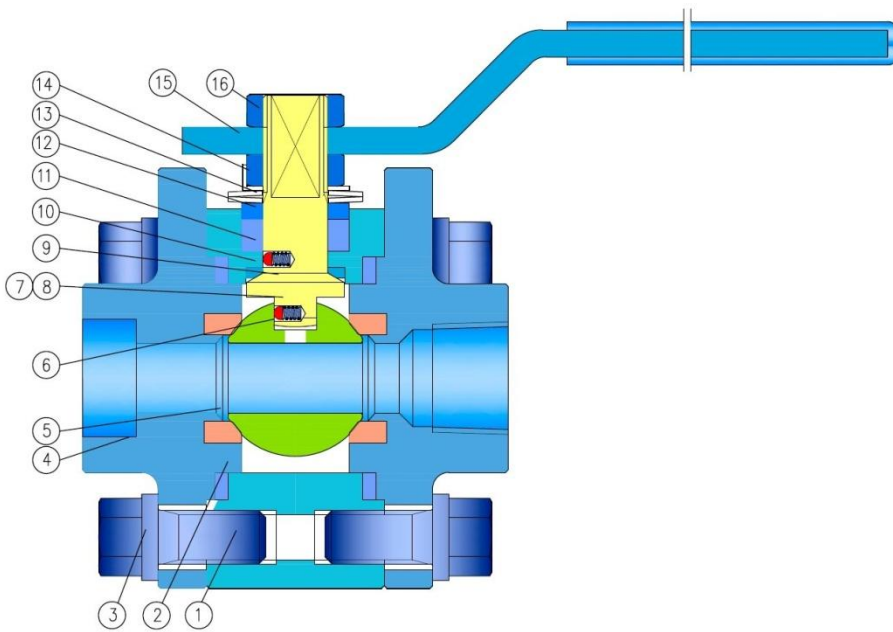

PART LIST

- ① Body
- ② Gasket
- ③ Bolt
- ④ Closure
- ⑤ Seat
- ⑥ Ball
- ⑦ Anti-static Spring
- ⑧ Anti-static Ball
- ⑨ Stem
- ⑩ Thrust Washer
- ⑪ Packing
- ⑫ Packing Gland
- ⑬ Belleville Spring
- ⑭ Stopper Washer
- ⑮ Lever
- ⑯ Nut

Floating Ball with 3 Piece design is provided in forged material in long pattern and short pattern.

Short Pattern: Mainly applies for soft seated with lever operation.

Long Pattern: Can be applied for metal seat, stem extension, or bare stem, or actuated ball valves, or full welded and butt welded;

STANDARDS

Design & manufacture	API 608, ISO 17292, ASME B16.34,
Face-to-face	MFG' STD
End Dimension	ASME B1.20.1 (NPT) ASME B16.11 (SW) ASME B16.25 (BW) Or ASME B36.10(BW)
Test & inspection	API 598
Fire safe	API 6FA, API 607
Other	NACE MR 01-75, MR 0103


TYPICAL MATERIALS

Body/Closures	(Forging) A105, A182 F304, F304L, F316, F316L, F51, F53, A350 LF2, LF3, LF5, Inconel, Hastelloy, Monel
Ball	A182 F304, F304L, F316, F316L, F51, F53, CS/SS+TCC, CS/SS+Ni60
Seal Ring	PTFE, RPTFE, PCTFE, Devlon, PEEK
Stem	F316, F51, 17-4PH, XM-19
Packing	Graphite, PTFE, RPTFE
O-ring	Viton, HNBR, FVMQ, AFLAS

FLOATING BALL VALVE

DIMENSIONS AND WEIGHT (SW/NPT - Short Pattern)

ASME CLASS 800/ CLASS1500

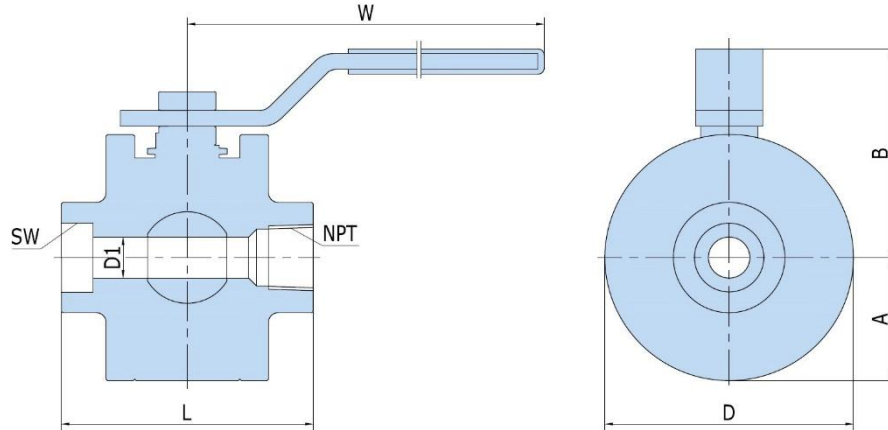

ASME CLASS 800 (PN136)

Size in/mm	D1	L		Forging				Weight SW / NPT (lb/kg)
		SW / NPT	A	B	D	W		
1/2	0.5	3.11	1.57	2.56	3.15	7.87	6.5	
15	12.7	79	40	65	80	200	2.9	
3/4	0.75	3.62	1.67	3.03	3.35	7.87	8.6	
20	19.1	92	42.5	77	85	200	3.9	
1	1	4.37	1.87	3.35	3.7	7.87	12	
25	25.4	111	47	85	94	200	5.6	
1 1/4	1.25	5.51	2.2	3.74	4.33	11.81	20	
32	31.8	140	56	95	110	300	9	
1 1/2	1.5	5.51	2.42	4.33	4.48	11.81	26	
40	38.1	140	61.5	110	123	300	11.8	
2	1.94	5.98	2.93	5.31	5.87	13	41	
50	49	152	74.5	135	149	330	18.5	

1. Face to Face dimension for pressure rating CL150~CL600 SW/NPT ball valve can refer to the dimension specified on table above for CL800.
2. The face to face and outline dimension for reduce ball valve are the same as full bore ball valve, just the flow port dimension has been reduced.
3. Short Pattern only applies to the SW/NPT soft seat ball valve with lever operation.

ASME CLASS1500 (PN 250)


Size in/mm	D	L		Forging				Weight SW / NPT (lb/kg)
		SW / NPT	A	B	D	W		
1/2	0.5	3.62	1.65	3.11	3.31	7.87	9	
15	12.7	92	42	79	84	200	3.9	
3/4	0.75	4.37	1.93	3.46	3.74	9.84	13	
20	19.1	111	49	88	95	250	5.9	
1	1	5	2.09	3.54	4.17	9.84	18	
25	25.4	127	53	90	106	250	8.3	
1 1/4	1.25	5.51	2.44	4.53	4.33	13	30	
32	31.8	140	62	115	110	330	13.5	
1 1/2	1.5	5.98	2.76	5.12	5.51	19.3	38	
40	38.1	152	70	130	140	490	17	
2	1.94	7.01	3.31	5.91	6.61	24	63	
50	49	178	84	150	168	610	28.3	

1. The face to face and outline dimension for reduce ball valve are the same as full bore ball valve, just the flow port dimension has been reduced.
2. Short Pattern only applies to the SW/NPT soft seat ball valve with lever operation.

FLOATING BALL VALVE

DIMENSIONS AND WEIGHT (SW/NPT - Long Pattern)

ASME CLASS 800/CLASS1500

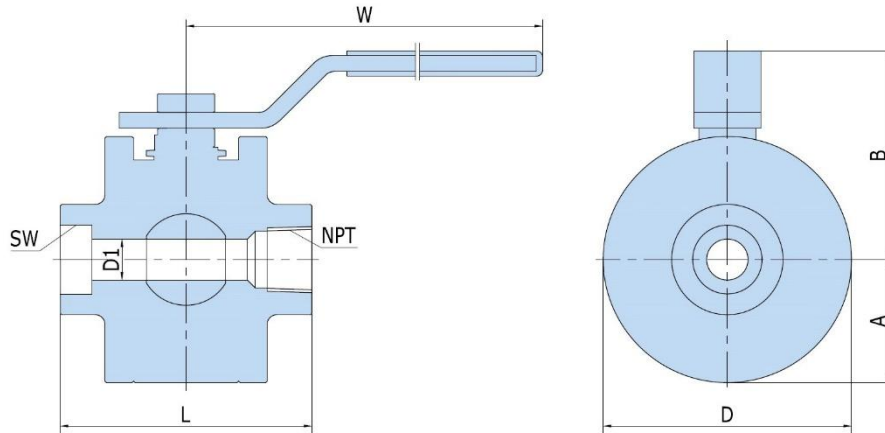

ASME CLASS 800 (PN136)

Size in/mm	D1	L SW / NPT	Forging				Weight SW / NPT (lb/kg)
			A	B	D	W	
1/2	0.5	4.25	1.89	3.44	3.78	7.87	12
15	12.7	108	48	87.5	96	200	5.5
3/4	0.75	4.61	2.07	3.54	4.13	7.87	13
20	19.1	117	52.5	90	105	200	5.8
1	1	5	2.17	3.64	4.33	7.87	15
25	25.4	127	55	92.5	110	200	6.7
1 1/4	1.25	5.51	2.64	5.12	5.28	11.81	29
32	31.8	140	67	130	134	300	13
1 1/2	1.5	6.5	3.05	5.91	6.1	11.81	36
40	38.1	165	77.5	150	155	300	16
2	1.94	7.01	3.25	6.69	6.5	13	51
50	49	178	82.5	170	165	330	23

1. Face to Face dimension for pressure rating CL150~CL600 SW/NPT ball valve can refer to the dimension specified on table above for CL800.
2. The face to face and outline dimension for reduce ball valve are the same as full bore ball valve.
3. Long pattern can be applied to the ball valve with structure of metal seat, stem extension, or bare stem, or actuated ball valves, or full welded and butt welded.

ASME CLASS1500 (PN 250)


Size in/mm	D	L SW / NPT	Forging				Weight SW / NPT (lb/kg)
			A	B	D	W	
1/2	0.5	5.51	2.24	3.74	4.49	7.87	18
15	12.7	140	57	95	114	200	8
3/4	0.75	5.98	2.48	4.02	4.96	9.84	2
20	19.1	152	63	102	126	250	11
1	1	6.5	2.56	4.37	5.12	9.84	29
25	25.4	165	65	111	130	250	13
1 1/4	1.25	7	3.07	5.12	5.71	13	39
32	31.8	178	78	130	145	330	17.5
1 1/2	1.5	7.48	3.43	5.91	6.3	19.3	46
40	38.1	190	87	150	160	490	21
2	1.94	8.5	3.54	6.69	7.09	24	83
50	49	216	90	170	180	610	37.5

1. Face to Face dimension for pressure rating CL900 SW/NPT ball valve can refer to the dimension specified on table above for CL1500.
2. The face to face and outline dimension for reduce ball valve are the same as full bore ball valve.
3. Long pattern can be applied to the ball valve with structure of metal seat, stem extension, or bare stem, or actuated ball valves, or full welded and butt welded.

FLOATING BALL VALVE

TOP MOUNTING DIMENSIONS AND TORQUE

NPS 1/2-6 (DN 15-150)

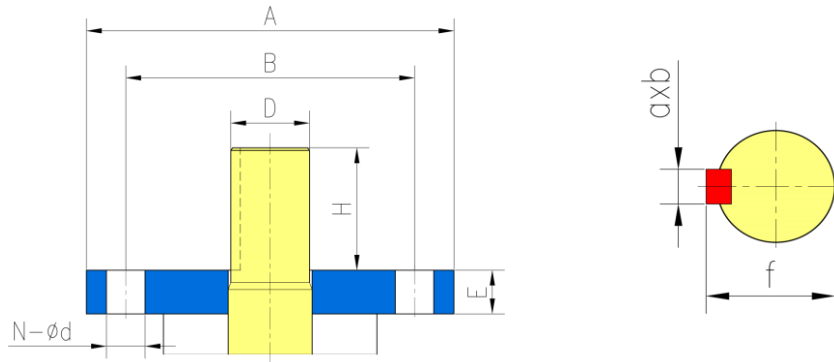


Size in/mm	Rating Class/PN	Torque ⁽¹⁾ ft-lb/N-m	ISO F#	A	B	D	E	n-Φd ⁽²⁾	H	Drive Key a x b	f
1/2 15	150	15	F04	2.13	1.65	0.47	0.2	4-Φ0.24	0.79	0.16x0.16	0.53
	20	20		54	42	12	5	4-Φ6	20	4x4	13.5
	300	18		2.13	1.65	0.47	0.2	4-Φ0.24	0.79	0.16x0.16	0.53
	50	25		54	42	12	5	4-Φ6	20	4x4	13.5
	600	22	F05	2.56	1.97	0.47	0.2	4-Φ0.31	0.79	0.16x0.16	0.53
	100	30		65	50	12	5	4-Φ8	20	4x4	13.5
	800/900	26		2.56	1.97	0.47	0.2	4-Φ0.31	0.79	0.16x0.16	0.53
	136/150	35		65	50	12	5	4-Φ8	20	4x4	13.5
1500	30	F05	2.56	1.97	0.63	0.2	4-Φ0.31	1.18	0.2x0.2	0.71	
250	40		65	50	16	5	4-Φ8	30	5x5	18	
2500	37	F05	2.56	1.97	0.63	0.2	4-Φ0.31	1.18	0.2x0.2	0.71	
420	50		65	50	16	5	4-Φ8	30	5x5	18	
3/4 20	150	22	F04	2.13	1.65	0.55	0.2	4-Φ0.24	1	0.2x0.2	0.63
	20	30		54	42	14	5	4-Φ6	25	5x5	26
	300	26	F04	2.13	1.65	0.55	0.2	4-Φ0.24	1	0.2x0.2	0.63
	50	35		54	42	14	5	4-Φ6	25	5x5	26
	600	30	F05	2.56	1.97	0.63	0.2	4-Φ0.31	1.18	0.2x0.2	0.71
	100	40		65	50	16	5	4-Φ8	30	5x5	18
	800/900	33	F05	2.56	1.97	0.63	0.2	4-Φ0.31	1.18	0.2x0.2	0.71
	136/150	45		65	50	16	5	4-Φ8	30	5x5	18
1500	37	F05	2.56	1.97	0.79	0.2	4-Φ0.31	1.18	0.24x0.24	0.93	
250	50		65	50	20	5	4-Φ8	30	6x6	23.5	
2500	44	F05	2.56	1.97	0.79	0.2	4-Φ0.31	1.18	0.24x0.24	0.93	
420	60		65	50	20	5	4-Φ8	30	6x6	23.5	
1 25	150	30	F05	2.56	1.97	0.63	0.2	4-Φ0.31	1.18	0.2x0.2	0.71
	20	40		65	50	16	5	4-Φ8	30	5x5	18
	300	37	F05	2.56	1.97	0.63	0.2	4-Φ0.31	1.18	0.2x0.2	0.71
	50	50		65	50	16	5	4-Φ8	30	5x5	18
	600	44	F05	2.56	1.97	0.63	0.2	4-Φ0.31	1.18	0.2x0.2	0.71
	100	60		65	50	16	5	4-Φ8	30	5x5	18
	800/900	52	F05	2.56	1.97	0.63	0.2	4-Φ0.31	1.18	0.2x0.2	0.71
	136/150	70		65	50	16	5	4-Φ8	30	5x5	18
1500	59	F07	3.54	2.76	0.79	0.24	4-Φ0.39	1.18	0.24x0.24	0.93	
250	80		90	70	20	6	4-Φ10	30	6x6	23.5	
2500	66	F10	4.02	4.92	0.94	0.24	4-Φ0.47	1.57	0.31x0.28	1.06	
420	90		125	102	24	6	4-Φ12	40	8x7	27	
1-1/4 32	150	37	F05	2.56	1.97	0.79	0.2	4-Φ0.31	1.18	0.24x0.24	0.93
	20	50		65	50	20	5	4-Φ8	30	6x6	23.5
	300	44	F05	2.56	1.97	0.79	0.2	4-Φ0.31	1.18	0.24x0.24	0.93
	50	60		65	50	20	5	4-Φ8	30	6x6	23.5
	600	74	F07	3.54	2.76	0.79	0.24	4-Φ0.39	1.18	0.24x0.24	0.93
	100	100		90	70	20	6	4-Φ10	30	6x6	23.5
	800/900	111	F07	3.54	2.76	0.79	0.24	4-Φ0.39	1.18	0.24x0.24	0.93
	136/150	150		90	70	20	6	4-Φ10	30	6x6	23.5
1500	148	F10	4.02	4.92	0.94	0.24	4-Φ0.47	1.57	0.31x0.28	1.06	
250	200		125	102	24	6	4-Φ12	40	8x7	27	

FLOATING BALL VALVE

TOP MOUNTING DIMENSIONS AND TORQUE

NPS 1/2-6 (DN 15-150)

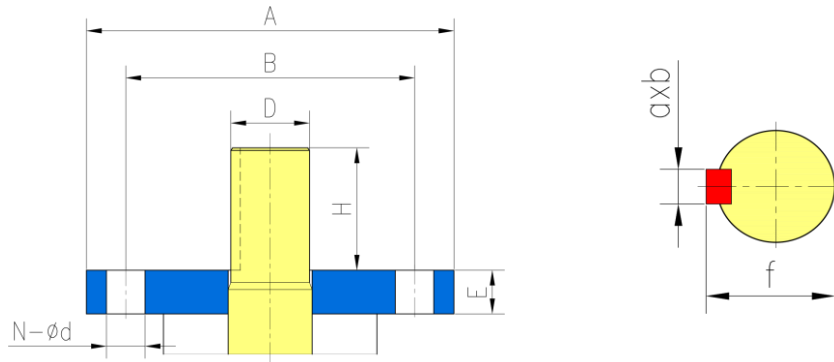

Size in/mm	Rating Class/PN	Torque ⁽¹⁾ ft-lb/N-m	ISO F#	A	B	D	E	n- Φ d ⁽²⁾	H	Drive Key a x b	f	
1-1/2 40	150	37	F05	2.56	1.97	0.79	0.2	4- Φ 0.31	1.18	0.24 x 0.24	0.93	
	20	50		65	50	20	5	4- Φ 8	30	6 x 6	23.5	
	300	44	F05	2.56	1.97	0.79	0.2	4- Φ 0.31	1.18	0.24 x 0.24	0.93	
		50		60	65	50	20	5	4- Φ 8	30	6 x 6	23.5
	600	74	F07	3.54	2.76	0.79	0.24	4- Φ 0.39	1.18	0.24 x 0.24	0.93	
		100		100	90	70	20	6	4- Φ 10	30	6 x 6	23.5
800/900 136/150	111	F07	3.54	2.76	0.79	0.24	4- Φ 0.39	1.18	0.24 x 0.24	0.93		
	150		150	90	70	20	6	4- Φ 10	30	6 x 6	23.5	
2 50	150	44	F10	4.02	4.92	0.94	0.24	4- Φ 0.47	1.57	0.31 x 0.28	1.06	
	20	60		125	102	24	6	4- Φ 12	40	8 x 7	27	
	300	52	F10	4.02	4.92	0.94	0.24	4- Φ 0.47	1.57	0.31 x 0.28	1.06	
		50		70	125	102	24	6	4- Φ 12	40	8 x 7	27
	600	89	F10	4.02	4.92	0.94	0.24	4- Φ 0.47	1.57	0.31 x 0.28	1.06	
		100		120	125	102	24	6	4- Φ 12	40	8 x 7	27
800/900 136/150	148	F10	4.02	4.92	0.94	0.24	4- Φ 0.47	1.57	0.31 x 0.28	1.06		
	200		200	125	102	24	6	4- Φ 12	40	8 x 7	27	
2-1/2 65	150	59	F10	4.02	4.92	0.94	0.24	4- Φ 0.47	1.57	0.31 x 0.28	1.06	
	20	80		125	102	24	6	4- Φ 12	40	8 x 7	27	
	300	96	F10	4.02	4.92	0.94	0.24	4- Φ 0.47	1.57	0.31 x 0.28	1.06	
		50		130	125	102	24	6	4- Φ 12	40	8 x 7	27
	600	148	F10	4.02	4.92	0.94	0.24	4- Φ 0.47	1.57	0.31 x 0.28	1.06	
		100		200	125	102	24	6	4- Φ 12	40	8 x 7	27
3 80	150	111	F10	4.02	4.92	0.94	0.24	4- Φ 0.47	1.57	0.31 x 0.28	1.06	
	20	150		125	102	24	6	4- Φ 12	40	8 x 7	27	
	300	148	F12	5.91	4.92	1.1	0.31	4- Φ 0.55	1.77	0.31 x 0.28	1.22	
		50		200	150	125	28	8	4- Φ 14	45	8 x 7	31
	600	184	F12	5.91	4.92	1.1	0.31	4- Φ 0.55	1.77	0.31 x 0.28	1.22	
		100		250	150	125	28	8	4- Φ 14	45	8 x 7	31
4 100	150	148	F12	5.91	4.92	1.1	0.31	4- Φ 0.55	1.77	0.31 x 0.28	1.22	
	20	200		150	125	28	8	4- Φ 14	45	8 x 7	31	
	300	258	F12	5.91	4.92	1.42	0.31	4- Φ 0.55	2.36	0.39 x 0.31	1.54	
		50		350	150	125	36	8	4- Φ 14	60	10 x 8	39
	6 150	150	332	F12	5.91	4.92	1.42	0.31	4- Φ 0.55	2.36	0.39 x 0.31	1.54
		20	450		150	125	36	8	4- Φ 14	60	10 x 8	39
300		516	F12	5.91	4.92	1.57	0.31	4- Φ 0.55	2.36	0.47 x 0.31	1.69	
		50		700	150	125	40	8	4- Φ 14	60	12 x 8	43


(1) Torque doesn't include safety factor. The torque is based on seats of PTFE/RPTFE (Class 150 – 300), Devlon (Class 900 – 1500), and PEEK (Class 2500). Torque shall be as follows if other than the base seat material is selected:

PTFE/RPTFE	Devlon	PCTFE	TFM	Delrin	PPL	PEEK	Metal
Base	x 1	x 0.8	X 0.8	x 1	X 0.8	x 1.3	x 2.2

(2) Number of bolt holes and bolt hole diameter.

FLOATING BALL VALVE

Seat Material Pressure-Temperature Rating (Operating)

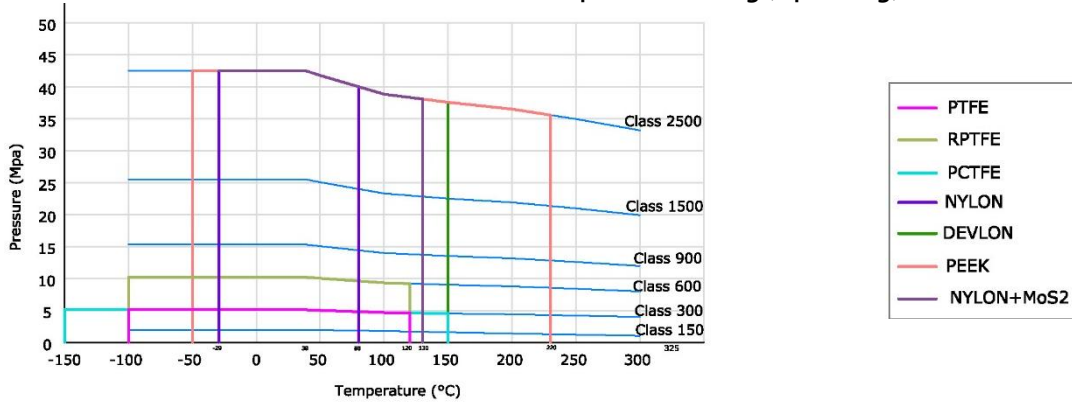

SEAT MATERIALS

Material Name	Description	Operating Temperature	Operating Pressure	Service Application
PTFE	Virgin PTFE is the most widely used sealing material with excellent characteristics suitable for most services. It has excellent chemical resistance throughout valve industries and low coefficient of friction.	-112°F – 248°F -80°C – 120°C	Class 150 PN 20	General chemicals, low pressure services.
RPTFE	RPTFE (Reinforced PTFE) is typically produced by adding 15% fiber glass to virgin PTFE. It has better pressure-temperature properties than virgin PTFE, better resistance to wear and deformation under load. NOT to be used in hydrofluoric acid	-112°F – 248°F -80°C – 120°C	Class 150 – 600 PN 20 – 100	For low and medium pressure services.
PCTFE	PCTFE is a homopolymer of chlorotrifluoroethylene, featuring high compressive strength and low deformation under load.	-320°F – 248°F -196°C – 120°C	Class 150 – 300 PN 20 – 50	For low temperature low pressure services.
Nylon 6	Nylon is a common seat material for Class 600 valves. It is highly resistance to many chemicals and abrasions, and can be used in air, oil and other gas media. It is NOT suitable for strong oxidization agents.	-22°F – 176°F -30°C – 80°C	Class 150 – 1500 PN 20 – 250	For high pressure, low temperature services.
Devlon®	Devlon® is a high molecular weight polyamide that is specifically tailored for high temperature/pressure applications in the offshore oil and gas sector. It is low moisture absorption.	-50°F – 302°F -46°C – 150°C	Class 150 – 1500 PN 20 – 250	For high pressure high temperature offshore services.
Nylon+MoS2	Molon (Nylon+MoS2) is a modified Nylon, the characteristics are similar to Devlon with it is cheaper than Devlon.	-20°F – 266°F -29°C – 130°C	Class 150 – 1500 PN 20 – 250	For high pressure, low temperature services.
PEEK	PEEK is a high performance engineered thermoplastic. It is excellent in water/chemical resistance and it is unaffected by continuous exposure to hot water/steam	-148°F – 500°F -100°C – 260°C	Class 150 – 2500 PN 20 – 420	For high pressure high temperature services.
PPL	PPL (Polyparaphenylene) is an excellent seat material with low coefficient of friction, highly resistant to pressure and temperature.	-50°F – 482°F -46°C – 250°C	Class 150 – 300 PN 20 – 50	For high temperature low pressure services.
Delrin®	Delrin® (Acetal Resin) possesses high tensile strength, creep resistance and toughness. It exhibits low moisture absorption. It is chemically resistant to hydrocarbons, solvents and neutral chemicals. DO NOT use it on oxygen service or steam.	-50°F – 194°F -46°C – 90°C	Class 150 – 600 PN 20 – 100	For extreme pressure services.
TFM	TFM (modified PTFE) is a chemically modified PTFE that offers enhanced properties while retaining all the proven advantages of a conventional PTFE.	-112°F – 320°F -80°C – 160°C	Class 150 PN 20	For services requiring high purity.
Metal	Metal (typically stellite) seats are used in severe conditions where flashing, hydraulic shock, abrasive media or trapped metal may exist in the line.	Varies	Varies	For severe services.

O-RING MATERIALS

Material Name	Description	Operating Temperature	Operating Pressure
NBR	Buna-N (NBR) is an all purpose polymer with good resistance to water, solvents, oil and hydraulic fluids.	-50°F – 176°F -46°C – 80°C	Class 150 – 600 PN 20 – 100
HNBR	HNBR (Hydrogenated NBR) has similar media stability to NBR but with significantly better heat and oxidization stability.	-67°F – 338°F -55°C – 170°C	Class 150 – 2500 PN 20 – 420
Viton	Viton (fluorocarbon) is a fluorocarbon elastomer that is compatible with a broad range of chemicals. It performs well in mineral acids, salt solutions, chlorinated hydrocarbons and petroleum oils	-20°F – 400°F -29°C – 204°C	Class 150 – 2500 PN 20 – 420
EPDM	EPDM has good abrasion and tear resistance with excellent chemical resistance to a variety of acids and alkalines. It is susceptible to attack by oil, strong acids and strong alkalines and should not be used in compressed air lines.	-50°F – 302°F -46°C – 150°C	Class 150 – 1500 PN 20 – 250
FVMQ	Fluorosilicone is a silicone polymer chain with fluorinated side-chains for improved oil and fuel resistance. The mechanical and physical properties are very similar to those of silicone.	-50°F – 350°F -46°C – 177°C	Class 150 – 1500 PN 20 – 250
AFLAS®	AFLAS® is highly resistant to a wide range of chemicals	-49°F – 428°F -29°C – 220°C	Class 150 – 1500 PN 20 – 250

FLOATING BALL VALVE

VALVE FIGURE NUMBER

HOW TO ORDER

Nominal Size	Valve Type	Pressure Rating	End Conn.	Construction	Body Material	Trim Material	Seat or Insert	O-ring	Operation Mode
A	B	C	D	E	F	G	H	I	J
e.g. 0 1	B A	6	R	1	C 1	1 0	R	0	L

NPS 1 Class 600 floating ball valve, RF flanged, 2-piece split body, A105 body, SS316 trim, RPTFE seat insert, No O-ring, Lever operated.

A Nominal Size

00 Special	02 2 (DN 50)	07 8 RB	19 20 RB	31 32 RB
F1 3/8 (DN 10)	R2 2 RB	08 8 (DN 200)	20 20 (DN 500)	32 32 (DN 800)
F2 1/2 (DN 15)	F6 2 1/2 (DN 65)	09 10 RB	21 22 RB	33 34 RB
0R 1/2 RB	3R 2 1/2 RB	10 10 (DN 250)	22 22 (DN 550)	34 34 (DN 850)
F3 3/4 (DN 20)	03 3 (DN 80)	11 12 RB	23 24 RB	35 36 RB
Ro 3/4 RB	R3 3 RB	12 12 (DN 300)	24 24 (DN 600)	36 36 (DN 900)
01 1 (DN 25)	04 4 (DN 100)	13 14 RB	25 26 RB	37 38 RB
R1 1 RB	R4 4 RB	14 14 (DN 350)	26 26 (DN 650)	38 38 (DN 950)
F4 1 1/4 (DN 32)	05 5 (DN 125)	15 16 RB	27 28 RB	39 40 RB
1R 1 1/4 RB	R5 5 RB	16 16 (DN 400)	28 28 (DN 700)	40 40 (DN 1000)
F5 1 1/2 (DN 40)	06 6 (DN 150)	17 18 RB	29 30 RB	41 42 RB
2R 1 1/2 RB	R6 6 RB	18 18 (DN 450)	30 30 (DN 750)	... More as such

B Valve Type

BA Ball Valve

C Pressure Rating

0 Special
1 Class 150
3 Class 300
5 Class 1500
6 Class 600

D End Connection

7 Class 2500
9 Class 900
8 Class 800
2 Class 125
4 Class 400
X Special
R RF Flanged
J RTJ Flanged
F FF Flanged
T Threaded
B Butt-Weld (BW)
S Socket-Weld (SW)
W Wafer
L Lug

E Construction

0 Special
1 2PC Body Floating
2 3PC Body Floating
5 Welded Body Floating

F Body Material

X0 Special
C1 A105
C2 A216 WCA
C4 A216 WCB
C6 A216 WCC
M1 A182 F1
M2 A217 WC1
M3 A182 F2
M4 A217 WC4
M5 A182 F12 CL 2
M6 A217 WC5
M7 A182 F11 CL 2
M8 A217 WC6
M9 A182 F22 CL 3
M0 A217 WC9
E1 A182 F5
E2 A217 C5
E4 A217 C6
E5 A182 F9
E6 A217 C12
E7 A182 F91
E8 A217 C12A
L1 A350 LF1
L2 A352 LCA
L3 A350 LF2
L4 A352 LC2
L5 A350 LF3
L6 A352 LC3
L7 A350 LF5
L8 A352 LCB
L9 A350 LF6
LA A350 LF9
LB A352 LC9
LD A352 LCC
S1 A182 F304
S2 A351 CF8
S3 A182 F304L
S4 A351 CF3
S5 A182 F316
S6 A351 CF8M
S7 A182 F316L
S8 A351 CF3M
S9 A182 F347
S0 A351 C F8C
D1 A182 F51
D2 A995 4A
D3 A182 F53
D4 A995 5A
D5 A182 F55
D6 A995 6A

G Trim Material

00 Special
01 F6a/F6a/410
02 304/304/304
09 Monel/Monel/Monel
10 316/316/316
13 Alloy 20/Alloy 20/Alloy 20
19 A105+ENP/A105+ENP/F6a
20 304L/304L/304L
21 316L/316L/316L
22 F321/F321/F321
23 F55/F55/F55
24 F51/F51/F51
25 F53/F53/F53
26 A105+ENP/A105+ENP/F316
27 304+ENP/304+ENP/304+ENP
28 Inconel 625/Inconel 625/F316
29 A105+ENP/A105+ENP/4140+ENP
30 A105+ENP/A105+ENP/A105+ENP
31 316/316/17-4PH
36 LF2+ENP/LF2+ENP/F6a
37 A105+TCC/A105+TCC/17-4PH
38 A105+TCC/A105+TCC/4140+ENP
39 A105+TCC/A105+TCC/F51
40 A105+ENP/A105+ENP/17-4PH
41 A105+Ni60/A105+Ni55/4140+ENP
42 A105+Ni60/A105+Ni60/17-4PH
44 Inconel 625/Inconel 625/Inconel 625
45 316+ENP/316+ENP/F316
46 316+ENP/316+ENP/F316+ENP
47 316+Ni60/316+Ni55/17-4PH
48 316L+Ni60/316L+Ni55/17-4PH
49 316+Ni60/316+Ni55/4140+ENP
50 316L+Ni60/316L+Ni55/4140+ENP

FLOATING BALL VALVE

VALVE FIGURE NUMBER (CONT'D)

HOW TO ORDER

Nominal Size	Valve Type	Pressure Rating	End Conn.	Construction	Body Material	Trim Material	Seat or Insert	O-ring	Operation Mode
A	B	C	D	E	F	G	H	I	J
e.g. 0 1	B A	6	R	1	C 1	1 0	R	o	L

NPS 1 Class 600 floating ball valve, RF flanged, 2-piece split body, A105 body, SS316 trim, RPTFE seat insert, No O-ring, Lever operated.

H	Seat or Seat Insert	I	O-Ring	J	Operation
X	Special	M	Metal	o	None
T	PTFE	O	Molon	1	Viton
R	RPTFE	E	EPDM	2	Teflon
N	Nylon	L	PPL	3	HNBR
V	Viton	A	Delrin	4	NBR
Q	TFM			5	Special
D	Devlon			6	EPDM
P	PEEK			7	FVMQ
C	PCTFE			8	FFKM
H	HNBR			9	AFLAS
				B	Bare Stem
				L	Lever
				G	Gearbox
				P	Pneumatic
				E	Electric
				C	Gear w/ Chain
				N	Pneumatic-Hydraulic
				S	Solid Lever
				D	Lever with locking device
				R	Solid lever with locking device

HOW THE FIGURE NUMBER SYSTEM WORKS

Introduction. Figure number system uses a code consisting 14 digits of letters and numbers to represent the specification of a valve of certain specification. Among 14 digits, they are separated into 10 groups identified by letters from A to J. Each group represents a parameter of a valve, together they contain almost all the essential parameters of the valve.

Uses. Using the figure number system to generate a code is easy. Under each group, the code is shown on the left while on the right is the meaning of the code. Start by selecting a code from group A, through group J. If the specification of the valve is not listed, select the code for "Special ". The total length of the figure number shall be exactly 14 digits.

Cautions. It is advised that you have as detailed the specification as possible to generate a figure number, which means eliminating "Specials". If you don't have enough specification or information about the valve you are ordering, or you're not sure how to use the system to generate a figure number, contact one of our sales representatives for help.

Note: FBV reserves the right to make any modifications without notice.





Offshore



Pipeline



Onshore



Refinery



IMPORTANT NOTICE

- All dimensions in inches not listed in standards are converted from millimeters. Weights in lbs (pounds) are converted from kilograms.
- Data listed in the catalog, including dimensions, weights, specifications and other valve related data are intended to provide general information and guidance only.
- FBV Inc. assumes no responsibility for errors or inadequacy relevant to any information provided in this catalog. Any information provided in this catalog is subject to change without notice.



2121 Brittmoore Rd Suite 4000
Houston, TX 77043 USA

T 832-203-5459
F 832-203-5461

E sales@fbvalve.com

www.fbvalve.com

©FBV Inc. All rights reserved.