


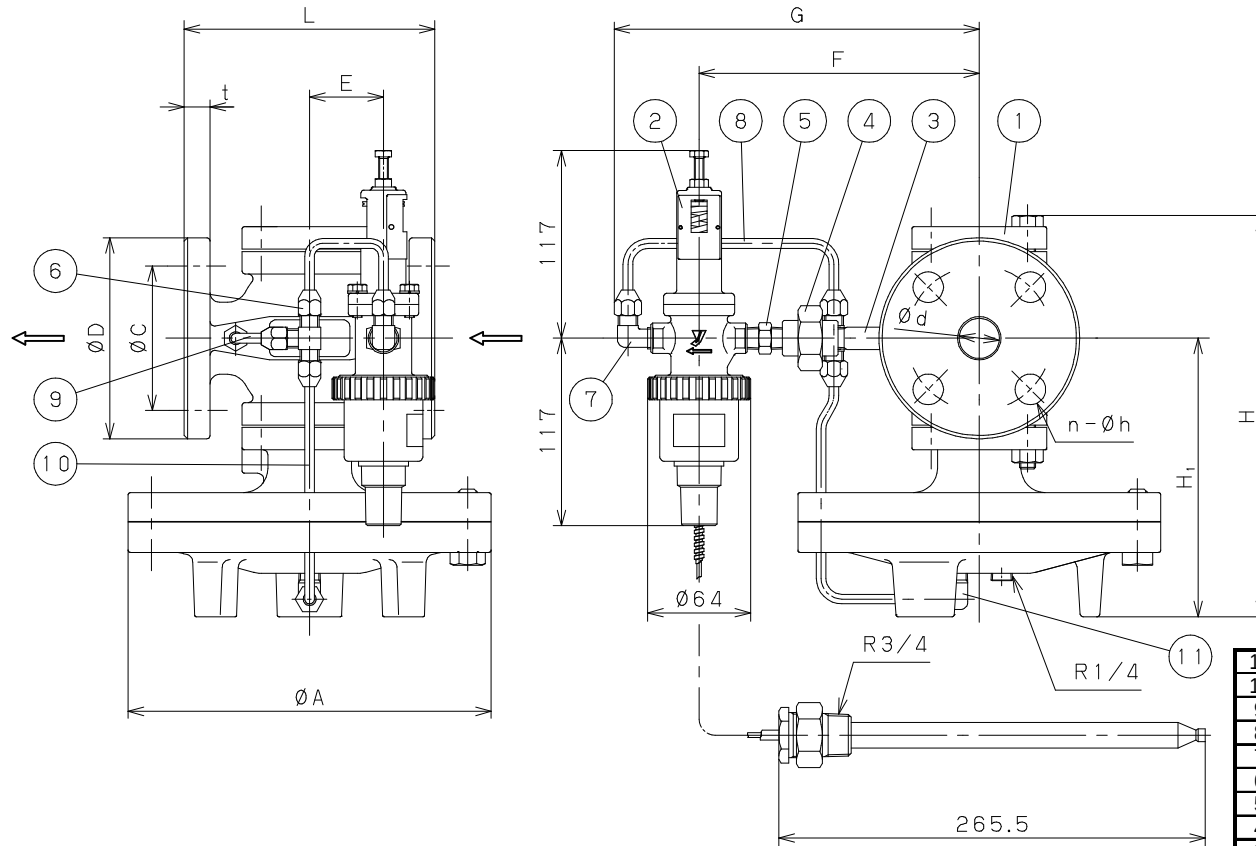

11	Elbow	Brass	エルボ	C3771	1
10	Pipe	Copper	導管	C1220	1
9	Pipe	Copper	導管	C1220	1
8	Pipe	Copper	導管	C1220	1
7	Elbow	Brass	エルボ	C3771	1
6	Tee	Brass	ティ	C3771	1
5	Nipple	Carbon Steel	ニップル	S25C	1
4	Union	Carbon Steel	ユニオン	S25C	1
3	Long Nipple	Carbon Steel	ロングニップル	STPG370	1
2	Pilot Valve OB-2000P	Bronze	子弁 OB-2000P	CAC406	1
1	Main Valve GPM-2000	Ductile Cast Iron	親弁 GPM-2000	FCD450	1
No.	Name of Parts	Material	部品名	材質	Q.TY


Size	L	H ₁	H	A	E	F	G	Flange JIS 10K FF					Weight (kg)
								d	D	C	t	n-h	
15A	142	170	244	200	45	169	222	15	95	70	12	4-15	15.4
20A	142	170	244	200	45	169	222	20	100	75	14	4-15	15.9
25A	152	175	251	226	46	174	227	25	125	90	14	4-19	20.7
32A	172	192	282	226	55	182	235	32	135	100	16	4-19	23.7
40A	192	192	282	226	55	182	235	40	140	105	16	4-19	24.2
50A	218	216	319	276	60	189	242	50	155	120	16	4-19	35.5
65A	278	251	373	352	75	206	259	65	175	140	18	4-19	63.0
80A	294	265	399	352	80	217	270	80	185	150	18	8-19	68.1
100A	330	321	488	401	105	234	287	100	210	175	18	8-19	106.4

Specification	
Fluid	
Press.	MPa
Temp.	
Set Temp.	
Temp.Regulation Range	
Capillary Tube Length	mm

TYPE OB-2000 TEMPERATURE REGULATOR 温度調整弁

Approval	M. Kume
Check	H. Tange
Drawing	H. Iwamoto
Drawing No.	Y-773-2205
Date	25 FEB. 2000

Yoshitake
INC.

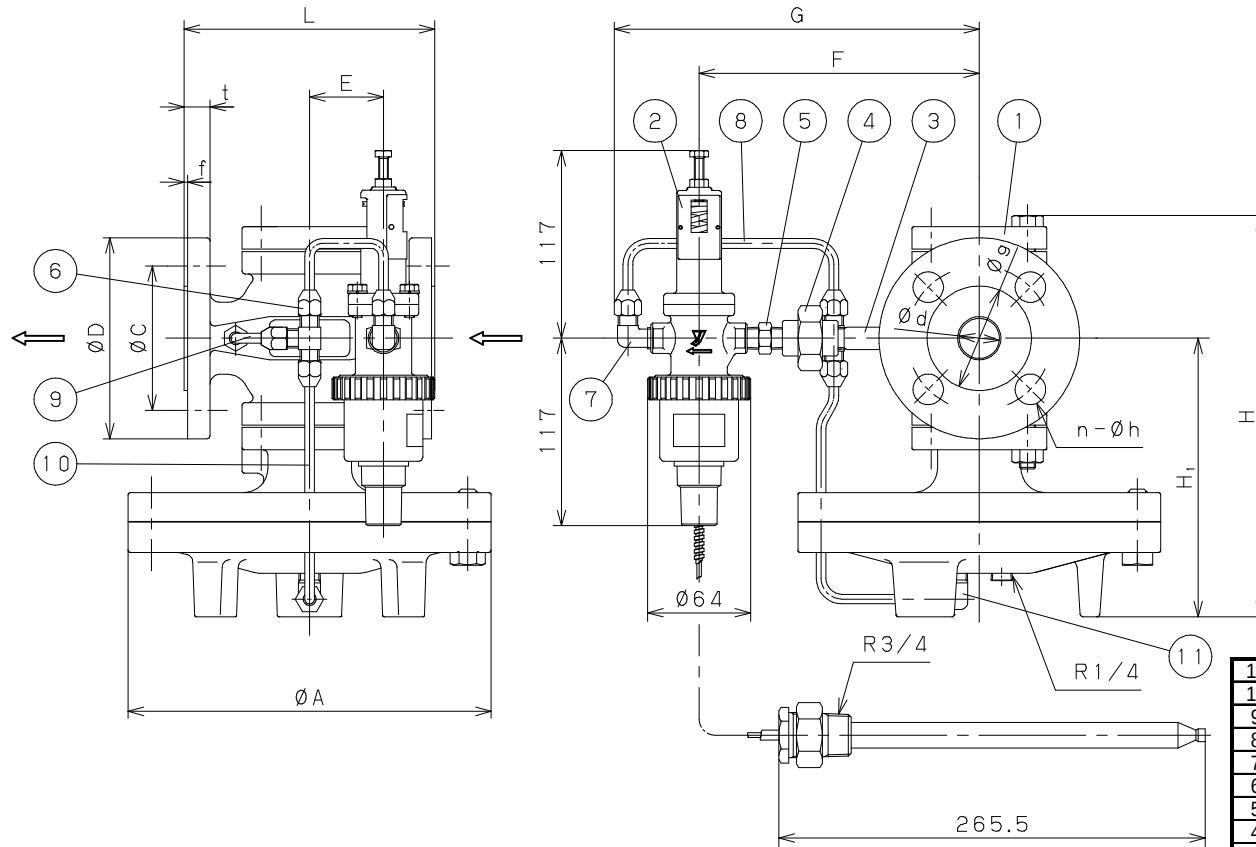

No.	Name of Parts	Material	部品名	材質	Q.TY
11	Elbow	Brass	エルボ	C3771	1
10	Pipe	Copper	導管	C1220	1
9	Pipe	Copper	導管	C1220	1
8	Pipe	Copper	導管	C1220	1
7	Elbow	Brass	エルボ	C3771	1
6	Tee	Brass	ティ-	C3771	1
5	Nipple	Carbon Steel	ニップル	S25C	1
4	Union	Carbon Steel	ユニオン	S25C	1
3	Long Nipple	Carbon Steel	ロングニップル	STPG370	1
2	Pilot Valve OB-2000P	Bronze	子弁 OB-2000P	CAC406	1
1	Main Valve GPM-2000	Ductile Cast Iron	親弁 GPM-2000	FCD450	1


Size	L	H _t	H	A	E	F	G	Flange JIS 20K RF							Weight (kg)
								d	D	C	g	t	f	n-h	
15A	146	170	244	200	45	169	222	15	95	70	51	14	1	4-15	15.6
20A	146	170	244	200	45	169	222	20	100	75	56	16	1	4-15	16.1
25A	156	175	251	226	46	174	227	25	125	90	67	16	1	4-19	21.1
32A	176	192	282	226	55	182	235	32	135	100	76	18	2	4-19	24.1
40A	196	192	282	226	55	182	235	40	140	105	81	18	2	4-19	24.6
50A	222	216	319	276	60	189	242	50	155	120	96	18	2	8-19	35.7
65A	282	251	373	352	75	206	259	65	175	140	116	20	2	8-19	63.3
80A	302	264	399	352	80	217	270	80	200	160	132	22	2	8-19	70.3
100A	342	321	488	401	105	234	287	100	225	185	160	24	2	8-23	110.0

Specification	
Fluid	
Press.	MPa
Temp.	
Set Temp.	
Temp.Regulation Range	
Capillary Tube Length	mm

TYPE OB-2000 TEMPERATURE REGULATOR 温度調整弁

Approval	M. Kume
Check	H. Tange
Drawing	H. Iwamoto
Drawing No.	Y-773-2210
Date	26 FEB. 2000



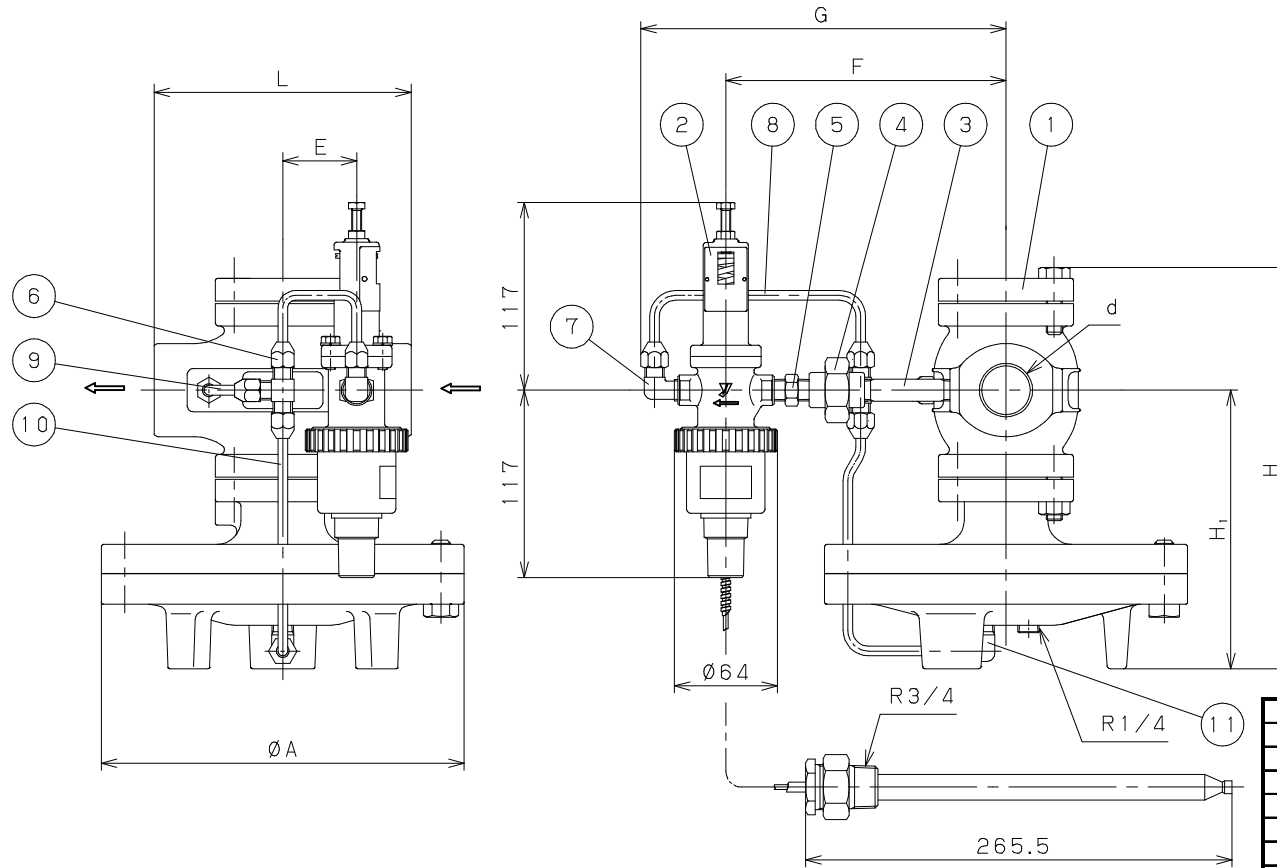

11	Elbow	Brass	エルボ	C3771	1
10	Pipe	Copper	導管	C1220	1
9	Pipe	Copper	導管	C1220	1
8	Pipe	Copper	導管	C1220	1
7	Elbow	Brass	エルボ	C3771	1
6	Tee	Brass	ティ-	C3771	1
5	Nipple	Carbon Steel	ニッブル	S25C	1
4	Union	Carbon Steel	ユニオン	S25C	1
3	Long Nipple	Carbon Steel	ロングニッブル	STPG370	1
2	Pilot Valve OB-2000P	Bronze	子弁 OB-2000P	CAC406	1
1	Main Valve GPM-2000	Ductile Cast Iron	親弁 GPM-2000	FCD450	1
No.	Name of Parts	Material	部 品 名	材 質	Q.TY

Size	d	L	H ₁	H	A	E	F	G	Weight (kg)
15A	Rc 1/2	150	170	244	200	45	169	222	14.1
20A	Rc 3/4	150	170	244	200	45	169	222	14.1
25A	Rc 1	160	175	251	226	46	174	227	18.1
32A	Rc 1 1/4	180	192	282	226	55	182	235	21.6
40A	Rc 1 1/2	180	192	282	226	55	182	235	21.6
50A	Rc 2	230	216	319	276	60	189	242	32.7

Specification	
Fluid	
Press.	MPa
Temp.	
Set Temp.	
Temp.Regulation Range	
Capillary Tube Length	mm

TYPE OB-2000 TEMPERATURE REGULATOR 温度調整弁

Approval	M. Kume
Check	H. Tange
Drawing	H. Iwamoto
Drawing No.	Y-773-2201
Date	24 FEB. 2000

