#### 41 Series

#### **Specifications**

Fluids: Compressed air, vacuum, inert gases

Pressure Range: Vacuum to 120 psi

**Lubrication:** Not required, if used select a medium aniline lubricant

(between 180° and 210°)

**Filtration** 40 micron


Flow Up to .035 Cv

Coil Class A (#26 AWG x 18), continuous duty.

**Voltage Range:** -15% to +10% of nominal voltage.


**Power** 4.0w, 3.0w, 2.5w, 1.8w

## **How to Order 41 Series**

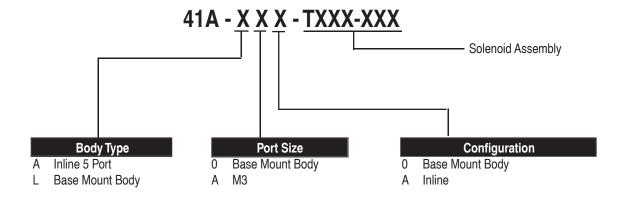


### **How to Order 31/41 Series**

**Solenoid Assembly** 

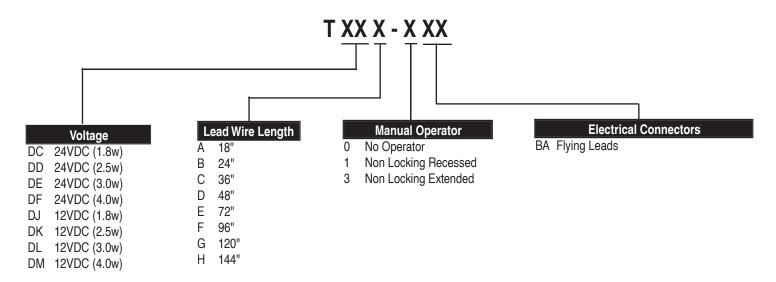


# How to Order 41 Series EBM Circuit Bar

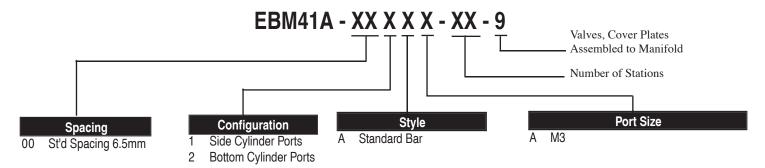


Note: Through ports (Inlet and Exhaust) are M7 Ports.

# How to Order 31 Series EBM Circuit Bar

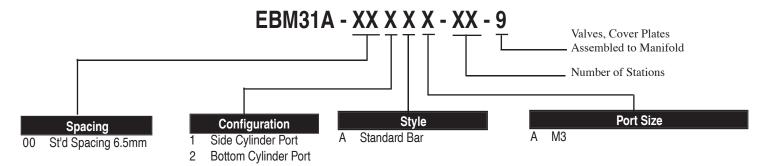



Note: Through ports (Inlet and Exhaust) are M7 Ports.

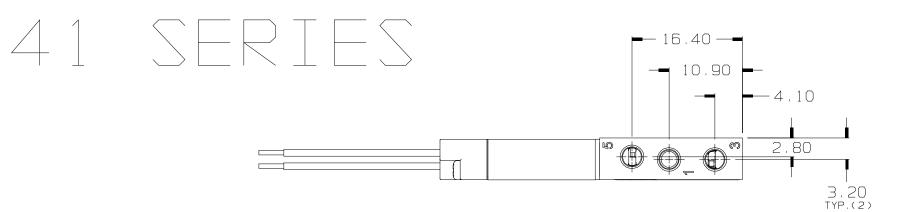


·

0

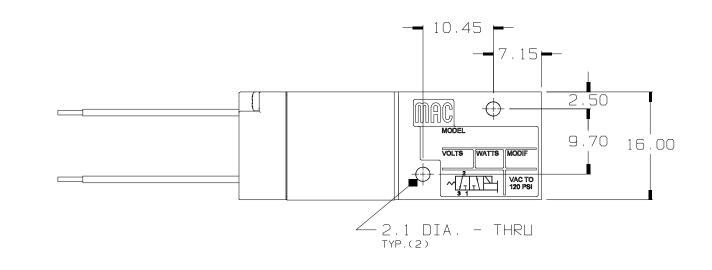

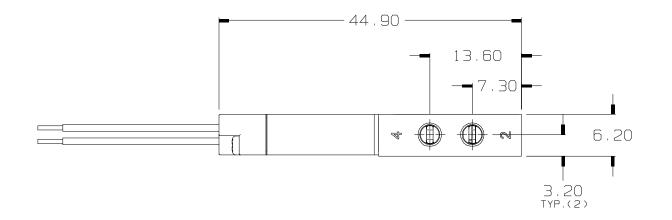

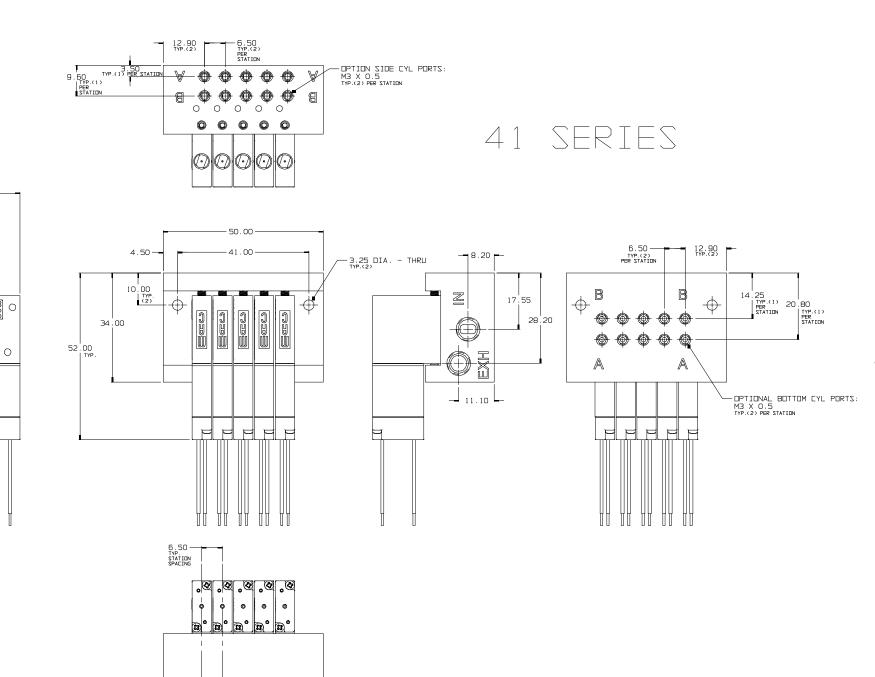

- 38,00 -

— 16.75 —

8.20 🛌

J 11.10 L

17.55

28.20

M7 X 1.0 TYP.(4) (2) EACH END

### 31 SERIES EBM

(SHOWN WITH "FLYING LEADS" CONNECTOR)

