





1500-1570 Gate Valves

Forged Steel OS&Y – Conventional Port
Valves comply with applicable portions of API 602 and ASME B16.34

Class 1500
1/4" - 2"

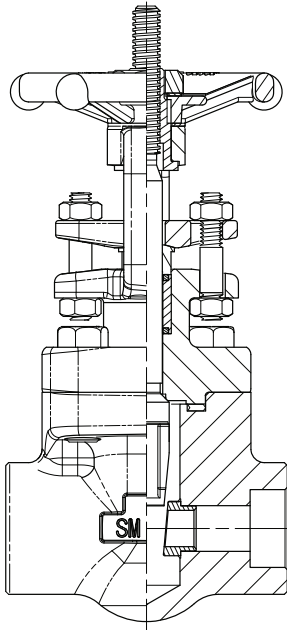

1500

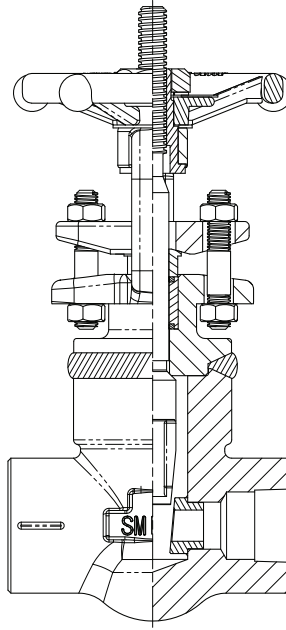

1570

CLASS 1500 CONVENTIONAL PORT BOLTED BONNET GATE VALVE - THREADED or SOCKET WELD - INCHES (MM)								
VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	SOCKET DEPTH	SOCKET DIAMETER	NPT THRD	APPROX. WEIGHT LBS (KG)
1/4 (8)	3.50 (89)	6.50 (165)	4.00 (102)	0.31 (8)	0.39 (10)	0.56 (14)	1/4"-18	5.3 (2.4)
3/8 (10)	3.50 (89)	6.50 (165)	4.00 (102)	0.39 (10)	0.39 (10)	0.69 (18)	3/8"-18	5.3 (2.4)
1/2 (15)	3.50 (89)	6.50 (165)	4.00 (102)	0.39 (10)	0.39 (10)	0.86 (22)	1/2"-14	5.0 (2.3)
3/4 (20)	3.88 (98)	7.25 (184)	4.00 (102)	0.50 (13)	0.51 (13)	1.07 (27)	3/4"-14	7.3 (3.3)
1 (25)	4.75 (121)	8.94 (227)	5.50 (140)	0.75 (19)	0.51 (13)	1.34 (34)	1"-11 1/2	14.0 (6.4)
1 1/4 (32)	5.50 (140)	11.00 (279)	6.63 (168)	1.19 (30)	0.51 (13)	1.68 (43)	1 1/4"-11 1/2	23.0 (10.4)
1 1/2 (40)	5.50 (140)	11.00 (279)	6.63 (168)	1.19 (30)	0.51 (13)	1.92 (49)	1 1/2"-11 1/2	22.5 (10.2)
2 (50)	6.25 (159)	11.56 (294)	6.63 (168)	1.50 (38)	0.63 (16)	2.41 (61)	2"-11 1/2	29.5 (13.4)

CLASS 1500 CONVENTIONAL PORT WELDED BONNET GATE VALVE - THREADED or SOCKET WELD - INCHES (MM)								
VALVE SIZE NPS (DIN)	END TO END	CENTER TO TOP (OPEN)	HANDWHEEL DIAMETER	PORT DIAMETER	SOCKET DEPTH	SOCKET DIAMETER	NPT THRD	APPROX. WEIGHT LBS (KG)
1/4 (8)	3.50 (89)	6.31 (160)	4.00 (102)	0.31 (8)	0.39 (10)	0.56 (14)	1/4"-18	4.8 (2.2)
3/8 (10)	3.50 (89)	6.38 (162)	4.00 (102)	0.39 (10)	0.39 (10)	0.69 (18)	3/8"-18	4.8 (2.2)
1/2 (15)	3.50 (89)	6.38 (162)	4.00 (102)	0.39 (10)	0.39 (10)	0.86 (22)	1/2"-14	4.5 (2.0)
3/4 (20)	3.88 (98)	7.00 (178)	4.00 (102)	0.50 (13)	0.51 (13)	1.07 (27)	3/4"-14	6.0 (2.7)
1 (25)	4.75 (121)	8.75 (222)	5.50 (140)	0.75 (19)	0.51 (13)	1.34 (34)	1"-11 1/2	11.3 (5.1)
1 1/4 (32)	5.50 (140)	10.69 (272)	6.63 (168)	1.19 (30)	0.51 (13)	1.68 (43)	1 1/4"-11 1/2	17.8 (8.1)
1 1/2 (40)	5.50 (140)	10.69 (272)	6.63 (168)	1.19 (30)	0.51 (13)	1.92 (49)	1 1/2"-11 1/2	17.5 (7.9)
2 (50)	6.25 (159)	11.06 (281)	6.63 (168)	1.50 (38)	0.63 (16)	2.41 (61)	2"-11 1/2	24.2 (11.0)