


WALWORTH CAST IRON RISING STEM GLOBE VALVES CLASS 125

DESIGN FEATURES

- Design in accordance with MSS SP-85
- CLASS 125
- Rising Stem
- Cast Iron Construction
- Bolted Body design
- Handwheel Operated
- Face to Face dimensions as per ANSI B16.10
- Flanged drilled conforms to ANSI B16.1

Catalog Figure No.	Type of Ends
W906F	Flat Face ends

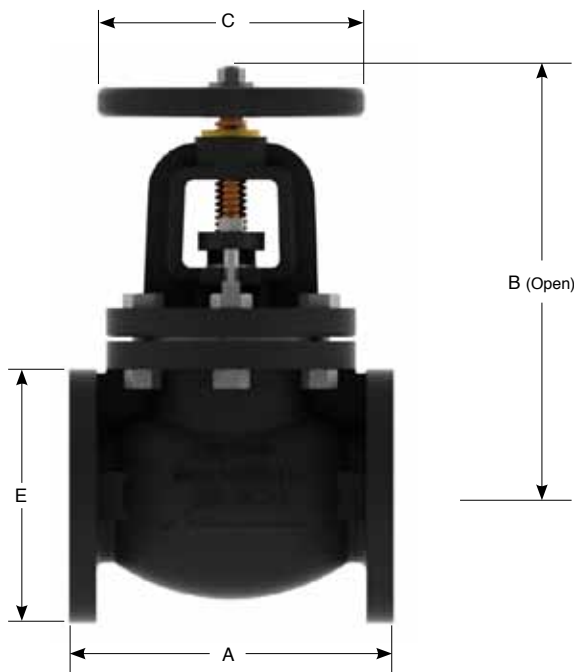

Dimensions and Weights

D Nominal Diameter	mm	51	64	76	102	127	152	203	254	305
	in	2	2 1/2	3	4	5	6	8	10	12
A	mm	203.0	216.0	241.0	292.0	330.0	356.0	495.0	622.0	698.0
	inch	7.99	8.50	9.49	11.50	12.99	14.02	19.49	24.49	27.48
B (Open)	mm	254	292	330	353	387	470	540	565	673
	inch	10.00	11.50	13.00	13.88	15.25	18.50	21.25	22.25	26.50
C	mm	178	178	200	254	300	300	348	400	457
	inch	7.01	7.01	7.87	10.00	11.81	11.81	13.70	15.75	17.99
E	mm	203.0	216.0	214.0	292.0	330.0	356.0	495.0	622.0	698.5
	inch	7.99	8.50	8.43	11.50	12.99	14.02	19.49	24.49	27.50
Weight	kg	28	34	46	76	101	132	201	317	433
W906F	lb	61.74	74.97	101.43	167.59	222.71	291.07	443.22	699.01	954.80
Cv	Flow	47.0	76.0	109.0	199.0	320.0	477.0	877.0	1370.0	2048.0
	Coefficient									