


■ High pressure swing check valves ■ DRI 16-63 ■ 640 AB ■ PD 16-63 ■ DN 50-600

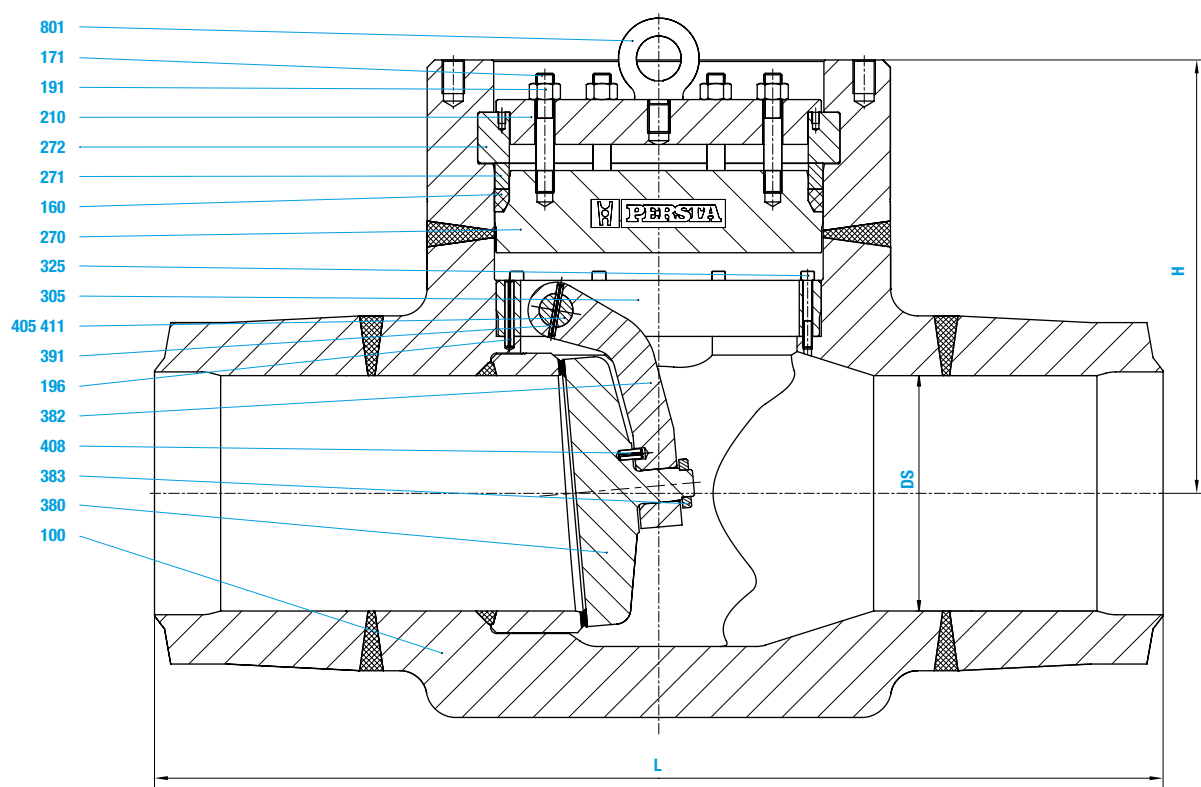

■ High pressure swing check valves ■ DRI 16-63 ■ 640 AB ■ PD 16-63 ■ DN 50-600

Materials								
Pos.	Component	1.0460 (21)	1.5415 (42)	1.7335 (44)	1.7383 (45)	1.6368 (46)	1.4903 (63)	1.4901 (66)
100	Body	1.0460	1.5415	1.7335	1.7383	1.6368	1.4903	1.4901
160	▶ Gasket	Graphite	Graphite	Graphite	Graphite	Graphite	Graphite	Graphite
171	Stud	1.7709	1.7709	1.7709	1.7709	1.7709	1.7709	1.4923
191	Hexagonal nut	1.7218	1.7218	1.7218	1.7218	1.7218	1.7218	1.4923
196	▶ Tension pin	1.4310	1.4310	1.4310	1.4310	1.4310	1.4310	1.4310
210	Bonnet	1.7383	1.7383	1.7383	1.7383	1.7383	1.7383	1.4903
270	Cover	1.0460	1.5415	1.7335	1.7383	1.6368	1.4903	1.4901
271	Ring	1.0460	1.5415	1.7335	1.7383	1.6368	1.4903	1.4901
272	Segmentring	1.0460	1.5415	1.7335	1.7383	1.6368	1.4903	1.4901
305	▶ Supportring	1.0460	1.5415	1.7335	1.7383	1.7383	1.4903	1.4901
325	Headcap screw	A4	A4	A4	A4	A4	A4	A4
380	▶ Disc	1.0460	1.5415	1.7335	1.7383	1.6368	1.4903	1.4901
	welded on with	Stellite	Stellite	Stellite	Stellite	Stellite	Stellite	Stellite
382	▶ Hinge	1.0460	1.5415	1.7335	1.7383	1.7383	1.4903	1.4903
383	▶ Washer	1.0460	1.0460	1.7335	1.7383	1.6368	1.4923	1.4923
391	▶ Tension pin	1.4310	1.4310	1.4310	1.4310	1.4310	1.4310	1.4310
405	▶ Hinge pin	1.4923	1.4923	1.4923	1.4923	1.4923	1.4923	1.4923
408	▶ Tension pin	1.4310	1.4310	1.4310	1.4310	1.4310	1.4310	1.4310
411	▶ Guide bushing	5.3106	5.3106	5.3106	5.3106	5.3106	5.3106	5.3106
801	Lifting eye bolt	1.0401	1.0401	1.0401	1.0401	1.0401	1.0401	1.0401
▶ Spare parts								

Dimensions/mm and Weights/kg																			
DN	DS	DRI 16			DRI 25			DRI 32			DRI 40			DRI 63					
		L	H	kg	L	H	kg	L	H	kg	L	H	kg	L	H	kg			
65-200		Version DRI 26.25			Version DRI 26.25			Version DRI 26.40			Version DRI 26.40			On request					
225	202,5							1050	450	910	On request								
250 / 225	202,5							1150	450										
250	225,0							1150	515	1300									
300 / 250	225,0	Version DRI 26.25			Version DRI 26.25			1350	515		On request			On request					
300	270,0							1350	605	2300									
350 / 300	270,0							1550	605										
350	315,0							1200	540	2300							1550	785	4000
400 / 350	315,0	1200	540		1750	580		1750	785		On request			On request					
400	360,0	1350	600	3600	1750	660	3600												
450 / 400	360,0	1350	600		1950	660													
450	405,0	1500	690	5400	1950	750	5400												
500 / 450	405,0	1500	692		2150	750													
500	450,0	1650			On request			On request									On request		
600 / 500	540,0	1650																	
600	540,0	On request																	