


WALWORTH STANDARD FLOATING BALL VALVES

CLASS 1000 WOG

Design Features

- Design in accordance with MSS SP110
- CLASS 1000 WOG
- Full Port
- Three-pieces body
- Investment Cast Steel Construction
- Bolted Body
- Threaded ends as per ASME B1.20.1
- Socket weld ends as per ASME B16.11
- End to end dimensions as per WALWORTH standard

Lever Operator	
Catalog Figure No.	Type of Ends
7011	Threaded (S)
7017	Socket Weld (SW)

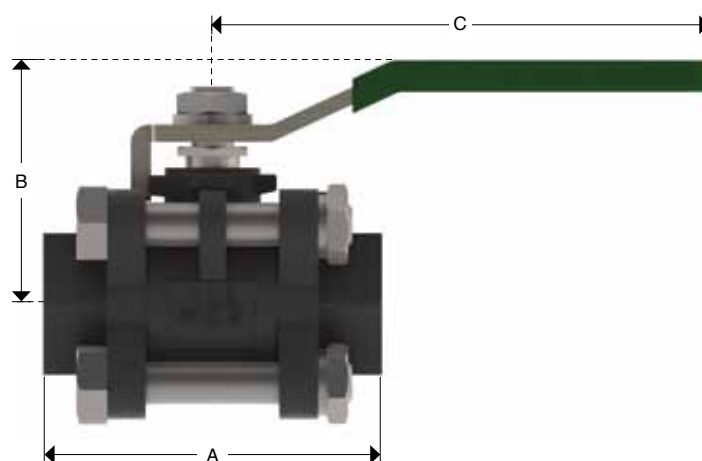

Dimensions and Weights

D Nominal Diameter	mm	6	10	15	20	25	32	40	50	65	80	100
	in	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
A	mm	50.4	50.4	61.4	70.2	79.6	93	102	124.2	156.2	179.2	218.4
	in	2	2	2 3/7	2 3/4	3 1/7	3 2/3	4	4 8/9	6 1/7	7	8 3/5
B	mm	42.5	42.5	49.6	58.1	61	78.3	82.5	90.9	114.5	124	176
	in	1 2/3	1 2/3	2	2 2/7	2 2/5	3	3 1/4	3 4/7	4 1/2	4 7/8	7
C	mm	101.5	101.5	101.5	124	124	152	152	190	242	242	327
	in	4	4	4	4 7/8	4 7/8	6	6	7 1/2	9 1/2	9 1/2	12 7/8
Weight 7011	kg	0.41	0.41	0.46	0.87	1.09	1.93	2.6	3.75	9.1	13.23	20.63
	lb	0.90	0.90	1.01	1.92	2.40	4.26	5.73	8.27	20.07	29.17	45.49