


WALWORTH STANDARD FLOATING BALL VALVES CLASS 2000 WOG

Design Features

- Design in accordance with MSS SP110
- CLASS 2000 WOG
- Full Port
- Three-pieces body
- Investment Cast Steel Construction
- Bolted Body
- Threaded ends as per ASME B1.20.1
- Socket weld ends as per ASME B16.11
- End to end dimensions as per WALWORTH standard

Lever Operator	
Catalog Figure No.	Type of Ends
7411	Threaded (S)
7417	Socket Weld (SW)

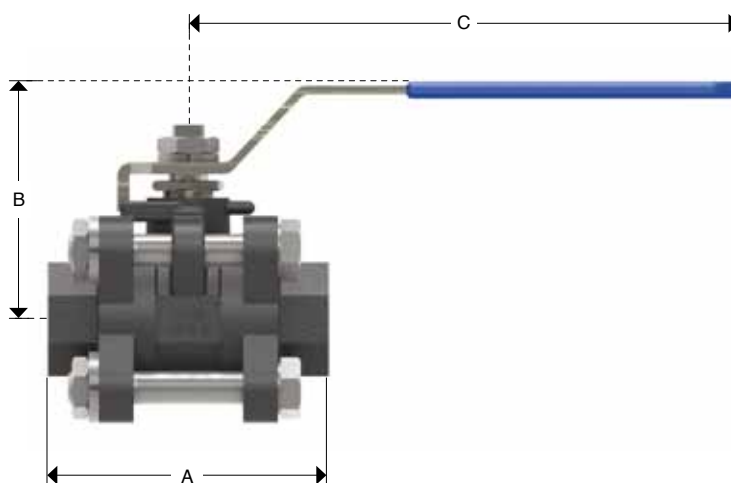

Dimensions and Weights

D Nominal Diameter	mm	6	10	15	20	25	32	40	50
	in	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
A	mm	63	63	66	83	95	106.6	130	150.6
	in	2 1/2	2 1/2	2 3/5	3 1/4	3 3/4	4 1/5	5 1/8	6
B	mm	54	54	59	63	76	85	91	100
	in	2 1/8	2 1/8	2 1/3	2 1/2	3	3 1/3	3 4/7	4
C	mm	104	104	125	125	155	155	200	200
	in	4	4	5	5	6 1/9	6 1/9	7 7/8	7 7/8
Weight 7411	kg	0.47	0.45	0.64	0.89	1.27	1.99	2.91	4.39
	lb	1.04	0.99	1.41	1.96	2.80	4.39	6.42	9.68