


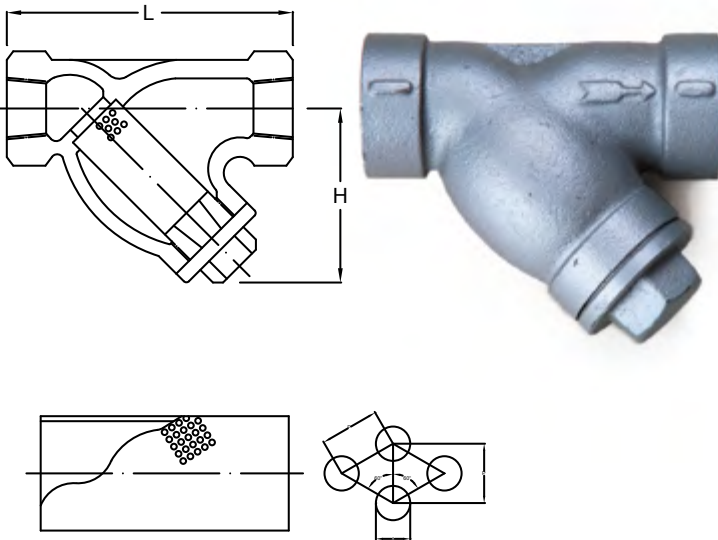


- Please name the model No. (YS-R3S) when negotiation.
- Thread: BS21, ANSI B2.1 or DIN-259.
- Test Pressure: Body 20 kgf/cm² (Hydrostatic)

Screen Hole Size				mm
Size	A	P	T	
1/2" - 1"	1	2	0.6	120 mesh
1.1/4" - 3"	2	3.5	0.6	60 mesh

Dimension		mm							
Size	inch	1/2	3/4	1	1.1/4	1.1/2	2	2.1/2	3
	mm	15	20	25	32	40	50	65	80
L		93	110	123	155	160	190	205	245
H		60	70	85	100	105	125	145	165

Material	
Model	YS-R3S
Body	IRON
Cap	IRON
Screen	S.S. 304
Gasket	ASBESTOS
Plug	SS 41

CAST IRON Y-STRAINER CLASS 10K AND 150LBS

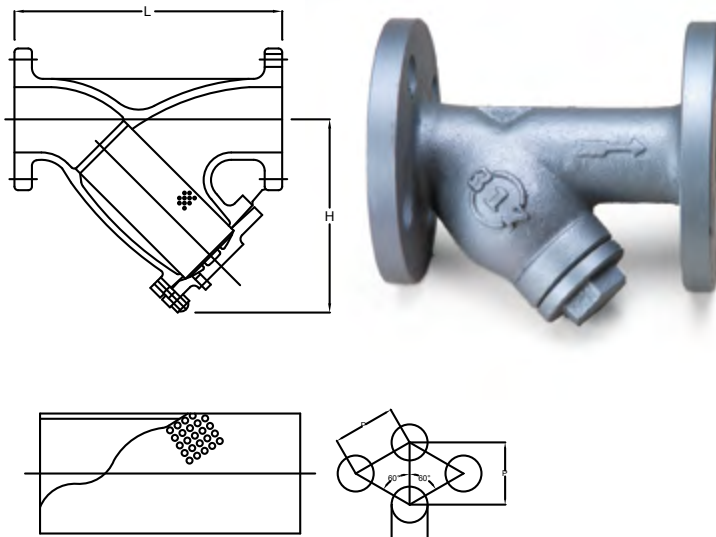

- Please name the model No. (YS-R3F) when negotiation.
- End Flange Dimensions: Acc. To JIS 10K, ANSI 150 LBS or BS Table Standard.
- Test Pressure: Body 20 kgf/cm² (Hydrostatic)

Screen Hole Size				mm
Size	A	P	T	
2" - 12"	2	3.5	1	60 mesh

Dimension		mm									
Size	inch	1.1/2	2	2.1/2	3	4	5	6	8	10	12
	mm	40	50	65	80	100	125	150	200	250	300
L		175	220	274	295	355	392	445	547	640	780
H		110	120	180	200	240	260	320	380	480	520
Plug		-	-	3/8	3/8	1/2	1/2	1/2	3/4	3/4	3/4

Material	
Model	YS-R3F
Body	IRON
Cap	IRON
Screen	S.S. 304
Gasket	ASBESTOS
Plug	SS 41